

SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyrighted, 1889, by Munn & Co.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LXI.—No. 26.
ESTABLISHED 1845.

NEW YORK, DECEMBER 28, 1889.

\$3.00 A YEAR.
WEEKLY.



1. Transmitting mechanism. 2. Perforator. 3. Punching attachment to type-writing machine. 4. Printed message. 5. Code and perforated strip. 6. Receiving a message. 7. Receiver, plan view. 8. Side view of receiver.

VISUAL SYNCHRONISM IN RAPID TELEGRAPHY.—[See page 405.]

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN.

A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S. or Canada.....\$3 00
 One copy, six months, for the U. S. or Canada.....1 50
 One copy, one year, to any foreign country belonging to Postal Union, 4 00
 Remit by postal or express money order.

Australia and New Zealand.—Those who desire to receive the SCIENTIFIC AMERICAN, for a little over one year, may remit \$1 in current Colonial bank notes. Address

MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

Is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, \$5.00 a year, for U. S. and Canada. \$6.00 a year to foreign countries belonging to the Postal Union. Single copies, 10 cents. Sold by all newsdealers throughout the country.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to any address in U. S. or Canada, on receipt of seven dollars.

The safest way to remit is by draft, postal order, express money order, or registered letter.

Australia and New Zealand.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for a little over one year on receipt of £2 current Colonial bank notes. Address MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

NEW YORK, SATURDAY, DECEMBER 28, 1889.

Contents.

(Illustrated articles are marked with an asterisk.)

Accidents from electricity.....	403	Moon, temp., in sunshine.....	405
Apparatus, air cooling.....	402	Movements, rapidity of.....	407
Appliances, railway.....	403	Needham, Elias Parkman*.....	401
Armor plate, war ships.....	404	Nitrate of soda, Chilean*.....	407
Business and personal.....	405	Notes.....	401
Carrier, paper, automatic.....	402	Notes and queries.....	408
Clutch, friction, Denton's.....	403	Obelisk, Central Park.....	401
Combustion, spon., cotton bales.....	403	Paintings, water color, fading.....	401
Crane, traveling, Arabia*.....	403	Powder, smokeless.....	403
Cut-off, rain water.....	403	Rifle, magazine, Russian.....	401
Electricity, accidents from.....	403	Ri. Am. pub., rates.....	401
Epidemic, influenza.....	401	Sphinx, mountain.....	406
Fish, poison, Indian Ocean*.....	406	Steamer, thirty-five knot.....	401
Gun, 110-ton, bending.....	404	Signal, railway, electric*.....	402
Influenza, epidemic.....	401	Synchronism, visual, in teleg.*.....	403
Institute, Pratt.....	403	Teeth, care of.....	403
Inventions, engineering.....	408	Tele., rapid, new system*.....	399
Inventions, index of.....	409	Tie, rail, Jones*.....	402
Inventions, mechanical.....	408	Uranium in Cornwall.....	401
Inventions, miscellaneous.....	408	Water supply, Albany.....	400
Language instruction by phonograph.....	400	Waves, sea, height of.....	401
		Wax figures, how made.....	404

TABLE OF CONTENTS OF
SCIENTIFIC AMERICAN SUPPLEMENT
No. 730.

For the Week Ending December 28, 1889.

Price 10 cents. For sale by all newsdealers.

I. BOTANY.—Wood Lilies.—An interesting genus of North American plants, with one of its species particularly considered and illustrated.—1 illustration.....	11653
II. CHEMISTRY.—Estimation of Silica.—By GEORGE CRAIG.—A new method of determining silica by expelling it from its compounds by the action of hydrofluoric acid.—A very ingenious contribution to analytical works.....	11656
Note on Horse Fat and its Chemical Changes.....	11656
III. CIVIL ENGINEERING.—Douglas Head Suspension Bridge and Tower.—A new suspension bridge, of very striking appearance, proposed to be constructed on the Isle of Man, to do away with the necessities of ferries or of a long day tour, with a view of the extensive harbor works at that point.—1 illustration.....	11655
English Engineering.—The progressiveness of English engineers, as helped by the civic authorities.....	11656
Highway Improvements.—A very interesting and striking paper, by Col. ALBERT A. POPE, the well known bicycle manufacturer, read before the Carriage Builders' National Association in their October meeting, being an eloquent plea for the necessity of better national and local roads.....	11657
The Channel Bridge.—Preliminary Designs by Messrs. Schneider & Co.—The continuation of this elaborate article, treating of the peculiar features of construction introduced by the circumstances of the case, involving very interesting calculations on the wave motion to which the floats will be subjected.....	11656
IV. IRRIGATION.—Arid Lands of the United States.—The points made in an address, by Major JOHN W. POWELL, upon the problem of irrigation now before the people of the United States, with proposed method of governmental dealing with the subject.....	11664
V. MATHEMATICS AND SURVEYING.—Instruments for Drawing Curves.—By Prof. C. W. MACCORD.—An examination of the point on a curve termed the witch of Agnesi.—A curious example of curved drawing, with the instrument illustrated.—3 illustrations.....	11659
The Heliograph and Heliographic Signaling.—Heliographic surveying fully described, with illustrations of the instruments employed by the United States Signal Service.—5 illustrations.....	11660
VI. MISCELLANEOUS.—About Building Associations.—The much vexed subject of loan and building associations investigated, and a common sense view taken of the scheme.....	11663
Elias Parkman Needham.—Biographical sketch of the inventor of the parlor organ.....	11664
The Nitrate Works of Chile.—An interesting review of the extraction of Chile salt-peter, with a view of the fields where it is found and the process of extraction.—1 illustration.....	11660
VII. NAVAL ENGINEERING.—New Torpedo Boat for India.—A new torpedo boat of first class size, recently built for the Indian government, her dimensions, etc.—1 illustration.....	11658
VIII. PHOTOGRAPHY.—A New Magnesium Flash Lamp.—A very ingenious lamp, utilizing centrifugal force for projecting magnesium powder into a flame.—1 illustration.....	11662
Photo-Etching Method for Making Intaglio Plates.—Photo-reproduction by recent processes described, with full details.....	11662
IX. PHYSICS.—A Trick Based upon the Principle of Inertia.—A very ingenious experiment in physics without apparatus.—1 illustration.....	11663
The Hydraulic Top.—A very ingenious physical toy.—1 illustration.....	11663
X. PHYSIOLOGY.—An Experiment in Color Blindness.—By JOHN SPILLER.—A very interesting paper on this much discussed problem, showing how santonine taken internally can affect the color sense.....	11665
XI. TECHNOLOGY.—Aero-Condenser for Drying Paper.—A plant for use in printing offices, for drying sheets of books.—1 illustration.....	11659
Historical Notes upon Explosives and Blasting.—By OSCAR GUTTMANN.—A very curious and deep investigation of the history of gunpowder, giving early anagrams in use by the alchemists.....	11661

THE ELECTRIC-LIGHT TROUBLES IN NEW YORK.

The business of renting arc lights in New York city, save in isolated plants, has been almost wholly given up for the present; the companies discharging the men connected with their distributing service and preparing to devote themselves to making and selling plant.

The indiscriminate cutting of arc light wires has destroyed many thousands of dollars worth of property and rendered still more costly plant and construction comparatively valueless, and though it has long been clear that energetic measures were required on the part of the authorities, because of the danger to life as well as property made imminent by the constant appearance of vagrant currents of high tensions along low tension and often bare wires, it is to be regretted that what in all probability were the chief aggressors, to wit, the telegraph companies, including burglar, time, messenger, and similar services, have been left undisturbed.

Looking back upon the immediate causes of that public inquietude which led up to the adoption of the present measures, we shall find that, save where the victim's foolhardiness brought about his fate, the arc light system was only indirectly the cause of the accidents. It is an undisputed fact that the telegraph companies do not remove their dead wires, probably because of the expense and trouble. There are hundreds, doubtless thousands, of these, and, as every observer is aware, these are constantly parting. You can look out of the back window of almost any house and discover broken wires of one kind or another swaying to and fro, and such a sight is not by any means infrequent in the streets, especially in the side streets. Now, a dead wire, if broken and yet not hanging down far enough to interfere with the roadway or sidewalk, may remain for an indefinite period, swaying about. Its condition will not be noticed at the central office, because it is not in use.

Such wires, there is reason to believe, have been circuiting the arc currents, swaying hither and thither, and charging now this wire, now that, with the terrible intensity. The best part of the evidence yet adduced points that way. The experience with arc light currents in other cities where the telegraph lines are kept under careful inspection, and no such casualties have come, helps to the conclusion.

Besides this the light companies have had to contend against the constant interference of a board of electrical control, which, in the language of the Grand Jury, "is incompetent." Inspectors, for the most part incompetent, as might be expected of appointees of a political board, were found to be slighting their duties, the circuits were not "tested every hour," as the law provides, and even if they had been it would not have been sufficient under the circumstances, because a "ground" might take place a few moments after inspection.

POSITION OF THE PLANETS FOR JANUARY.

MERCURY

is evening star until the 30th, and after that time becomes morning star. He reaches his greatest elongation eastward from the sun on the 13th, at 8 h. P. M., being 18° 51' east. He is then, and for a few days before and after, in favorable position for observation with the naked eye. He sets on the 13th, an hour and three-quarters later than the sun, and may be found in the west, about 4° north of the sunset point, becoming visible about three-quarters of an hour after sunset. Mercury is in inferior conjunction with the sun on the 30th, at 0 h. 42 m. A. M., passing between the earth and sun, like the moon at new moon.

Mercury sets on the 1st at 5 h. 31 m. P. M. On the 31st he rises at 6 h. 34 m. A. M. His diameter on the 1st is 5".6, and he is in the constellation Sagittarius.

SATURN

is morning star. He has advanced so far toward opposition that he is very favorably situated for observers during the whole month. Star gazers, who are familiar with the Sickle, will easily find the planet about 4° east of Regulus, the bright star in the handle, rising at 8 o'clock in the middle of the month.

Saturn rises on the 1st at 8 h. 52 m. P. M. On the 31st he rises at 6 h. 44 m. P. M. His diameter on the 1st is 18".2, and he is in the constellation Leo.

JUPITER

is evening star until the 10th, and morning star for the rest of the month. He is in conjunction with the sun on the 10th, at 0 h. 47 m. A. M., and passes to the sun's western side, to take his place among the morning stars. He meets Venus as he makes his way westward from the sun. The two planets are in conjunction on the 19th, at 4 h. 20 m. A. M., Jupiter being 27' north. They are, however, too near the sun to be visible, and at the time of conjunction are below the horizon.

Jupiter sets on the 1st at 5 h. 4 m. P. M. On the 31st, he rises at 6 h. 17 m. A. M. His diameter on the 1st is 30".6, and he is in the constellation Sagittarius.

VENUS

is morning star. She is of little account during the month on account of her great distance from the earth and her near approach to the sun.

Venus rises on the 1st at 6 h. 38 m. A. M. On the 31st, she rises at 7 h. 3 m. A. M. Her diameter on the 1st is 10".2, and she is in the constellation Sagittarius.

URANUS

is morning star. He is in quadrature with the sun on the 16th, at 2 h. P. M., and is then 90° west of the sun. Uranus rises on the 1st at 1 h. 21 m. A. M. On the 31st he rises at 11 h. 24 m. P. M. His diameter on the 1st is 3".6, and he is in the constellation Virgo.

MARS

is morning star. He is near enough to the earth to be readily recognized, a red star east of Spica, rising about 1 o'clock on the middle of month.

Mars rises on the 1st at 1 h. 42 m. A. M. On the 31st, he rises at 1 h. 5 m. A. M. His diameter on the 1st is 6"., and he is in the constellation Virgo.

NEPTUNE

is evening star. He sets on the 1st at 4 h. 21 m. A. M. On the 31st he sets at 2 h. 21 m. A. M. His diameter on the 1st is 2".6, and he is in the constellation Taurus.

Venus, Mercury, Jupiter, Mars, Uranus, and Saturn are morning stars at the close of the month. Neptune is evening star.

Smokeless Powder.

According to the reports of Lieut. Crozier, who has made special observations in Europe concerning the practical values of the smokeless powders, there are difficulties that interfere with their common adoption, namely: The irregularity of pressure, the quickness with which they deteriorate, and the intense heat, which burns the shell and affects the accuracy of fire.

France, Germany, and Switzerland have issued the new powder for general use, but the discovery is still in an experimental stage. Switzerland is the only country that has adopted and adhered to a definite standard of smokeless powder for any length of time. With the new Swiss Reubin-Schmidt regulation rifle the highest velocity obtained with a charge of the new standard powder adopted by this country was 1,970 feet per second, the bullet used weighing 216 grains and the powder charge thirty-one grains. The pressure, however, was dangerously great—37,000 pounds to the square inch being recorded.

Rather better results were obtained by the French with the new Lebel rifle, an initial velocity of 2,020 feet per second and 34,800 pounds pressure being recorded, the weight of the charge of smokeless powder being 43¼ grains and that of the bullet 232 grains. These are about the best results ever given with a small arm. The highest velocity with our Springfield rifle is 1,350 feet per second.

Language Instruction by Phonograph.

Edison's phonograph has scarcely, as yet, passed the period of "novelty and curiosity," but many practical applications of the instrument have already been suggested, and have in some cases been actually carried out. There is one application, however, that we have so far not heard mentioned, and that is the instruction in the pronunciation of foreign languages. It is impossible to learn to speak a foreign modern language by self-instruction, since the true pronunciation can only be acquired by personal intercourse with one who is a native or equal to one in linguistic perfection. In the future the publishers of manuals of instruction in foreign languages will find it, most likely, a paying undertaking to publish a phonographic key of the various exercises, thus enabling the learner to acquire the correct intonation and pronunciation by causing the phonograph to repeat the word or sentence until it has been perfectly imitated by himself. Perhaps this suggestion may be thought to be foreign to the purposes of a pharmaceutical journal. But our profession is so situated, in many parts of the country, that a knowledge of more than one language is almost a necessity. And while actual instruction by a competent teacher is certainly the best method, the substitution of the phonographic method appears to us to be the next best in choice. We can only throw out the suggestion here, and must leave the practical execution to those who control the phonograph.—*Amer. Druggist.*

The Albany Water Supply.

The determined and costly attempt which was made at Albany to obtain an adequate supply of water from driven wells appears to have failed. The contractors guaranteed a supply of 15,000,000 gallons a day, but as yet from 390 driven wells a supply of but about 6,000,000 gallons a day has been obtained. Professor Mason of the Rensselaer Polytechnic Institute, of Troy, in speaking of the subject recently, stated that Albany needed a supply of 20,000,000 gallons of water daily, and at the rate at which the wells are now yielding, it would require about 1,200 wells to furnish this quantity. Professor Mason believes the Hudson River to be the only adequate source of supply upon which the city can depend, but says that the river water should be thoroughly purified, and favors the adoption of a complete modern filter plant for this purpose.—*Fire and Water.*

The Pratt Institute.

We have from time to time chronicled the progress of the Pratt Institute in Brooklyn, N. Y. Although this institution cannot boast of a long existence, this has certainly been more than compensated for by an unprecedented growth and development, and by the modern, and in some respects unique, plan upon which it is organized. The rapid growth of the institution is obviously due to two causes; first, the demand for just such a school, and, second, the munificence which keeps pace with that demand.

From a perusal of the first number of the very creditable journal, *The Pratt Institute Record*, we learn that during the year several new departments have been created, among which are wood carving, clay modeling, and vocal music. Many volumes have been added to the library, and the shelving capacity has been expanded accordingly. The technical museum has received many new and interesting additions during the year, and the already capacious buildings have been enlarged so as to add 20,000 square feet of floor space.

The founder, in his address to the teachers, scholars and friends of the Institute on founder's day (October 2), mentioned a new feature which is now associated with the institution, and is known as "The Pratt Institute Thrift Association." This association is designed to assist people in general, and young people in particular, in saving and wisely investing their earnings. This association is divided into two parts, one known as the investment branch, and the other as the loan branch. The investments are made by purchasing shares of the association. These may be paid for in instalments or regular payments. They bring a fair rate of interest, and afford the safest and best kind of investment for savings. For example: One dollar per month, with the interest and premium, will in ten years amount to \$160.

The loan branch is organized with special reference to aiding in the purchase of dwelling houses by persons for their own occupation, and although the association does not purchase or build houses, its organization is something like that of existing building associations.

Mr. Charles Pratt and his associates have recently made a tour of Europe, visiting all of the principal cities and absorbing ideas which might prove in any way helpful, and while they found nothing exactly like the Pratt Institute, they could see no reason for making changes in the main features of its organization or management.

A Thirty-five Knot Steamer.

The *Engineering and Mining Journal* has seen the drawings for a new steamer intended to make the Atlantic voyage in 4½ days. She is to be 434 ft. long, 2,880 tons displacement, patterned after the French torpedo boats. The new ship is to be capable of making 35 knots an hour for 24 hours, and an average for the above voyage of 28 knots an hour.

We hope the Secretary of the Navy will inquire into this proposed boat, and if it promises to be practical, ask for authority to build one quickly. It would be a great satisfaction to the public if Congress would show spirit enough to sanction the building of even one vessel that could reach the top notch either in speed or fighting strength. So far all the additions to the navy have been ships that are lacking in these qualities as compared with the boats of some other nations.

Epidemic Influenza.

The epidemic of influenza which we have already referred to as occurring in Russia has spread into Finland and eastern Prussia, and is not unlikely to spread throughout Europe, and even reach this country. The disease travels rapidly, and has been known to make all Europe sneeze within six weeks, so that we may expect an arrival here before our winter months are over. It used to be thought that this epidemic moved in definite cycles of one hundred years. Although such an idea has long been abandoned, it is a curious fact that the influenza prevailed in America one hundred years ago, and Dr. John Warren, in a letter to Dr. Lettsom, says that "our beloved President Washington is but now recovering from a severe and dangerous attack of it."

In 1830 an epidemic started in China, it reached Russia in January, 1831, and by May it had spread to western Europe; but it only reached this country in January, 1832, and then prevailed but slightly.

Another and severe epidemic started in Russia in December, 1836; within a month it appeared in London, and rapidly spread over Europe. This time, again, America was not affected. An epidemic of considerable extent prevailed in the United States about ten years ago, and there have been various mild manifestations of the disease. On the whole, however, North America does not seem to be very favorable to the development of epidemic influenza in its worst forms, and it is unlikely that we shall have a severe visitation, if we have any at all.

The disease is not dangerous, except sometimes to

children or the aged, while the former often show a decided exemption.

There is no doubt that this new epidemic will prove a boon to bacteriology, for Seifert's micrococcus has not quite satisfied pathologists, and we anxiously await the announcement of the discovery of the influenza bacillus, only regretting for the sake of American science that the miasm always begins in the East and travels West. The bacteriological laboratories of Europe will therefore have the first chance.


The disease is undoubtedly due to some micro-organism which floats in the air, and which infects the human system, but is generally killed in so doing. For influenza is but slightly if at all contagious.

We observe that some feeling of alarm prevails lest this epidemic be a precursor to cholera, as was the case in 1831 and 1847.

There have been, however, plenty of cholera epidemics without a preceding influenza, and a great many influenza epidemics without any associate cholera. The micro-organisms of the two diseases are as essentially different as are the diseases themselves. The cholera germ lives in water and soil, the influenza germ in the air. The relation between the two diseases has been, we believe, purely accidental.—*Medical Record*.

ELIAS PARKMAN NEEDHAM.

It is with much regret we record the death in this city, on the 28th ult., at the age of 77 years, of this excel-

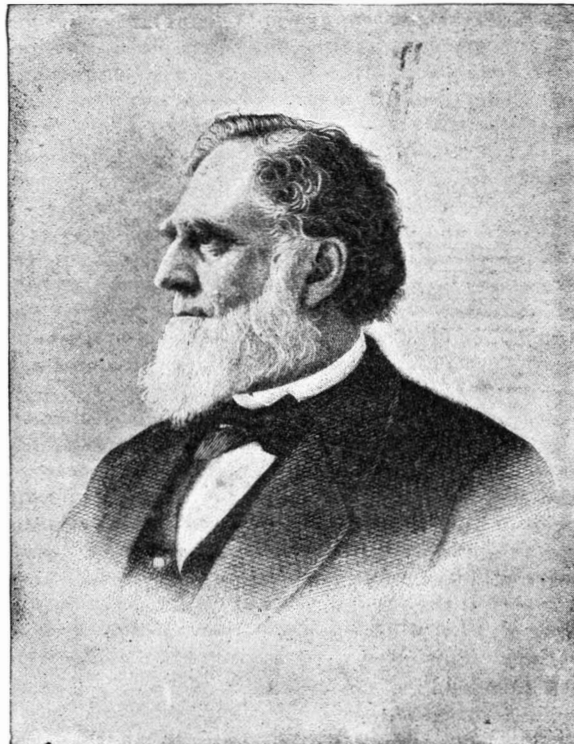**ELIAS PARKMAN NEEDHAM.**

lent man and distinguished inventor, whose portrait we here present. He was the father of the modern parlor organ industry, and of its later branch, the automatic organ. An extended biographical sketch, containing many interesting facts, is given in the current number of our SUPPLEMENT, to which readers are referred.

Notes.

The International Maritime Conference has decided not to recommend the establishment of a permanent international marine tribunal to try questions of collisions between subjects of different nationalities, nor will it recommend the adoption of an international load line, like the English Plimsoll line, beyond which no ship may legally be loaded—a wise precaution, be it said, that has doubtless been the saving of many lives, and, generally speaking, has proved a check upon thoughtless and, perhaps, conscienceless owners and masters.

The Central Park obelisk has long been known to be suffering from the rigors of the climate. The disintegration of the surface has, indeed, increased since the application of a paraffine coating, a treatment that seems to have been recommended inadvisedly, well-informed persons calling it unscientific and inexcusable. Professor Eggleston, of Columbia College, an authority on such subjects, says that, while a coating of paraffine might benefit porous stones, it is exceedingly harmful to granite—the obelisk is of red sienite, a species of granite. It was the heating, he says, that did the mischief. It opened the cracks and emptied them of the fungus growths that had been accumulating there for ages. He declares that the heating given it and the rough handling of the workmen, who ruthlessly chipped this noble stone, prying off every piece that was fissured, effected more harm than its 2,000 and more years of exposure to nature's elements. Continuing, he says: "Most granite has three different planes of dilatation. Heat applied to the surface of this stone in our climate could not fail to set all these disastrously at work. Those who did the work..."

to have taken from the obelisk and carried off 800 pounds of its substance, and the probability is that the amount was twice as great. In its present condition and place I don't believe the monolith, as such, will last more than 60 or 70 years."

A dispatch from St. Petersburg says that a new rifle has been adopted for use in the Russian army. It can be used as a single firer or as a magazine gun, the soldier being required to carry two different kinds of cartridges. Russia has steadfastly refused to adopt a magazine gun heretofore on the ground of its well-known wastefulness, the soldier, as has been proved, being inclined to fire away without taking proper aim when he can do so without reloading, thus relying upon the number of shots rather than to their effectiveness, whereas, with only one shot to fire, he has been found to be more careful of his ammunition. Under all save extraordinary circumstances the new arm will be used as a single firer.

The big find of uranium in Cornwall, in England, and the prospects of a greatly reduced price for that formerly considered rare metal, is likely to lead to its employment as a substitute for gold in many ways. With copper and platinum, alloys are made with it that rival gold in beauty, indeed, where the latter is used with it, it will successfully resist the action of acid.

The height of sea waves has long been the subject of controversy. Eminent hydrographers have insisted that storm waves were usually not more than 10 feet high, and rarely over 20 when the conditions of the sea were most favorable for wave development. Many a traveler, reclining on a cabin transom, has looked up through the skylight to see the waves rearing their frothy crests, and wondered how even a 20 footer could show so high above a great ship's deck. Many a sailor dowsed by an up-driving wave while lying out on a topgallant yard has, doubtless, shaken his head incredulously when told that the highest waves were not above 20 feet, the rest being "heel" of ship and dip of yard. Now, however, comes expert testimony to prove that storm waves are often 40 feet and sometimes from 60 to 70 feet in height. In the recent British scientific expedition some instructive data were gathered by a sensitive aneroid barometer capable of recording its extreme rise and fall by an automatic register. "With a sea not subjected to an atmosphere of unusual violence, it indicated an elevation of 40 feet from the wave's base to crest." Admiral Fitzroy, after a long series of careful measurements from the main top of his ship, came to a similar conclusion.

A recent assertion that water color paintings are affected injuriously by constant proximity to electric lights, the more delicate pigments fading in consequence, does not seem to be borne out by the facts. As a disintegrating force, daylight is known to be far more powerful than electric light of equal intensity. The latter too, as is well known, is a less active agent than daylight to photographic paper.

This is the Last Number of this Year.

This issue closes another volume of this paper, and with it several thousand subscriptions will expire.

It being an inflexible rule of the publishers to stop sending their publications when the time is up for which subscriptions are prepaid, the present subscribers to the SCIENTIFIC AMERICAN or SCIENTIFIC AMERICAN SUPPLEMENT or the ARCHITECTS AND BUILDERS EDITION of the SCIENTIFIC AMERICAN whose subscriptions expire with the year will oblige us by remitting for a renewal without delay.

By heeding this request to renew immediately, it will save the removal of several thousands of names from our subscription books, and insure a continuance of the papers without interruption.

The prices of the different publications in the United States, Canada, and Mexico are as follows:

RATES BY MAIL.

The Scientific American (weekly), one year.....	\$3.00
The Scientific American Supplement (weekly), one year....	5.00
La America Cientifica (monthly), one year.....	3.00
Architects and Builders Edition of the Scientific American (monthly), one year.....	2.50

COMBINED RATES.

The Scientific American and Supplement.....	7.00
The Scientific American and Architects and Builders Edition.	5.00
The Scientific American, Supplement, and Architects and Builders Edition.....	9.00

This includes postage, which we pay. Remit by postal or express money order or draft to order of


MUNN & Co., 361 Broadway, New York.

Tying up Branches.

Now is the time to tie together the limbs of those trees, both fruit and ornamental, that have made a long spreading growth, and whose limbs fork out. By tying all the limbs together about a foot up from where they leave the trunk, they are prevented from breaking or splitting down with the snows and ice storms of winter, as well as by strong winds.

AN IMPROVED RAIN WATER CUT-OFF.

The accompanying illustration represents a simple device which may be readily adjusted to position and manipulated to direct the flow of water from the main leader to a supply or to a waste leader, Fig. 1 being a

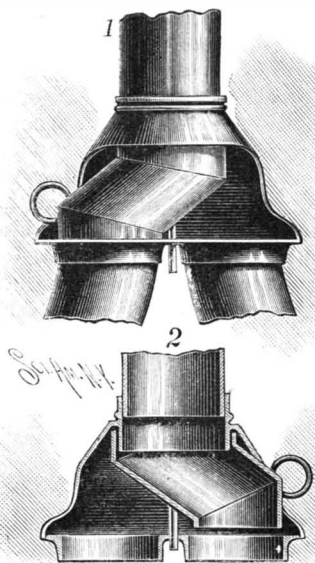


BAIRD & SANDSTROM'S RAIN WATER CUT-OFF.

face view and Fig. 2 a sectional representation. This invention has been patented by Messrs. John M. Baird and Robert Sandstrom, of Topeka, Kansas. The cut-off body is formed with a flange adapted to receive the lower end of the main leader, this flange being carried downward to receive a flange formed at the upper end of a switching tube, the lower end of this tube also having a flange adapted to fit into flanges on the delivery and waste pipes. The switching tube is guided by a central stud or pin riding in bearings in the cut-off body.

AN IMPROVED AIR COOLING APPARATUS.

The accompanying illustration represents an apparatus applicable to window or door openings for cooling the air supply, to promote comfort or contribute to the recovery of sick persons. It has been pat-

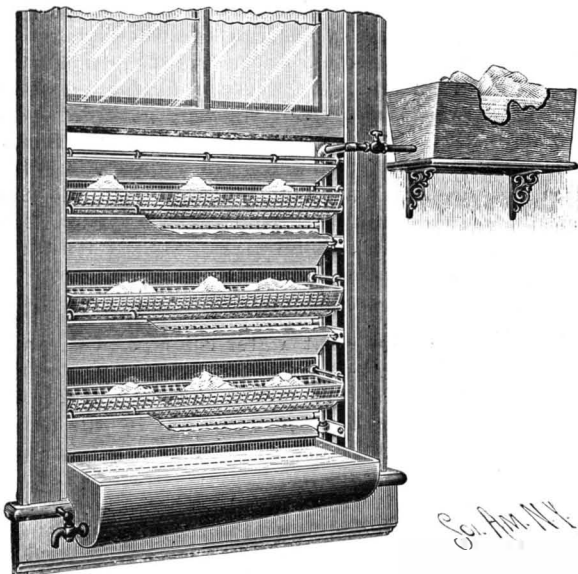


FOUQUET'S AIR COOLING APPARATUS FOR ROOMS.

ented by Mr. Leon C. Fouquet, of Andale P. O., Kansas. Frames of light metal rods with cross bars and a filling of wire netting fabric are fastened to opposite sides of a window frame below the raised lower sash, and to these frames are fixed other cross bars from which wire ice baskets are suspended. To the inner side of each basket near its top is attached a rod from which is hung a coarsely woven flannel or woolen fabric. There is also a fabric-supporting rod above the upper ice

basket, and the fabrics from all the rods are conducted outward and over deflecting rods, each fabric having at its lower edge a metal rod to hold the fabric down and prevent its being flapped about by the wind. The arrangement is such that the cold drip water from the ice baskets will trickle down over and through the fabrics into a drip tray held over the window sill, and having a laterally inclined bottom, with a faucet at one end for withdrawing the water. The fabrics are designed to spread over the full area of the window opening, thus cooling and tempering the air which enters the room. A water spray or sprinkler pipe is also arranged to be operated over each of the fabrics if desired, these spray pipes being connected with a common supply pipe communicating with a tank in which ice water is held, as shown in the illustration, or with any regular source of water supply, the flow being regulated according to the circumstances. The entire construction is designed to be light and cheap, and such as may be readily fitted to any sized window or door opening, and easily taken down and packed away in small space.

AN AUTOMATIC PAPER CARRIER FOR DRYING ROOMS.


The endless web of paper coming from a press on which wall paper is printed, and from some forms of paper-making machines, is automatically received by carriers adapted to support the web in suspended loops, and move it along gradually, with the surfaces kept separated, for considerable distances, in spacious rooms or drying lofts, whereby the paper is dried preparatory to packing it for market. A machine for automatically feeding to such a carrier the laths on which the paper is looped is represented in the accompanying illustration, and has been patented by Mr. Isaac Dunn, of New Brunswick, N. J. In front of the hopper into which the laths are thrown is a bed roller or cylinder and an upper feed-regulating wheel with radial peripheral blades, so arranged that when both are rotated, the blades or wipers of the wheel will pass but one lath at a time, flatwise, to an inclined lath chute below. The feed-regulating wheel is journaled to be adjustable to accommodate laths of different thicknesses. The lath chute is grooved at its sides to receive opposite ends of the lath, and the lowermost lath is held in the chute by retaining plates extending across the ends of the grooved sides, the floor of the chute being notched to allow of the passage of the fingers or lugs of endless carrier chains, which take the laths one at a time from the chute. These carrier chains are fitted on lower sprocket wheels on a shaft journaled at the front lower part of the frame and on upper sprocket wheels on a shaft journaled in overhead bearings. The lower shaft is rotated to operate the carrier chains by a belt from a shaft at the rear of the machine, belts from the latter shaft also operating the bed roller and the feed-regulating wheel. To assure the positive feed of the lath to the carrier chains, a lever or knocker is fulcrumed on the chute frame to project its inner end above one of the lowermost laths in the chute, as shown in the small view. The outer end of the knocker is heavier than and adapted to raise its inner end, the knocker then resting on a stop fixed to the chute. The knocker is operated by fingers or lugs on an endless chain to which motion is communicated from the feeder shaft, each of the chain lugs, in passing, raising the outer end of the knocker, and causing its inner end to strike or knock the laths to assure their positive downward feed. The shafts which carry the upper sprocket wheels of the carrier chains also carry other sprocket wheels on which run endless carrier chains, with lugs or fingers adapted to take the laths on which the paper has been looped, and carry the laths and looped paper forward any required distance through a heated room or drying loft.

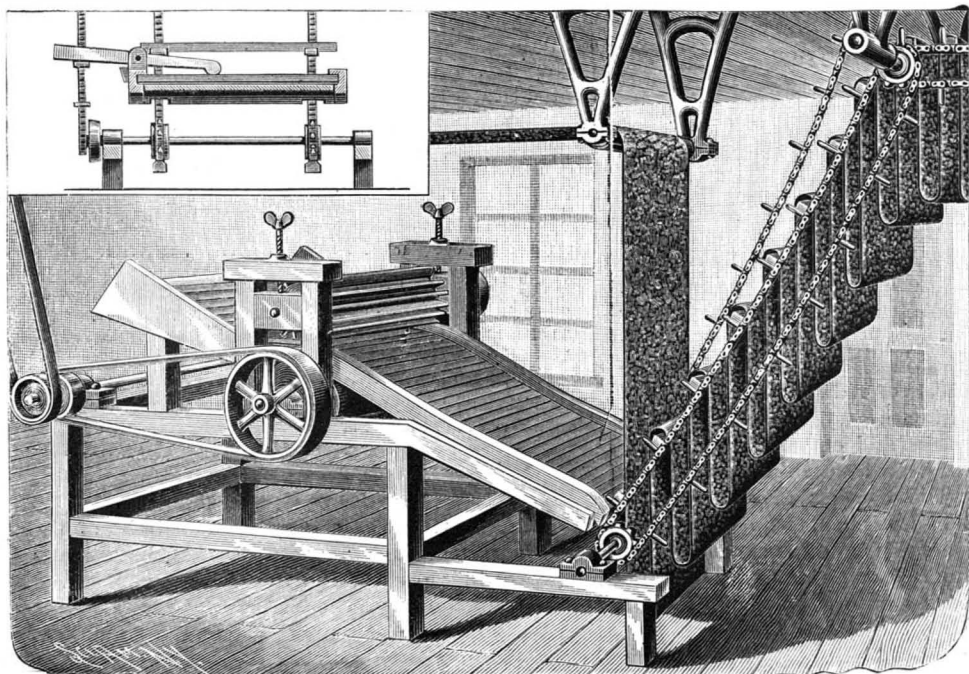

AN Erie, Pa., note says: The South Erie Natural Gas Co. struck a large well right in the thickly built up portion of the city on Nov. 23. The gas blew everything out of the well and could not be controlled. A number of wells will be put down in the immediate vicinity. Hon. F. F. Adams has begun to extend his gas plant by putting down more wells. There are fully 100 wells in and around Erie.

AN IMPROVED ELECTRIC RAILWAY SIGNAL.

A simple form of signal board to be operated by an electro-magnet is shown herewith, and has been patented by Mr. Frederick W. Frith, of Bishop's College School, Lennoxville, Quebec, Canada. At the top of a suitable standard is a lantern-supporting shelf having at its ends vertical supports for the journals or pivots of a signal board, centrally in which is a lens or bull's eye. To the lower edge of this board is attached a weight to hold the board normally in a vertical position, and on one of the journals is keyed a pinion meshing with the teeth of a rack bar, pivotally connected at its lower end with a lever which carries at its free end an armature. This lever is fulcrumed on a hanger from the lower side of the lantern-supporting shelf, and the rack bar is guided in a keeper on the journal

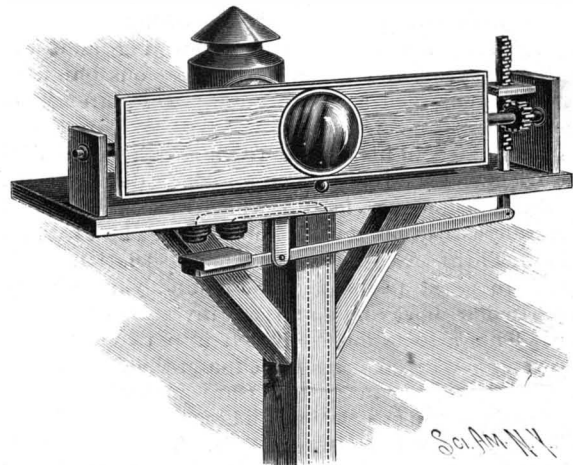


FRITH'S ELECTRIC RAILWAY SIGNAL.

support. On the lower side of the shelf, above the armature on the lever, is held an electro-magnet, the conductors leading therefrom being arranged in connection with a battery and a push button, which may be located low down on the post, or at any convenient point, as in an outlookhouse. Then, by pressing the button, the armature is drawn against the magnet, throwing the lever and swinging the signal board to a horizontal position, and exposing the white light of the lantern. Upon the circuit being opened, the weight attached to the lower side of the board carries it to the vertical position with the colored lens in front of the lantern.

AN IMPROVED RAILWAY RAIL TIE.

A railway rail tie designed to firmly hold the rails in position, and by means of which they can be readily locked to place, is illustrated herewith, and has been patented by Mr. Richard Jones, of Houston, Texas. Fig. 1 is a sectional view and Fig. 4 a perspective illustrating the application of this improvement, Figs. 2 and 3 being side views, the former showing a rail joint connection, while Fig. 5 illustrates the application of the key. At the proper distance apart in the top of the tie are transverse recesses to readily receive the

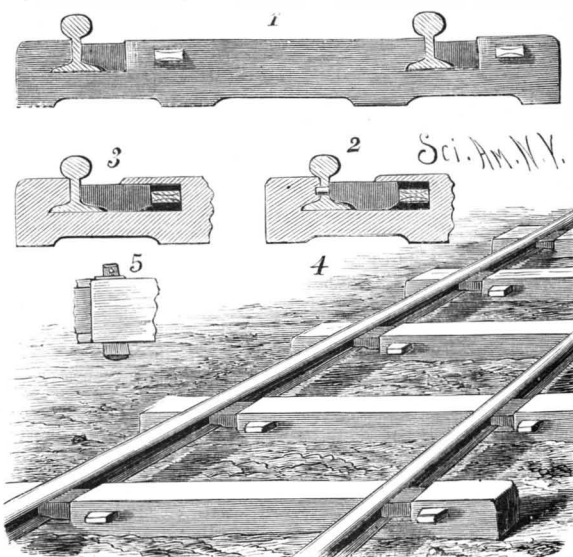

JONES' RAILWAY RAIL TIE.

rails, one side of each recess having a projection adapted to fit against one side of the rail web and the top of its base. On the opposite side of each of these recesses, centrally in the tie body, are apertures leading into each recess on the opposite side of the rail, where there is placed a retaining block of proper contour to fit against the rail web on its other side. These retaining blocks are each forced to place by means of a wedge-shaped key driven through a transverse slot in the rear of the apertures, each key being held to its place when in position by a cotter pin passed through an aperture in the small end of the key. In case the tie is to support a rail joint, the retaining blocks used in such cases are formed with a bolt-like projection adapted to pass through an aperture made therefor in the web of the rail, and into a like aperture in the opposite projection of the tie. To prevent lateral displacement of the

track, transverse ribs or projections are formed on the bottoms of the ties. A single tie of this construction can be readily placed in a track already laid without removing the rails.

Care of the Teeth.

At the meeting in Berlin last spring of the German Association of American Dentists, the best means of preserving the teeth were discussed, and Dr. Richter, of Breslau, said: "We know that the whole method of correctly caring for the teeth can be expressed in two words—brush, soap. In these two things we have all that is needful for the preservation of the teeth. All the preparations not containing soap are not to be recommended, and if they contain soap all other ingredients are useless except for the purpose of making their taste agreeable. Among the soaps the white castile soap of the English market is especially to be recommended. A shower of tooth preparations has been thrown on the market, but very few of which are to be recommended. Testing the composition of them, we find that about 90 percent are not only unsuitable for their purpose, but that the greater part are actually harmful. All the preparations containing salicylic acid are, as the investigations of Fernier have shown, destructive of the teeth. He who will unceasingly preach to his patients to brush their teeth carefully shortly before bedtime, as a cleansing material to use castile soap, as a mouth wash a solution of oil of peppermint in water, and to cleanse the spaces between the teeth by careful use of a silken thread, will help them in preserving their teeth, and will win the gratitude and good words of the public."


THE GREAT TRAVELING CRANE AT TRUBIA.

At Trubia the Spanish government has erected extensive works for the manufacture of the heaviest guns, and the establishment is now turning out armaments for the new steelcruiser Pelayo and other ships of war. Eleven inch and thirteen inch guns are the largest so far made.

Our engraving shows the new traveling crane lately erected at the Trubia works for handling these great guns and loading them upon the cars prior to removal to the coast. A beam of great strength is supported by its two ends upon a pair of hydraulic posts, each carried on a truck moved by an engine. Each truck forms, in fact, an independent locomotive. Suitable lifting gear and slings are arranged upon the beam, the gearing being worked from the ends of the beams. By means of this apparatus the heaviest guns may be quickly picked up, moved to the desired point, and the load deposited with the utmost precision. Our engraving is from *La Ilustracion Española*.

AN IMPROVED FRICTION CLUTCH.

The accompanying illustration represents a friction clutch especially adapted for hoisting machinery, in which a powerful friction and large bearing surface are required, and also designed for use on pulleys and

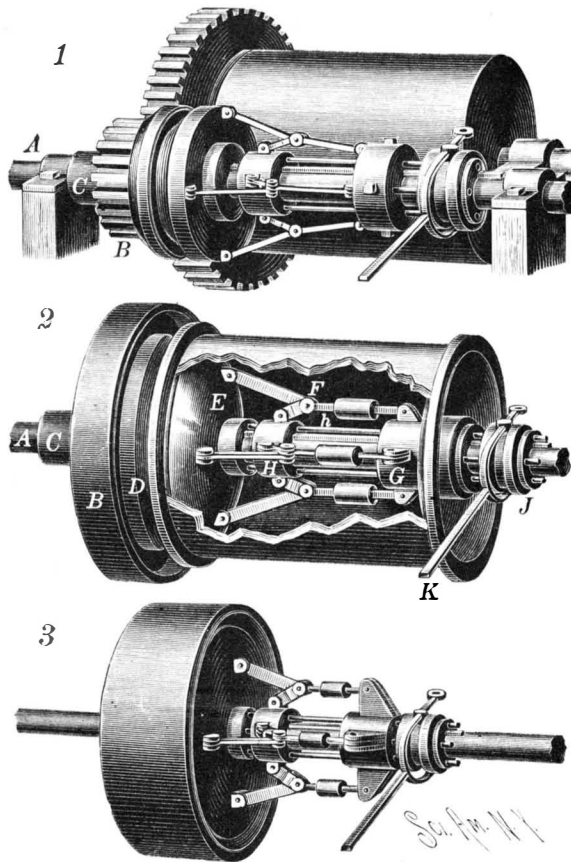

DENTON'S FRICTION CLUTCH.

shafting. It has been patented by Mr. Daniel T. Denton, of Tower, Minn. Fig. 1 shows the clutch as applied on the outside of the hoisting drum, Fig. 2 illustrating its application within the drum, and Fig. 3 its use on a pulley and shafting. On the driving shaft, A, as shown in Fig. 1, is a loose pinion, B, meshing into a gear wheel on the drum of the hoisting machine, the outer face of the pinion resting against a collar, C, fixed on the shaft, while on its inner face is formed a friction flange, adapted to be engaged by a friction clutch wheel mounted to slide on and turn with the driving shaft. As represented in Fig. 2, where the


clutch is shown applied within the drum, the pinion and gear are dispensed with, the drum itself forming a loose pulley, B, on the driving shaft, where D is the friction flange engaging the friction clutch wheel, E, which slides on a key secured to the driving shaft. The clutch wheel, E, is pivotally connected by toggle links, F, with a collar, G, keyed on the main shaft, the pivot points of the links being pivotally connected with a collar, H, also turning with and sliding on the shaft. To the collar, H, are secured rods, I, extending parallel with the driving shaft through apertures in the fixed collar, G, the outer ends of these rods being secured to a shifting collar, J, sliding on the key on the driving shaft, this collar being shifted forward and backward, to engage or disengage the clutch, by the lever, K. By pushing the lever to bring the toggle links into a straight line, the clutch wheel, E, is thrown into frictional contact with the flange, D, of the hoisting drum. Fig. 3 illustrates the similar application of the clutch to a loose pulley on a driving shaft.

Accidents from Electricity.

Two more instances of the omnipresent danger due to the present systems of electrical distribution have been afforded during the last few days in this city. On the night of November 30, two clerks were engaged in carrying a metal frame showcase from the sidewalk into a store on Eighth Avenue. One of them stepped upon an iron grating, and as he did so the metal frame of the showcase came in contact with an arc lamp hanging over their heads. Suddenly the unfortunate man dropped his end and fell insensible. He never recovered from the shock. A new name is to be added to the long list of the killed.

On the night of December 3, the passengers in a Third Avenue Elevated Railroad train were startled by hearing a noise like hail emanating from the roof of the car. It proved to be due to electricity. The car had come in contact with a low hanging wire, and had probably drawn it along until it crossed a live wire. It is said that two of the passengers in the car received shocks.

The problem of safe distribution of electric energy seems to be a difficult one. Even when the wires are underground they can shock pedestrians, and many instances are on record of men or horses being shocked from subterranean lines. Moreover, under the present system of conduits as established in New York, electric subway gas explosions are added to the list of accidents. But a few days ago an electric conduit in Minetta Street exploded, blowing out manhole covers and involving great possibilities of damage to life and property.

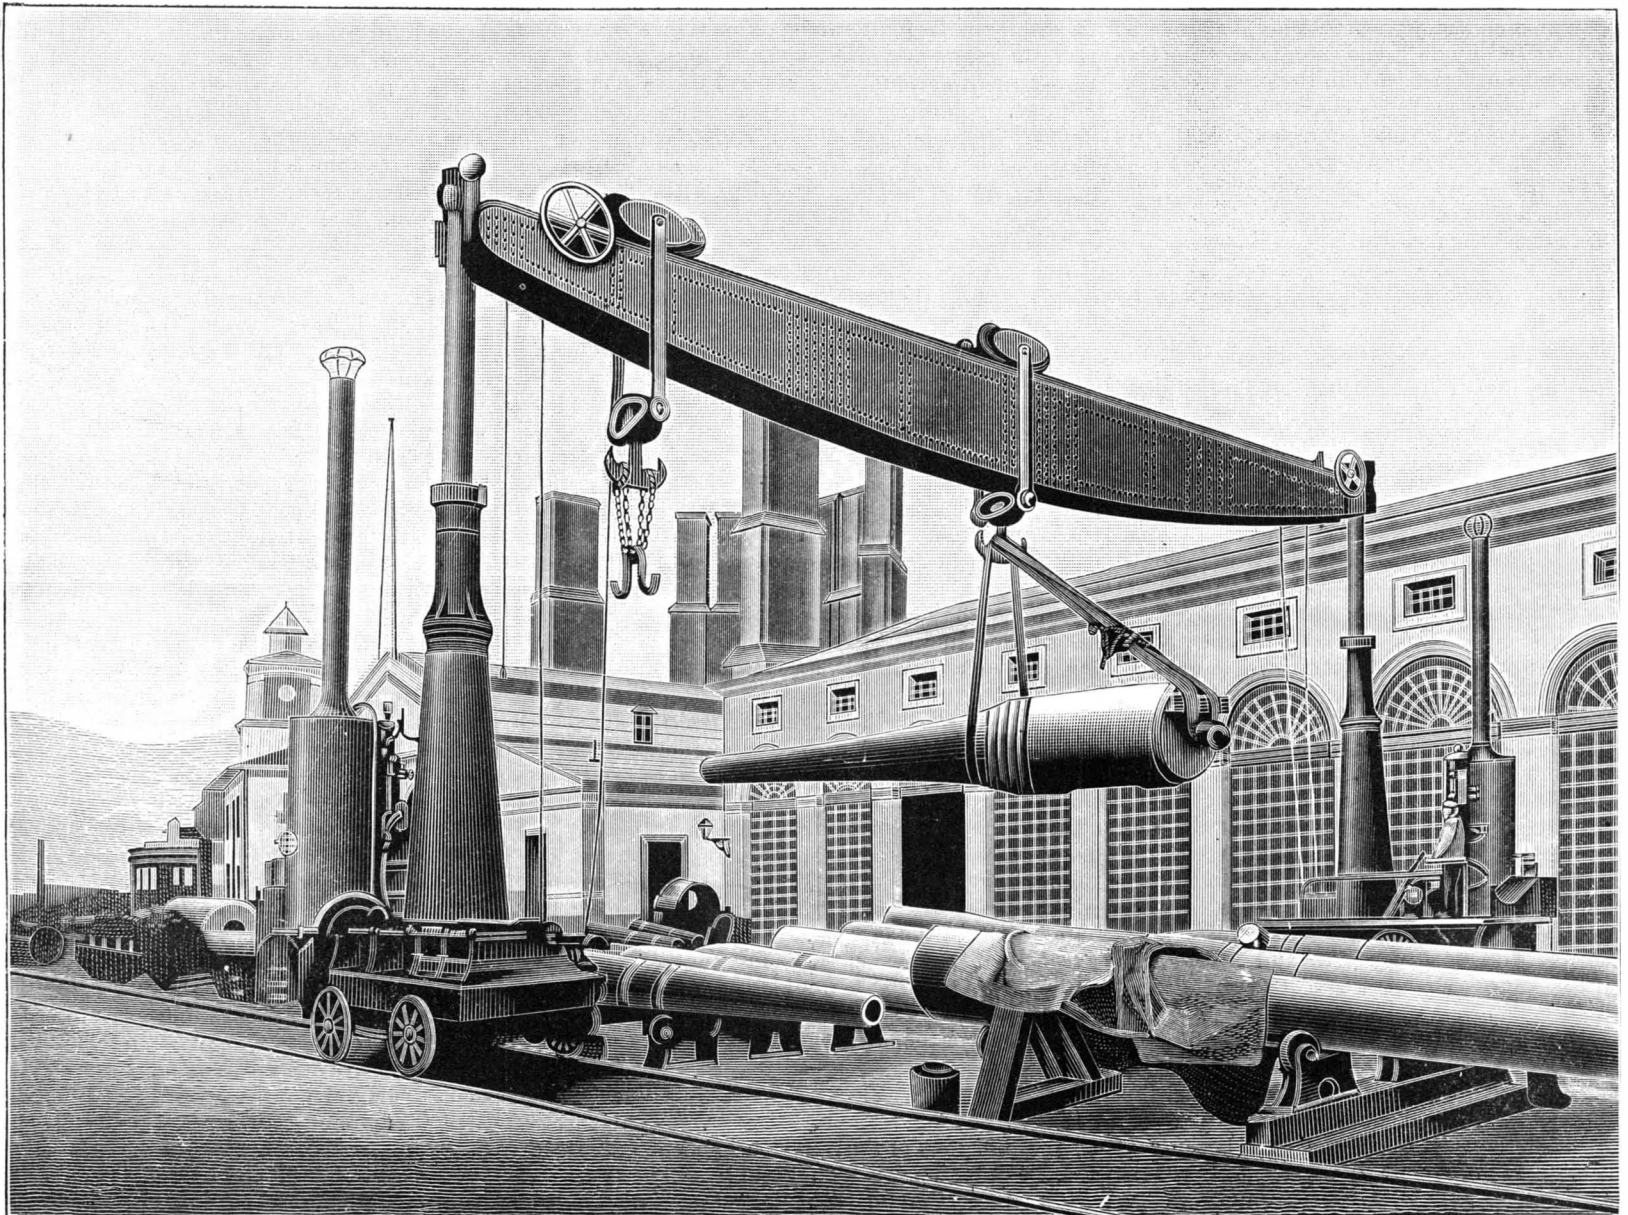

THE GREAT TRAVELING CRANE AT TRUBIA.

ARMOR PLATE FOR WAR SHIPS.

The numerous visitors to the exposition remarked with great interest, in the pavilion of the Minister of War, the huge armor plates exhibited as specimens of the armoring now applied in our navy.

The crowd stopped before these heavy and imposing masses, and were filled with astonishment on thinking of the power of the armorclads that are capable of floating with such a sheathing, and with more astonishment still, perhaps, on thinking of the power of the machinery that metallurgy now has at its disposal for obtaining such plates. The preparation of the military products serving for attack and defense was, in fact, the starting point of most of the progress realized for the last thirty years by metallurgy, and of the incessant development of its machine tools.

In this continuous contest that has been going on between the attack and the defense, between the cannon and the armor plate, it is from metallurgy that each has demanded arms. The artillery has endeavored to obtain a lighter and, at the same time, a more resistant gun, capable of giving, through the elongation of the chamber, a greater initial velocity to the projectile; and for the projectile itself, he has desired a harder and harder metal, capable, without breakage, of supporting a continually increasing energy of impact against armor plates, which themselves are becoming more and more resistant.

The engineer of naval constructions, on his part, has endeavored to give his armor plates all the resistance possible, by increasing the thickness up to extreme limits, as well as by the best distribution of the metal, the most scientific study of forms, and especially the use of harder and harder metal.

Hence result the ever new exigences in the manufacture of guns, projectiles, and armor, that have necessitated the use of larger and larger ingots, with maneuvering apparatus and rough forging and finishing tools, and the adoption of steels whose physical qualities of hardness, toughness, and homogeneity have always gone on increasing.

It is thus that metallurgy has been led to develop its tool equipment continually from all points of view, until it now works masses weighing from 90,000 to 100,000 pounds, and which forgers of former times would never have thought of handling. It has scientifically studied the metal to be elaborated, and has succeeded thereby in treating it under minutely determined physical and chemical conditions, thus making of the forge as it were a laboratory on a large scale.

Our national metallurgy can claim its part in the great progress realized by our armament, and such progress, which will allow us to await the contests of the future with more security, has been recognized by foreigners themselves, who have ordered numerous products from our national works.

The application of armor plate to ships was proposed by the eminent Dupuy de Lome in 1845, but the idea was not carried out until 1854, on the occasion of the Crimean war, and upon the personal intervention of Napoleon III. At that time there were built five floating batteries, which were protected with 4 inch armor plate of iron.

These vessels, which constituted genuine forts rather than ships, reduced the fortifications of Kinburn in a few hours on the 17th of October, 1855, and, owing to their protective armor, were but slightly injured by the enemy's fire.

This success decided the application of metallic armor to sea-going ships, and the type of it was created by Dupuy de Lome. The Gloire was the first armor-clad, and was followed by the Couronne, Flandre, Magenta, etc. The weight of the cuirass was then about 900 tons, and the number of men in the crew was from 500 to 600. Later on, about 1865, in view of the progress of rifled artillery, it was found necessary to increase the thickness of the armor plate to eight inches, and then came the type of vessels represented by the Ocean, in which the armor belt extended clear around the ship, and descended 6½ feet beneath the water, and rose in the center to form an armored redoubt carrying four 10½ inch guns.

At the four angles of this redoubt there were as many turrets armed with 9-inch guns. Analogous arrangements are found on the Redoubtable—one of the first ships constructed of iron. The substitution of metal for wood permits of reducing the weight of the hull and increasing the weight of the armor, the latter reaching 13½ inches at the load water line in the vessel under consideration. On this ship, the first one provided with armored deck, there is an octagonal redoubt protected with 11¼-inch plate and armed with four 10½-inch guns. The armor plate employed is iron and is 2¼ inches in thickness.

In the Amiral Duperre and the Amiral Baudin, the cuirass reaches its maximum thickness, so to speak, being 21½ inches at the center of the load water line and 15½ inches beneath. The huge mass thus exceeds the weight of 8,360,000 pounds, and the elements of which it consists weigh no less than from 35 to 40 tons each.

Armor plate has at the same time undergone an essential transformation that has been necessitated by

the progress of artillery. It became necessary to look for a metal harder than iron—which is too easily penetrated; and so steel has finally been applied to the manufacture. At the same time a mixed metal has been created, consisting of an iron plate covered with a layer of hard steel, designed to break the projectiles at the moment of impact.

The turrets of the Amiral Baudin were manufactured of mixed metal by the Compagnie des Forges, of Chatillon-Commentry, and the exhibit of this establishment included a curved plate weighing 70,000 pounds, and which was 13 feet long, 6½ wide, and 20 inches thick. This plate is represented lying upon the ground in Fig. 2, page 406. As for iron plates, we may mention the large one which was the admiration of all the visitors, and is shown in Fig. 1. This plate shows the result of the shot of five projectiles, the impacts of which are nearly tangent. The plate supported this test without being fissured, a result that bears witness to the great malleability of the metal. This consideration of malleability is of capital importance in deck plates, in which rents might lead to leakages, and it explains the preference shown up to the present for welded iron for the protection of decks.

After the Amiral Baudin, the thickness of armor plates tends to decrease, and upon the four armor-clads not yet finished it is reduced to 18 inches at the load water line.

If, with Engineer Hauser, we consider the course followed since the first armorclads up to the Amiral Baudin, we see that the total displacement has nearly doubled, passing from 5,800 to 11,400 tons, the wooden hull is replaced with one of iron, passing from 14 per cent to 35 per cent of displacement, and the armor passes from 4½ inches to 21½ inches, with a weight going from 16 per cent up to 35 per cent. The guns, first placed in port holes, have gradually been relegated to the turrets, and the armored redoubt has been entirely suppressed. The number of the crew has not been modified much, for although that of the Marengo reaches 750, we find that of the Amiral Baudin to be but 500—a number less than that of the Flandre.

In the artillery properly so called, the calibers of the guns, and especially the lengths of the chambers, are continually increasing in order to attain greater and greater velocities with slow-burning powders; and 12½ and 13 inch guns are now being constructed that have a chamber length of as many as forty calibers. The Societe des Forges et Chantiers de la Mediterranee exhibited a specimen of such a gun designed for the turret of a Japanese armorclad, and with which may be obtained a velocity of 229,600 feet at the muzzle.

The invention of new explosives, making it necessary to protect the live works as well as the men at all exposed points, and the desire to lighten the ship so as to give it that rapidity of evolution which is becoming more and more necessary, make it appear as if a new transformation would take place in the armor plating of ships. At all points where fissures would not be of much consequence, an endeavor will be made to employ very hard metal, capable, with a smaller mass, of arresting projectiles that would pass through thicker iron plates, and the softer and more malleable metals will be reserved for points where fissures are to be particularly feared. The progress that has been made in recent years in the metallurgy of steel fortunately permits of such a programme being carried out, and the exhibit of the Company of Chatillon-Commentry, in particular, included complete series of plates of all degrees of hardness, perfectly adapted to every application that may be had in view.

The large plate shown in Fig. 2 forms the extreme series of the soft metal. It has a resistance of penetration one-fifth greater than that of welded iron, and at the same time presents a perfect homogeneity such that iron could not possess, and at least an equal malleability.

This may be seen by an examination of the indentations made in the tests with normal and oblique firing, for such results have never been obtained with iron plates.

This metal is peculiarly well adapted for the sheathing of deck plates. Afterward came plates of medium hard metal, having an excess of resistance to perforation a quarter greater than that of iron, and which are adapted for the belts of ships. Finally, we have hard metal plates that are better adapted for the construction of light shields of all kinds, and the resistance of which exceeds that of iron by one-third. We have here a series of important results obtained by the application of scientific methods in the working of steel, and we have thought it would be of interest to make them known, by reason of the services that our navy can hope from them.—*La Nature*.

New Photographic Lens.

M. Ch. V. Zenger employs two correction lenses of magnesium glass of the same focal length, one concave and the other convex. The focal length of the system is the same as that of the spherical mirror. The time of exposure for stars of the same size is reduced to a third or a quarter.—*Comptes Rendus*.

Bending the 110 Ton Gun.

It is stated that a 110 ton Armstrong gun has bent during test. No details have as yet reached us. Mr. James A. Longridge, C.E., and General Maitland give the following particulars with regard to the life of heavy guns:

It appears that the 110 ton gun—16¼ inches—will fire 95 ordinary rounds; after this the gun is unfit for service. The 67 ton—13½ inches—will fire 127 rounds, and the 45 ton gun—12 inches—will fire 150 rounds, after which these guns are unfit for service. The cost of the 110 ton gun is £16,500, the 67 ton gun £10,900, and the 45 ton gun £6,300. Thus the cost of the 110 ton gun alone will be for each discharge of shot £174, for the 67 ton gun £86, and for the 45 ton gun £43. The cost of a single round for material alone for the 110 ton gun is as follows:

	£	s.	d.
900 lb. of powder.....	70	0	0
1,800 lb. projectile.....	80	0	0
Silk for cartridge.....	3	0	0
Deterioration of gun (life of gun taken at 95 rounds)....	174	0	0
Total net cost of each round.....	327	0	0

For the 67 ton gun:

520 lb. of powder.....	40	10	0
1,250 lb. projectile.....	55	10	0
Silk for cartridge.....	2	0	0
Deterioration of gun (life of gun taken at 127 rounds)....	86	0	0
Total net cost of each round.....	184	0	0

For the 45 ton gun:

295 lb. of powder.....	23	0	0
714 lb. projectile.....	31	0	0
Silk for cartridge.....	1	0	0
Deterioration of gun (life of gun taken at 150 rounds)....	43	0	0
Total net cost of each round.....	98	0	0

The 67 ton gun would penetrate 27 inches of wrought iron at 1,000 yards, and the 45 ton gun would penetrate 20 inches of wrought iron at the same distance.—*The Engineer*.

How Wax Figures of Celebrities are Produced.

The following is an abstract from an interview between the artist and a reporter for the New York Sun:

I can always find young women willing to pose, and, nine times out of ten, obtain a subject whose face so closely resembles the photo in question as to answer all purposes.

The "model" visits the studio and poses as the sculptor desires. First, a cast of clay is made of such portion of her anatomy as is required. About this is constructed a plaster of Paris mould, into which is poured a preparation of wax known only to this sculptor. The figure formed in this way is remarkably life-like, but by no means equal to the figures produced when a plaster cast is taken of the subject supposed to represent the individual the sculptor desires. Here it is the hard work comes in, and here it is the "model" wishes she had never agreed to undertake the task.

She is positively assured that no harm will befall her and that she will be at liberty inside of five minutes. The assertions of the sculptor restore her confidence, and she says she is willing to submit to the ordeal. She is seated in a chair and the artist retires to an adjoining room. She becomes frightened, and wonders what is coming next.

The sculptor comes in carrying with him the utensils of his trade. Again the girl is assured no harm will befall her, and she is requested to open her mouth. When she complies with this request, a quill toothpick is inserted between her teeth and she is told to keep still. In less time than it takes to tell it, her face is covered with plaster of Paris.

The quill toothpick allows the model to breathe, and the plaster of Paris, which is an inch thick, remains on her features a minute or more, until it is set. Then it is carefully taken off. The model receives from \$1.50 and upward, and her features will appear in some shop window later on as a fac-simile of some woman with a national reputation.

These figures or busts are made to order for the purpose of supplying models for stores and museums. Aside from supplying museums, the hardest work in this unique business is to furnish models for hair-dressing establishments.

Spontaneous Combustion of Cotton Bales.

The Boston Manufacturers' Mutual Fire Insurance Company has issued a circular calling attention to the danger of spontaneous combustion of bales of cotton which have become impregnated with cotton seed oil. Two bales are cited which had absorbed two hundred and fifty-six and one hundred and seventy-five pounds respectively. Leakage from barrels contained in the same cargo might account for the occurrence. Such cotton is very liable to heat and to break out into active combustion. The more frequent fires in cotton ships and warehouses, it is thought, may be accounted for on this basis. It is suggested by the company named, whose circular is signed by Mr. Edward Atkinson, the eminent statistician, that cotton bales should be watched and inspected for this source of danger. It is a good note of warning, and should be given full attention by all interested.

A NEW SYSTEM OF RAPID TELEGRAPHY.

To those familiar with the history of telegraphy and other great inventions, it appears strange that the invention of Prof. Morse should have retained its identity through all these years of telegraphic development and improvement. The original code, and substantially the original instruments, have been and are used to a greater extent than any other.

The main improvements in telegraphy up to the present time have the Morse system as a basis, and consist principally in increasing the capacity of the telegraph lines by duplexing and quadruplexing, and by the system known as "Rapid Telegraphy," in which messages are transmitted by means of a perforated strip of paper, and received upon a strip of chemically prepared paper. In all these systems the Morse code is used, and as a consequence, the message requires translation into characters which are legible to the generality of people.

Other systems of telegraphy in which the messages are delivered in print are used to a limited extent. Among these are the "Phelps printer" and the type writer telegraph; but these, as compared with the other systems referred to, are slow, and are incapable of being duplexed or quadruplexed.

For years, inventors have known that great possibilities lay in a practicable means of synchronizing instruments at the end of a telegraph line, and many attempts have been made to secure a simultaneous duplication of mechanical motions at points distant from each other. This result has been accomplished by means of the pendulum, and by the phonic wheel of LaCour, but the speed attained by these means falls far short of the ability of the current to respond in the transmission of impulses or signals.

Our attention has recently been called to an entirely new method of obtaining perfect synchronism at a very high rate of speed. This method, together with a new telegraphic code and transmitting and receiving mechanism, are the invention of Mr. J. Harris Rogers, who has also added a simple and effective punching attachment to be applied to any type-writing machine, so that the messages may be written by a type writer and simultaneously cut in the transmitting strip, the whole being combined into a system which can be operated by any person of ordinary intelligence at a speed far greater than that attained by any other system of telegraphy.

This system is fully illustrated in our front page engraving and in the diagram, Fig. 9. Fig. 1 shows the transmitting portion of the apparatus in perspective; Fig. 2 shows the manner of using the detached punching machine; Fig. 3 represents an electrical punching machine connected with an ordinary type writer; Fig. 4 is a view of the printed strip delivered by the receiving machine; Fig. 5 represents the code and a portion of a perforated strip ready for transmitting a message; Fig. 6 shows the machine receiving the message; Fig. 7 is a plan view of the printing device; and Fig. 8 is a side elevation. This system has been tested between Washington and New York in the presence of many well-known experts. The machines demonstrating this method were examined by us at the offices of the Visual Synchronism Co., at 34 Broadway, N. Y. W. B. Hopkins, general manager.

As the synchronizing apparatus is the vital portion of the system, we will first describe how the instruments at opposite ends of a long line are made to revolve synchronously. At the ends of the line are arranged instruments which are precisely alike, therefore a description of one will answer for both. Upon a shaft, B, is mounted a heavy fly wheel, A, about fourteen inches in diameter, and upon the boss of this wheel is placed a collar insulated from the boss and connected with a wire arm, *a*, which extends into a recess in the rim of the wheel, A, to a point within striking distance of the metal of the rim. This wire is otherwise insulated so that when a secondary discharge is sent through it, a spark will appear in the recess of the wheel. The secondary circuit through which the spark current is sent is generated in the induction coil, H. One terminal of the induction coil is connected with an insulated ring on the boss of the wheel, A, by means of a brush, and this ring is in electrical connection with the ring which supports the wire, *a*. The other terminal of the induction coil is connected electrically with a brush which contacts with the shaft, B. One end of the primary wire of the induction coil is connected with the battery, I; the other end is connected to the back contact of the armature lever of the relay, J, and this armature lever is connected with the remaining pole of the battery, I. Whenever a current passes through the relay, J, the primary circuit of the induction coil, H, is broken, and the impulse set up in the secondary wire of the coil produces a spark in the recess of the wheel.

Now it is evident that if the wheel, A, at the distant

station can be made to send an electrical impulse through the relay, J, once during each revolution, this will cause a spark to appear in the recess of the wheel, A, once during each revolution of the wheel at the distant station. If the spark in the recess of the wheel is produced at each time at the same point in the revolution of the wheel, it shows that the two wheels are synchronous; but if the spark appears at different points in the revolution of the wheel, it clearly shows that the wheels are not synchronous. If the spark appears to travel forward, the receiving wheel, A, is revolved slower than the distant wheel. If, on the contrary, it appears to travel backward, the speed of the receiving wheel is too high. The power is applied to the receiving wheel in such a manner as to produce an excess of speed, and the synchronizing is effected by applying either a mechanical brake or the finger or thumb to the periphery of the wheel until the speed of the receiving wheel is so reduced as to cause the spark to appear stationary. When this occurs, the instruments are in condition for transmitting or receiving messages.

Surrounding the shaft, B, there is a sun wheel, E, carrying on its periphery twelve commutator plates, numbered from one to twelve. The plate is connected through the multiple switch, N, and brush with the shaft, B, and the shaft, B, receives a current from the brush connected with one pole of the battery, I, the other pole of the battery being grounded, as shown.

Upon the boss of the wheel, A, is secured a metallic ring which is insulated from the boss, and has an angled arm, F, which reaches over the stationary sun wheel, E, and carries a brush which contacts with the commutator segments, 1, 2, 3, 4, 5, etc. A brush, *b*, touches the ring of the arm, F, and is connected with the line. It will be seen that whenever the brush car-

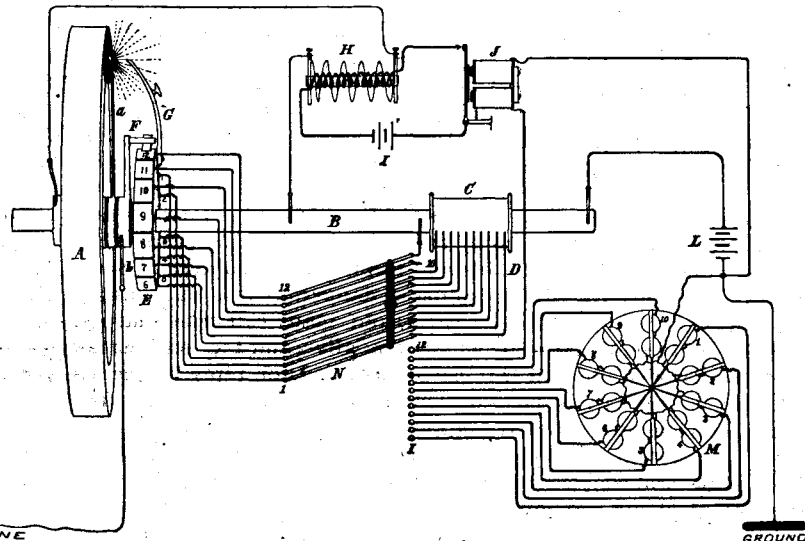


Fig. 9.—NEW SYSTEM OF RAPID TELEGRAPHY—DIAGRAM OF CIRCUITS.

ried by the arm, F, touches the commutator segment, 12, the circuit is completed over the line, and if this happens at both ends of the line simultaneously, both of the relays, J, will be worked, and the sparks will appear in the two wheels at the same time.

The sun wheel, E, is movable around the shaft, B, and is provided with an arm, G, opposite the segment, 12, which is used to move the sun wheel whenever the spark appears stationary at a short distance from its normal position. By moving this arm the sun wheel, E, with its commutator segments is brought into proper relation to the wheel, A.

Upon the shaft, B, is mounted a metallic cylinder, C, over which the perforated transmitting strip is carried with an intermittent motion, being moved forward one step for each revolution of the shaft, B. Upon the cylinder, C, rests a series of contact springs, D, numbered from one to ten, and corresponding with the commutator segments having the same numbers. The springs, D, are brought into electrical communication with the commutator segments by the multiple switch, N, and the connected wires, as shown. When the perforated transmitting strip is passed over the cylinder, C, the springs, D, rest upon the paper, or upon the cylinder, C, through the perforations of the paper.

During each contact of the series of the springs, D, with the cylinder, C, a series of contacts will be made by the brush carried by the arm, F, with the commutator segments, and there will be a correspondence in the frequency of these contacts and the position of the springs, D, in contact with the cylinder, C, so that when this brush contacts with any segment of the commutator, the brush of the receiving instrument will contact with the same segment, and will therefore actuate a section of a segment of the receiving instrument which corresponds to the same section of the transmitting instrument.

It will therefore be seen that as long as the sparks in the wheel, A, remain in a fixed position, or so long as the arm, E, can be moved so as to bring it opposite the cavity as the spark is formed, there will be perfect synchronism, and messages may be

transmitted with perfect accuracy and with a speed which produces ten or more impulses over the line for every revolution of the wheel.

The code of this system consists of ten marks, made in different positions and at different angles, the whole when combined forming a monogram like that shown in Fig. 4, and in this monogram are the elements of all of the letters of the alphabet. It is true that perfect Roman letters cannot be made from these elements, but an approximation to such letters can be formed, and the message is as legible as any printing. The marks of this monogram are produced by ten arms arranged radially, and carrying armatures which are operated by an equal number of electro-magnets. These electro-magnets are numbered from one to ten.

As shown in the diagram, the instrument is ready for the transmission of a message. By transferring the multiple switch, N, to the contacts, I, the series of magnets, M, of the receiver will be thrown into communication with the commutator segments, while the relation of the relay, J, to the system still remains the same. The apparatus is provided with a feed mechanism which carries a strip of paper under the printing arms, the feed being effected by a step by step motion, one step being produced by every revolution of the shaft, B.

Every turn of the wheel, A, produces a character or letter, and, as a consequence, when the wheel makes 1,000 revolutions per minute, 1,000 characters or about 200 words will be transmitted. If the speed is doubled, it goes without saying that the number of words will be increased in the same proportion. By the old systems of synchronizing, the greatest speed attained is 300 revolutions per minute. In the experiment of the Visual Synchronism Company above referred to, a speed of 2,500 revolutions per minute was reached.

The printing is done through the medium of an inking ribbon, so that the characters are perfect and durable, and the message is ready for delivery as soon as it leaves the machine. The strips are prepared for transmission by a small electric punching device used in connection with an ordinary type writer, so that while the message is written out upon the type writer, the paper strip is prepared for the transmission of the message.

A method of preparing strips which is somewhat more rapid than that of the type method is illustrated by Fig. 2, in which a ten-keyed perforator is used. With this machine the preparation of the message almost equals stenography in point of rapidity. It is thought by the promoters of this system that an active manipulator could transmit a speech directly by means of the ten-keyed punching machine without calling in the aid of stenography. A portion of the speech could be recorded on the strip,

and the strip torn off and carried to the transmitting machine, and transmitted while another strip was in process of preparation.

It is obvious that the speed of the transmission of words could be greatly increased by adopting a stenographic code, but this would necessitate the translation of the message.

The transmission of secret messages by this system is a feature of great importance. It is plain that any person having a typewriting machine with a punching attachment, or a ten-keyed punching machine, can prepare messages apart from any connection with the telegraph office, and send such messages to the telegraph office for transmission. As a precaution, the type-written record will be retained by the sender of the message, for future comparison with the transmitted message, if this becomes necessary.

By a simple alteration of the punching mechanism, each patron of the telegraph can have a code of his own by which messages may be transmitted, which can be read only by the aid of a key furnished by the sender. The value of this feature will be appreciated in many lines of business where it is of importance to maintain secrecy.

It is obvious that all the indistinctness and uncertainty common to the use of chemical paper is avoided in this system. The ill effects of the static charge of the line are prevented by a duplication of the relay, which permits of maintaining a continuous current upon the line. A great advantage is gained in the pause of the contact of the transmitting contact springs, thereby giving ample time for the current to act to its fullest extent.

It is, perhaps, unnecessary for us to enlarge upon the advantages of this system, as they will be apparent to any one who will examine it after acquiring a moderate knowledge of other systems of rapid telegraphy.

TEMPERATURE OF THE MOON IN SUNSHINE.—The most recent researches of Professor S. P. Langley indicate that the mean temperature of the sunlit lunar soil is probably not greater than zero Centigrade, or 32° Fah.

POISONOUS FISH OF THE INDIAN OCEAN.

BY NICOLAS PIKE.


All early voyagers to the Indian Ocean speak of the great beauty and variety of its fish. Commerson and Bougainville, in their voyage round the world in 1779, remained for a time at the Isle de France (now Mauritius) and collected over a hundred different species, of which nearly two-thirds were new to science, and of nearly all they made notes and sketches. After Commerson's death the collections were set to Buffon, but he neglected them, and later they fell into the hands of Lacepede, who described them very imperfectly from the dried specimens. Dumeril, long after, found part of the MSS. in a garret over the Museum of Paris and some sketches in Strassburg Library. They eventually found their way to Cuvier, who acknowledged their great use in preparing his "Natural History of Fish." Many distinguished men have collected fish, but few have written any account of them—past a few anatomical notes. Dr. Desjardins wrote considerably, but his MSS. have all been scattered; and M. Lienard not only wrote, but gave a valuable collection of fish to the Museum of Paris and Port Louis, Mauritius; but little is generally known of his writings.

During my residence at the latter place I had exceptional chances for collecting and studying these fish. I was fortunate enough to procure 500 species, now in the Museum of Comparative Zoology of Cambridge, Mass., where twenty-seven were described as new species and one a new genus.

No idea of their beauty can be formed from dried or alcoholic specimens; they must be seen when fresh from the bright waters of the ocean. Brilliant as are their colors, there is no place in the world where there are more that possess deleterious and even deadly qualities. So much is this the case that the government has seen fit to impose heavy fines and imprisonment on the fishermen who bring such fish to market. It was thus difficult to procure specimens of these fish, mostly unknown elsewhere; so I had to watch for the boats that came inshore outside of the city, and get them from the men, who saved them for me when caught in their seines or on their lines. Many of them are as dangerous to handle as they are poisonous for food; and others with terrible weapons in their fins are eaten when deprived of them.

Of the latter class are the *Lafs* I have written of before, but every spine is cut as soon as caught, the flesh being innocuous. The *Machaourau* (Arius) and *Cordonnier* (Teuthis) are very nice pan fish, but every fin must be cut off before they come to market. The magnificent yellow-tailed *Croissant*, glittering in scarlet, yellow and purple (a *Serranus*), grows very large, and is termed a *soulard*, or drunken fish, from its effects on its victim. They do not stop here, but the man grows delirious with sharp intestinal pains, and the whole system is deranged. I was astonished to see some fine ones landed, though not taken to market, and a fisherman told me that when well salted and prepared it can be eaten,

They are mostly yellow, some with lines and others with a dark spot. The former are eaten, but the latter are always rejected. One of the family, of an intense crimson, with yellow fins, was brought to me, and I was cautioned not to let even a cat or dog get any part of it, as it was sure death in a few minutes. It is a curious fact that in nearly all the poisonous fish the most vivid colors occur. The pretty, harmless-looking little pink and yellow fish Dr. Steindachner did me the

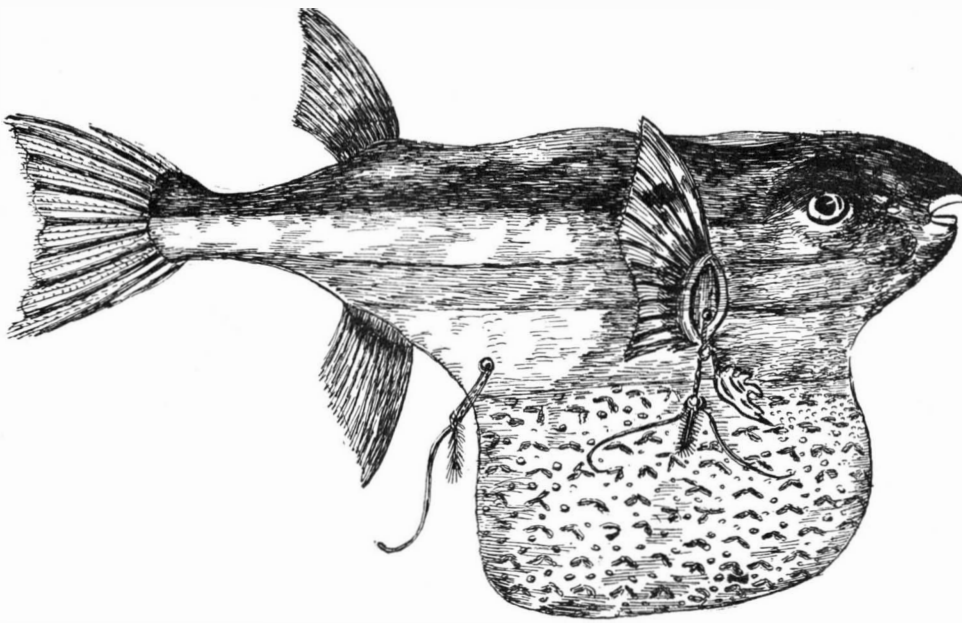

POISONOUS FISH OF THE INDIAN OCEAN.

honor to name the *Pikealunulata* is of the same deadly character. With the exception of a few of the scarlet rock cod or *Serranus* family, the fish with gray coats are the finest eating and the safest. The edible, bright colored ones are mostly coarse and strong to the taste—many so much so that they have to be skinned before cooking.

In the family of the *Gymnodontes* we have some of the most singular and poisonous fish of the ocean. Most of them go by the name of *Bourse*, and can inflate the body to double and treble its ordinary size. Some are covered with spines so dangerous it is exceedingly difficult to handle them, and many can bite sharply. I had a large *Diodon* sent me alive, and I asked the man who brought it if it would bite. For reply he picked up a thick piece of coral and put it in the creature's mouth, when it snapped it off as if it had been a pipe stem. Another *Diodon* was presented to the museum, called *Bon tau*, or porcupine fish. Every part of its body was covered with spines turned every way, so that it was almost impossible to touch it without pricking the fingers. It was brought to the museum with a rope round the body; but the taxidermist who skinned and stuffed the fish lacerated his fingers and they quickly ulcerated, the hand and arm swelled, and he was unable to use them well for months after.

Another fish of the same family, the *Tetrodon lunaris* (see plate), or *Bourse toto*, is equally with other *Tetrodons* very poisonous to man. It has no spines on the body, but has the curious appendage below that can be extended and collapsed at pleasure, covered with transparent three-sided spines of irregular shape. So many of the family have the sac that it gives the Creole name to them, viz., bourse or purse. Though its flesh is so deadly poisonous to man, like sharks and other ferocious creatures, the *lunaris* has its enemies that live and thrive on it, and doubtless in time destroy it. In one sent to the museum holes were perforated through the thick skin on the side and in the tender part of the gills, through which the parasites had made their way, and must have been very annoying to the fish. They were a bright purple and yellow. This bourse is very handsome, of an imperial blue on the back, the sides white, with a broad gold stripe extending to the eye, and the sac milk white, tuberculated between the spines. It averages about 12 to 15 inches long, and the bourse can be distended to 6 or 8 inches deep. Numbers of these fish float in the shallow waters within the reefs. Some without spines are often left by the tide on shore, which look like leather balls. The boys amuse themselves pitching them about, for, when perfectly distended, the head is almost invisible and they bounce more like a ball than a fish. When tired of playing with them, they kick them back into the water, and they soon make off. When on shore, in a collapsed state, they lie to all appearance dead; but as soon as touched by the returning tide, they recover and swiftly swim away.

Knowing my proclivities, my friends occasionally sent me a rare fish, and one day I was astonished to see a cart arrive at my door with a fish over six feet long and weighing 570 pounds! It was said to be a *Soutre*, or *Serranus*, and very rare, but poisonous. For hours my

place was besieged by people come to see the big fish. It nearly proved a white elephant, for it was no joke to dispose of 570 pounds of poisonous flesh to get the skin. Numbers of colored men and women, Malabars, and Creoles came for it, but after what they told me I did not dare to give it to them. They clamored loudly for it, saying, "It was too bad to waste so much good flesh." At length an old fisherman, who came out of curiosity, assured me it was not the *Soutre*, but a fish that looked like it, and one he had caught years ago, and safe to eat. The poor, hungry wretches yelled with delight, and such a scene took place! As fast as the flesh could be cut out it was seized, and even the entrails and gills, and, as I heard no more about it, I suppose it was edible. It now figures in the museum at Cambridge, Mass., and Mr. Bliss wrote of it that it was supposed to be the *Serranus horridus*, which grows very large in the Indian and Chinese seas.

There are two species of *Grammistes*, black or brown, with white and lilac stripes, very poisonous, and the fishermen particularly dislike to catch them in their nets. They have an odor of strong, ill-smelling soap, that remains long on the hands after handling, as I know to my cost when skinning one. Ordinary soap and water has no effect on it, and the strongest perfume scarcely covers it. These are not all the dangers in tropical seas to fish eaters. Very often the gray mullet, one of the best eating fish in these waters when

fresh, is rendered poisonous by the food taken by it occasionally. To give an instance: A friend and myself had two young mullets boiled for breakfast—one for each. After a hearty meal, in about an hour I began to feel not and grew red in the face. Presently the color spread from my hands up the arms, and from that over the whole body in waves. I took a strong dose of carbonate of soda, by my friend's advice, and lay down, for I staggered as if intoxicated. I grew red, hot, and stupefied, and at last slept very heavily for some hours. The fever had left me in sleep, and I was ghastly white on awaking, and felt weak for several days. My Creole servant told me my mullet had eaten of the "coral flowers," as he called the coral polyps, and hence the poisoning. These fish are so greedy that often, when the large polyps are expanded, they snatch at them and get a large mouthful before it has time to contract. My friend suffered no inconvenience, as his mullet had, I suppose, taken the ordinary fish food. In consequence of this, many refuse to eat of the mullet at certain seasons of the year.

It is a curious fact that with all the abundance of fish in Mauritius it is impossible to salt it so that it will keep more than a few days. There is a species of *Teuthis* slightly salted, called *Corne*, but it has to be done fresh every three or four days, as it decays so rapidly. A little fish is salted in the St. Brandon Isles, north of Mauritius; but the bulk of the article is brought from the Cape of Good Hope and the United States.

The Mountain Sphinx.

In Surrey County, North Carolina, there is a remarkable natural curiosity in the shape of a mountain resembling the famous sphinx of Egypt in all its details. It lies east of the Blue Ridge mountains, on the Piedmont plains, like a gigantic lion; its body at

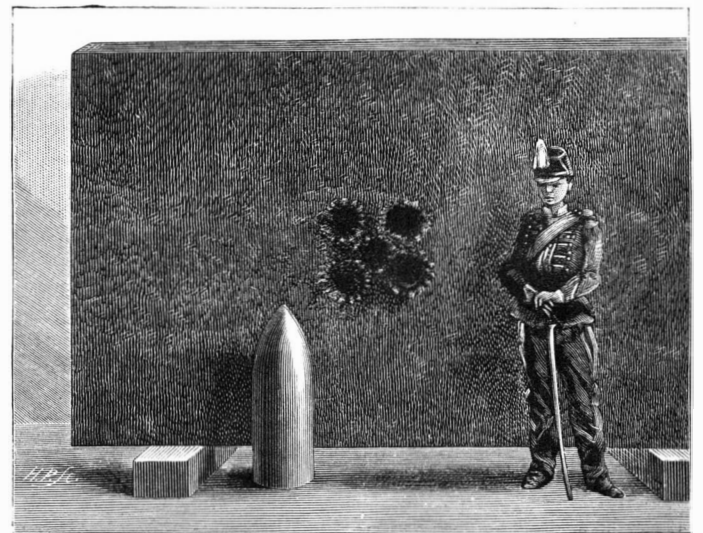


Fig. 1.—IRON TEST PLATE FROM THE FORGES OF CHATILLON-COMMENTRY.—[For description see page 404.]

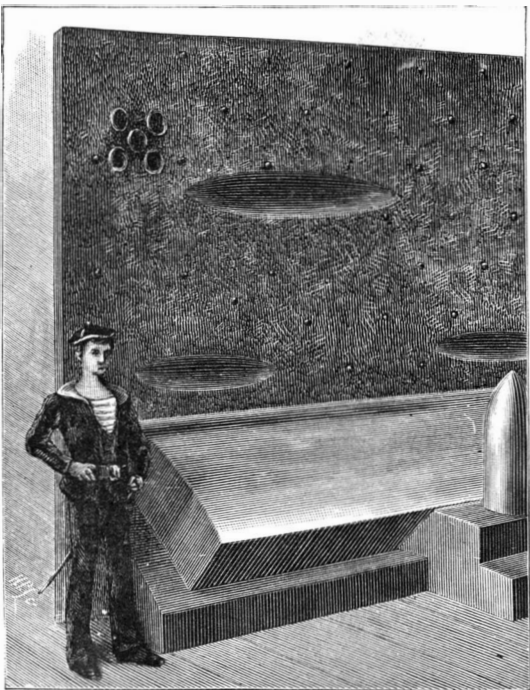


Fig. 2.—DECK PLATE OF THE SUCHET—PLATE OF THE FORMIDABLE.—[For description see page 404.]

but it would be dangerous for any but an expert to risk it. Strange to say, the white-tailed *Croissant* is quite harmless and constantly eaten, though wherein lie the poisonous qualities of the one, to all appearance the same as the other, with the exception of the tail, has yet to be discovered. A similar fact is found in fish of the genus *Genyorgoe*, called by the Creoles *Giblots*.

right angle to the ridge and with head reared aloft as if in the act of rising. The head is of solid rock, several hundred feet in height. The shoulder and breast are finely proportioned, and at the distance of a few miles it looks like a thing of life and intelligence. It rises about 1,500 feet above the plain, and can be seen for a distance of many miles.

THE NITRATE OF SODA WORKS AND FIELDS OF CHILE.

Our sketch at the top left hand shows the works of the Liverpool Company. The upper sketch at the right gives an idea of the plains where the rough nitrate is mined.

The lower engraving is a front view of the works of the Primitiva Co., which is the most completely fitted up of any of the corporations engaged in this industry.

Nitrate of soda has acquired each year a more important position in commerce and industry. It is used to make nitrate of potash or saltpeter by double decomposition with chloride of potassium. This is done at the powder works, the resulting saltpeter being used for the manufacture of gunpowder. In Europe it is used in immense quantities as a fertilizer. The agriculturists there use it as a source of nitrogen. In the United States the farming practice is so peculiar that little success has attended the efforts to introduce it here on the scale that it seems entitled to attain. If

the Tamarugal pampa, in the province of Tarapaca. The depth of these varies between 6 inches and 12 feet, and they are covered with conglomerates or a crust of porphyry, and sometimes of gneiss and syenite. The Ramirez deposits cover an area of 2,600 acres. They skirt the pampa, and are situated 57 miles from the port of Iquique by rail, and 40 miles by direct mule road.

The crude product contains about 51 per cent of nitrate of soda, 26 per cent of common salt, 6 per cent of sulphate of soda, and 3 per cent of sulphate of magnesia. The remaining 14 per cent consists of earth and insoluble matter.

The caliche, coarsely broken *in situ* into 25 or 30 pound blocks, is carried by the trains to the stamping mills, which break it into pieces two inches square, whence they are sent to the dissolving boiler. The treatment consists in dissolving the caliche in the mother-water derived from preceding treatments, and allowing the solution to crystallize. There are twelve

a conduit which leads it to a cylindrical reservoir 24½ ft. in diameter and 12 ft. in height, placed on a level with the ground. From this it is pumped up for feeding the dissolving boilers. It generally marks 90° Twaddell.


The products of crystallization are afterward spread over a floor with shovels and allowed to dry in the sun. Then they are put into bags, in order to be sent to Iquique, the shipping port for Europe and the United States.

The residua still contain 3 per cent of nitrate, the greater part of which might be extracted by further washing; but this would perceptibly reduce the concentration of the mother-water, and the evaporation would thereafter become more costly.

The work goes on during the night. The grounds are illuminated by two 6,000 candle power arc lamps.

Rapidity of Movements.

Science says a pianist, in playing a presto of Mendels-

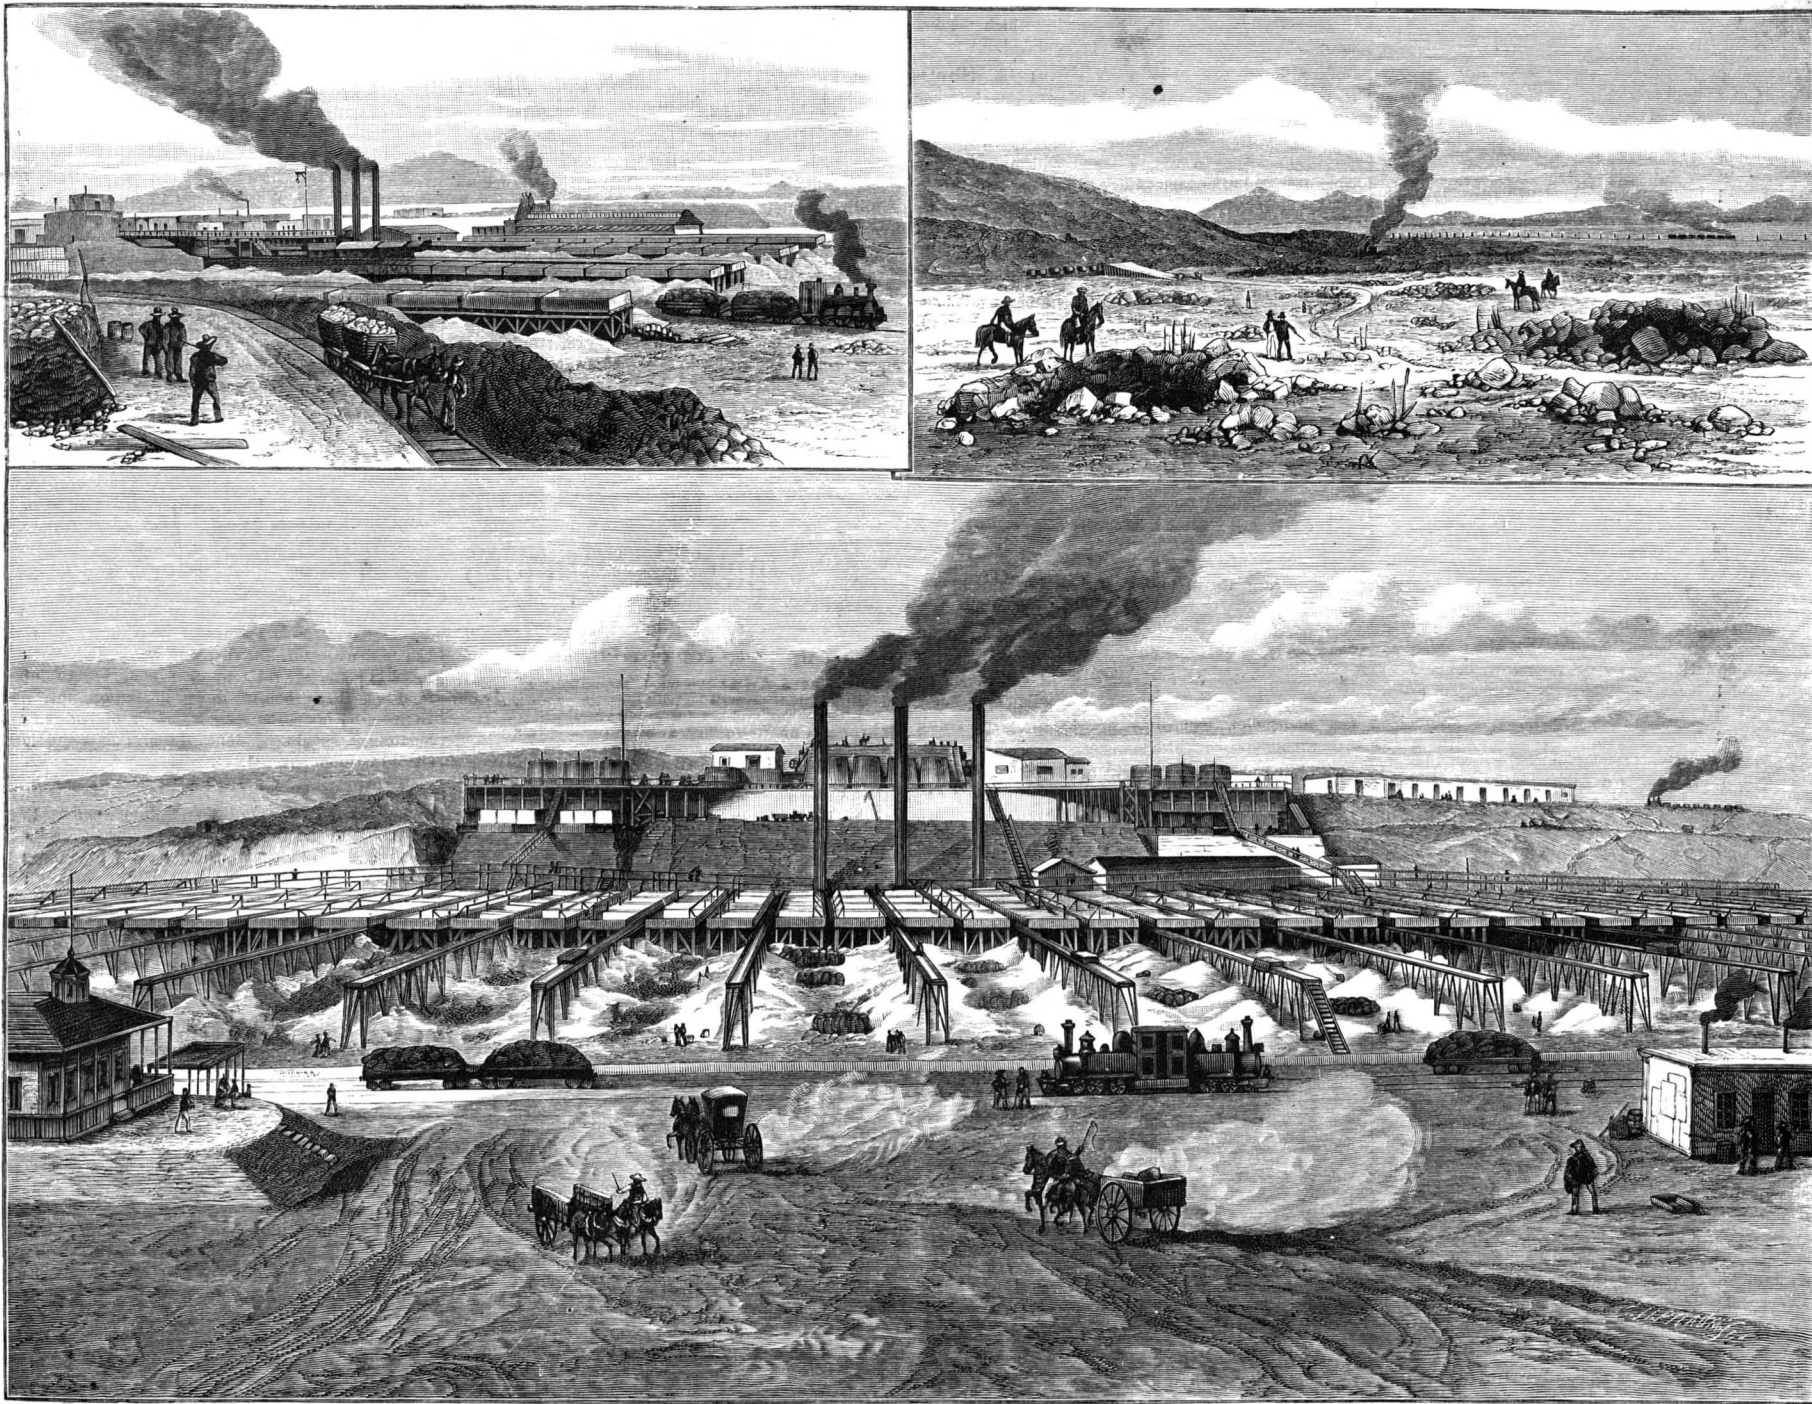

THE NITRATE OF SODA WORKS AND FIELDS OF CHILE.

mixed in with other materials to make up a fertilizer, it destroys the pulverulence of the mixture, so that it can no longer be fed regularly by mechanical seed planters or drillers. This mechanical difficulty, trifling as it seems to be, has sufficed to keep it out of American fertilizers. If any one could invent a method of mixing it with other material so as to produce a fertilizer acceptable for American farming practice, a very important market would be opened for this product. Its efficacy is unquestioned. Throughout the continent of Europe it is used in great quantities with phosphates and potash salts by the beet root cultivators and other farmers. But in America a fertilizer that does not lend itself to mechanical feeding with perfect regularity of feed, so that a given number of pounds to the acre can be distributed, is at a great disadvantage in the market.

The formation of caliche, or nitrate, beds is attributed to the decomposition of animals and vegetables in contact with saline deposits left by the sea. In support of this opinion there is cited the frequent presence of birds' skeletons, shells, fish, guano, and the eggs of sea birds in the vicinity of the deposits of caliche, even at a depth of 10 or 15 feet under the surface, and also of iodine in the form of iodate of soda.

The richest deposits are situated upon the border of

dissolving boilers, each heated by a steel worm of six spirals, in which circulates steam at four atmospheres produced in steel generators.

As soon as the solution marks 110° by the Twaddell densimeter, the steam is shut off, and things come to a standstill for a quarter of an hour, when the liquid is allowed to flow into a conduit, from whence, through secondary pipes, it reaches the crystallizing backs. Its temperature is then 115°. The residuum is washed with water, and the latter, which contains nearly all the remaining nitrate of soda, is sent to a special reservoir, from whence it is taken by a centrifugal pump and forced into the nearest dissolving boiler. When all the wash-water has been expelled, the boilers are opened and the residuum is thrown into the cars, which carry it to the dump heap.

The crystallizers are ninety in number. They are 15¼ × 15¼ ft., and have a depth of 3 ft. at one side and of 2¾ at the other, so that the precipitate may be thoroughly drained. These backs are supported by a framework of Oregon pine. Under each of them there pass six joists, whose ends carry a platform which serves as a passageway for the workmen who attend to the precipitation.

After the cooling of the liquid and the crystallization, the *agua vieja*, or mother-water, is drawn off through

sohn, played 5,595 notes in four minutes and three seconds. The striking of each of these notes, it has been estimated, involved two movements of the finger, and possibly more. Again, the movements of the wrists, elbows, and arms can scarcely be less than one movement for each note. As twenty-four notes were played each second, and each involves three movements, we would have seventy-two voluntary movements per second. Again, the place, the force, the time, and the duration of each of these movements was controlled. All these motor reactions were conditioned upon a knowledge of the position of each finger of each hand before it was moved, while moving it, as well as of the auditory effect in force and pitch, all of which involves at least equally rapid sensory transmissions. If we add to this the work of the memory in placing the notes in their proper position, as well as the fact that the performer at the same time participates in the emotions the selection describes, and feels the strength and weaknesses of the performance, we arrive at a truly bewildering network of afferent and efferent impulses, coursing along at inconceivably rapid rates. Such estimates show, too, that we are capable of doing many things at once. The mind is not a unit, but is composed of higher and lower centers, the available fund of attention being distributable among them.

RECENTLY PATENTED INVENTIONS.

Engineering.

LOCOMOTIVE BOILER.—John Sharkey, Winnipeg, Manitoba, Canada. This boiler is made with return flues and a smoke box at each end, a cylindrical steam drum extending horizontally above the entire length of the boiler, the throttle valve being located in the top of the steam drum, centrally through which is a chimney flue, with other novel features, the object being to promote economy in the use of fuel.

Railway Appliances.

CAR COUPLING.—Charles W. Duncan, St. Louis, Mo. This coupling is constructed with two laterally-yielding headed coupling jaws, an arrow-headed coupling bar projecting between the jaws, and an uncoupling slide or bar adapted, when thrust forward, to separate the jaws for uncoupling, the device operating to couple cars automatically, while the uncoupling may be effected without train men going between the cars.

CAR COUPLING.—Edward P. Eastwick, Jr., New York City. This invention relates to an improved coupler of the vertical plane type, and provides means for pivoting a removable knuckle in the drawhead in a novel manner, whereby large bearing surfaces will be obtained without greatly decreasing the strength of the knuckle, and also providing means for inserting and holding the tail bolt in the shank of the drawhead without removing the knuckle.

CAR ROOF.—Alfred P. Le Gros, Louisville, Ky. Combined with rabbeted roof boards in a car roof is a painted canvas folded and fitted into the rabbets, and a metallic cover fitting on the canvas, the invention being an improvement on a former patented invention of the same inventor, for a construction designed to facilitate the rapid draining of the car roof during heavy rain.

CAR STARTER.—Caleb T. Cleaveland, Kingston, N. Y. A ratchet is arranged for connection with the car axle, a pawl in a swinging frame engaging the ratchet, while cables or chains are connected to the frame, one of which is connected to a spring while the other is connected to a transverse draught lever, the parts being so arranged that the first pull of the horses will bear with increased effect on the forward axle of the car.

Mechanical.

INDEX FOR GEAR CUTTERS.—Michael Schirk, Plattsmouth, Neb. This is an indicator attachment designed to be applied to an ordinary slotting or gear-cutting machine, without material alteration of or injury to the machine, to show accurately the number of equal subdivisions into which the periphery of a disk is to be divided in cutting a gear wheel of any desired number of teeth.

AUTOMATIC KNIFE GRINDER.—Alfred E. Creigh, Ronceverte, West Va. This is a machine designed for use in planing mills, box factories, etc., automatically carrying the knife back and forth in contact with the grinding wheel, while the machine can be so adjusted that when the knife has been ground it will be automatically held from contact with the wheel, and the parts are so arranged that it will be impossible to draw the temper from the knife being ground.

Miscellaneous.

WEATHER STRIP.—Alexander L. Kirkpatrick, Orrick, Mo. This strip consists of a holder formed of a metal plate folded upon itself, forming inner and outer plates, their lower edges formed with flanges projecting toward each other, the plate or strip proper having its upper edge formed with a bead fitting in the holder, with a slot in the beaded edge, and a pin extending from the holder into the slot, making an effective weather strip which will not impede the opening or closing of the door.

LINIMENT.—Harriet E. Hoover, Lincoln, Neb. This liniment is designed as a remedy for sprains, burns, cuts, toothache, headache, and other pains or ailments, and is made of alcohol, oils of wintergreen, hemlock, sassafras, etc., compounded in proportions and after a manner described.

FAN FOR ROCKERS.—Hermann Wittmann, Rudolph, Wis. This is an attachment for rockers, cradles, swinging seats, etc., which may be readily and expeditiously secured in place without marring the furniture, whereby, as the chair is rocked backward and forward, a continuous lateral oscillating movement is imparted to the fan, a very slight rocking giving the fan an ordinarily sufficient movement.

ORGAN CASE.—Hiram E. Chute, Yarmouth, N. S., Canada. This is a casing with a fall board or key board cover which may be noiselessly opened by the depression of the pedals, the casing also furnishing means for the automatic closure of cracks around the pedals when the fall board is closed, whereby dust and vermin are excluded from the interior of the instrument.

PHOTOGRAPHIC CAMERA.—George S. Moler, Ithaca, N. Y. This is a camera more especially designed for instantaneous work, in which provision is made for storing and manipulating for exposure a series of dry plates, whereby a succession of photographs may be taken with great rapidity, and the plates used in irregular order if desired.

COMBINATION SCREEN.—Samuel Holdsworth, Brooklyn, N. Y. This is a screen made with pivotally connected arms and plates, the latter arranged for connection with a window casing, and guide or run ways engaged by eyes carried by the screen, the combination being such that the screen may be easily stowed, or it may, if desired, be used as an awning support.

ELECTRIC DOOR ALARM.—Edwin W. Taylor, Charlottetown, Prince Edward Island, Canada. This is an attachment for door locks and latches, by means of which an electric circuit will be completed

when the lock or latch bolt is withdrawn, the improvement being also applicable for safes, an alarm or indicating apparatus being connected in the circuit with a battery.

CHECK PUNCH.—Samuel M. Levy, New York City. This is a device for punching into checks, drafts, etc., apertures representing numerals or figures indicating the face value of the instrument, there being a block with clamping plate to hold the paper in place, rows of lugs projecting from the edges of the plate, and punches, each having on one of its prongs a pin fitting between the lugs on the clamping plate.

DRAWING AND MEASURING INSTRUMENT.—William G. Curtis, Philadelphia, Pa. This is a combination instrument in which is included a rule, dividers, calipers, beam compasses, squares, etc., the rule being adapted to use as an ordinary rule in the usual manner, and the invention covering novel parts, details, and combinations.

RULING PEN.—Reinhold Handel, Leipsic, Saxony, Germany. This is an adjustable pen, more particularly designed for ruling the stave lines for writing music, its essential feature being that the distance between the several lines drawn by it can be readily varied and adjusted, its teeth or points being all connected with a slide, by moving which the distance between the separate pens is regulated.

JEWELER'S VISE.—William G. Shepard, McCook, Neb. Each jaw of this vise is made with a horizontal recess, a seat plate fitting in the recess of one jaw with a spring behind its inner end, its tension regulated by a threaded rod and nut, the vise being designed to prevent injury to delicate work which might be injured by being clamped too tightly by the jaws.

WAD PULLER.—Myron A. Twitchell, Moline, Iowa. This is a device in which a plunger is movably held in a body portion, the plunger having at its inner or lower end a laterally operating gripper, intended for use in removing wads from shells when it is desired to remove the load.

SCIENTIFIC AMERICAN
BUILDING EDITION.

DECEMBER NUMBER.—(No. 50.)

TABLE OF CONTENTS.

1. Elegant plate in colors of a cottage for \$1,000. Perspective elevation, floor plans and details.
2. Plate in colors of \$1,500 cottage. Floor plans, perspective elevation and details.
3. View in colors of the residence of C. W. Miller, Esq., Tompkinsville, N. Y. Cost about \$20,000. Plans, elevations, details, etc. E. A. Sargeant, architect.
4. Colored plate of the residence of E. Bridgeman, Esq., Staten Island, N. Y. Cost about \$18,000. Floor plans, elevations, etc. E. A. Sargeant, architect.
5. A cottage erected at Larchmont Manor, N. Y., at a cost of \$1,500 complete. Perspective elevation and floor plans.
6. The new Bourse or Commercial Exchange at Paris, designed by M. Berteault; interior and exterior views. Cost \$1,400,000.
7. A cottage recently erected at Larchmont Manor, N. Y., at a cost of \$3,000. Floor plans and perspective. Architect W. Holman Smith, New York.
8. Cottage at Larchmont Manor, N. Y., erected at a cost of \$4,500 complete. Floor plans and perspective. Architect Henry Kilburn, New York.
9. A very attractive cottage at Iselin Park, New Rochelle, N. Y., at a cost of \$3,400 complete. Plans and perspective.
10. Residence at Holyoke, Mass. Cost \$5,500 complete. Perspective elevation and floor plans.
11. Engraving and ground plan of a church at Rutherford, N. J.
12. Residence at Larchmont Manor, N. Y. Cost \$5,800 complete. Plans and perspective.
13. A cottage at New Rochelle, N. Y. Cost \$6,000. Plans and perspective.
14. A dwelling at Roseville, N. Y., recently erected at a cost of \$8,000. Floor plans and perspective elevation.
15. A residence at Bedford Park, N. Y. Cost \$6,600 complete. Perspective and floor plans.
16. Design for a library and reading room for a country town.
17. Design for a cottage to cost about \$3,000.
18. Elevation and plan of two workmen's houses at Paris exposition.
19. Design for a house at Rosslyn, Thames Valley, England.
20. Design for a house at Woodlands, Thames Valley.
21. Miscellaneous Contents: Artistic wood decorations.—Improved wood-working machinery, illustrated.—The Caldwell sash balance, illustrated.—An improved sash chain, illustrated.—Decorative household work.—The Fuller & Warren warming, ventilating and sanitary construction.

The Scientific American Architects and Builders Edition is issued monthly. \$2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming, practically, a large and splendid MAGAZINE OF ARCHITECTURE, richly adorned with elegant plates in colors and with fine engravings, illustrating the most interesting examples of Modern Architectural Construction and allied subjects.

The Fullness, Richness, Cheapness, and Convenience of this work have won for it the LARGEST CIRCULATION of any Architectural publication in the world. Sold by all newsdealers.

MUNN & CO., PUBLISHERS,
361 Broadway, New York.

Business and Personal.

The charge for insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

Machine tools, catalogue No. 47-B; wood-working machinery, catalogue No. 52-A; steam power, catalogue No. 48. Largest lines offered by any firm in this country. Send for bed-rock prices, stating exactly what you want. S. C. Forsaith Mach. Co., Manchester, N. H.

Wanted.—A mechanical superintendent to take charge of the manufacturing department of one of the largest Canadian harvesting machine factories. Must have had practical experience in a similar position and a thorough knowledge of binder and mower construction. Box 462, Toronto, Ont.

Capital will be furnished to place on the market a patented article of undoubted merit. Address, with particulars, box 123, Cleveland, O.

Best Ice and Refrigerating Machines made by David Boyle, Chicago, Ill. 140 machines in satisfactory use.

Guild & Garrison, Brooklyn, N. Y., manufacture steam pumps, vacuum pumps, vacuum apparatus, air pumps, acid blowers, filter press pumps, etc.

For the latest improved diamond prospecting drills, address the M. C. Bullock Mfg. Co., Chicago, Ill.

Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J.

The Holly Manufacturing Co., of Lockport, N. Y., will send their pamphlet, describing water works machinery, and containing reports of tests, on application.

Turk water motors at 12 Cortlandt St., New York.

Screw machines, milling machines, and drill presses. The Garvin Mach. Co., Talcott and Canal Sts., New York.

Billings' Patent Adjustable Four and Six Inch Pocket Wrenches. Billings & Spencer Co., Hartford, Conn.

The Improved Hydraulic Jacks, Punches, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

Models, experimental work, and light machinery constructed to order. N. Erlandsen, 107 Rivington St., N. Y.

Safety Elevators, steam and belt power; quick and smooth. The D. Frisbie Co., 112 Liberty St., New York.

Belting.—A good lot of second hand belting for sale cheap. Samuel Roberts, 369 Pearl St., New York.

Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information, and not for publication.

References to former articles or answers should give date of paper and page or number of question. Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all, either by letter or in this department, each must take his turn.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each. Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(1640) J. B. G. writes: We have a well 65 feet deep, the water rises 7 feet above the surface. Water analyzed with the following result, parts per 100,000: Oxygen required 0.11, free ammonia 0.010, albumenoid ammonia 0.005, nitrous acid trace, chlorine 2.21, total solids 38.2. 1. Would this be regarded as good water for public supply? A. It is apparently an excellent water. The chlorine is perhaps a little high. 2. Is it what is called hard or soft? A. The analysis does not disclose this. It cannot be seriously hard. 3. Please reduce it to grains per gallon. A. Multiply by the decimal .05833 to effect the desired reduction.

(1641) W. H. L. asks: 1. Where, on what kind of bottom, black bass are to be found. A. Black bass are found on all bottoms, but the rocky bottom is probably the best. 2. Is a muscalonge an overgrown pickerel? A. The muscalonge is a distinct species.

(1642) W. W. P. asks: What books would be of benefit to me? I am a patternmaker. A. We can mail "Pattern Making" by a foreman pattern maker, 379 illustrations, \$3.

(1643) W. B. asks (1) Where to obtain ebonite used on the reel of an induction coil. A. From any dealer in electrical supplies. 2. How can I make any desired form of it? Can I mould it like lead? A. By turning, sawing, and filing. It cannot be melted and cast. 3. Where can I get cartridge paper? A. Use any thin, strong paper. 4. Does it make any difference how the wire is wound on the reel of an induction coil, whether it is from west to east, or east to west? A. No. 5. Is double insulated wire better to use than single insulated wire? A. Use good quality single insulated, relying on the shellac, etc., to perfect the insulating. 6. A firm who deal in Geissler tubes. A. Consult our advertising columns for dealers in scientific apparatus.

(1644) A. G. U. asks: What is the velocity given a solid body three feet long, weighing fifty pounds, in a 10 inch tube, fitting as neatly as a piston fits in a cylinder, by compressed air, at any given pressure you may select, that is, if the air follows the body, forcing it forward, what distance will the body travel before requiring a new supply of air to continue the body at the highest speed? What will be the friction to be overcome, and what is the most economical pressure of air and weight of body to use? What material should be used for best results? What do you know from actual practice here and abroad—Paris, for instance—on the subject? What effect do curves have upon it? A. We have no practical example of a heavy body as a piston moving in a long tube at high velocities. The pneumatic gun is a successful example of a heavy shell

projected by an impulse of compressed air for a short distance, a full description of which may be found in back numbers of SCIENTIFIC AMERICAN SUPPLEMENT. In a long tube a given volume of compressed air would only follow the moving body with decreasing pressure for the distance due to the amount of compression. The pressure of air must be constant behind the piston or shell within a pneumatic tube in order to keep up the speed or velocity for any considerable distance, and also greater than the friction of the piston on the tube as well as friction of the air upon the sides of the tube, and to supply windage or leakage. The moving piston should be as light as possible and of a nature to cause as little friction as possible, for friction generates heat, and the piston in a long pneumatic tube might accumulate heat enough to injure it or its contents. Pneumatic tubes in use in New York have curves on a radius of 20 to 30 times their diameter, with pistons about three times as long as wide; with these proportions the pistons run freely. They are made of thin steel covered with leather. See SCIENTIFIC AMERICAN, October 19, 1889, for illustrated description of the Johnson pneumatic tube with a rolling ball.

(1645) O. B. J. asks (1) how to split paper. A. Paste the paper between two sheets of very fine paper. When the exterior is quite dry, pull the two sheets apart, and one-half will adhere to each sheet. The points are to have the outer sheets stronger and firmer than the one to be split, and to have the latter nearly but not absolutely dry. The best flour paste works very well. If mucilage be used, it may penetrate the paper, when it will prevent splitting. It can also be sometimes done by soaking the paper and laying it on a plate of glass, and by careful manipulation dividing it. 2. A medium by which paper can be made transparent. A. Castor oil. 3. What to use to mount transparent paper on glass, so that it will retain its transparency? A. Mount with flour paste, and when perfectly dry saturate with castor oil. Dammar varnish or Canada balsam may be used to mount and render transparent in one operation. Or the paper may be wet, attached to the previously varnished glass, which has been allowed to dry until tacky, and when perfectly dry can be thinned by rubbing with the wet finger. A final varnishing completes the operation.

(1646) W. V. E. writes: I have seen what looked like plain glass, but by breathing on it you could see a picture. What was used to produce this? A. The design is very lightly etched upon the glass with hydrofluoric acid. Fluor spar moistened with sulphuric acid can be used. The process is described in our SUPPLEMENT, No. 378. 2. I want a receipt for bird lime. A. The middle bark of the holly is boiled for seven or eight hours in water, is drained, placed in heaps, and allowed to stay for two or three weeks until decomposed into a species of mucilage. It is then beaten in a mortar, kneaded with water, and allowed to stand in stone jars for four or five days. An inferior kind is made by boiling down linseed oil until thick. In the latter operation there is danger of sudden combustion; it should be done out of doors, and the pot should be kept covered.

(1647) A. T. writes: 1. How can I make axle grease out of resin oil and lime, such as Frazer axle grease? A. Dissolve $\frac{1}{4}$ pound caustic soda in 1 gallon water, add 3 pounds tallow and 6 pounds resin oil or 10 pounds oil alone. Heat to 210° Fah., stir and mix as it cools. 2. Can I feed hogs with oil cake from castor beans pressed in an hydraulic press? A. We should not recommend it. 3. I send you a sample of earth found in the neighborhood of this city; please state of what it is composed, and how I can bleach it snow white in order to fill soaps with it? A. Only by treatment with acid, which will probably make it too expensive. It contains silica, alumina and oxide of iron. 4. Has it any value as color? A. No. Possibly it might be of value for brick or terra cotta.

(1648) K. G. asks (1) if meats disinfected by chlorine or chloride of lime putrefy afterward. A. They may, if the chlorine escapes completely. 2. Would the chloride of lime prevent their use? A. It would. 3. Is Labarraque's liquor equal to chlorine as a disinfectant? A. It is about the same thing as regards efficiency. One being a gas and the other a liquid, a direct comparison is not easy. 4. Is Javelle water the same as Labarraque liquor? A. Javelle water is the same as the other, except that it contains less soda and more chlorine. 5. Which of them has the least odor? A. Javelle water freshly prepared would have the greatest odor.

(1649) L. C. asks: 1. Have you ever described a motor of one or two horse power? If so, in what number? A. No. 2. Could the eight light dynamo described in No. 600, SCIENTIFIC AMERICAN SUPPLEMENT, be used as a motor? A. Yes. 3. If so, should any changes be made? A. No. 4. About what power would the eight light dynamo develop used as a motor? A. About 1 horse power. 5. What power would the eight light dynamo develop used as a motor increased to twice the size of the one described in No. 600? A. If twice the size linear, it would be about 5 horse power. 6. What power would this motor develop if the field magnets only are increased to twice the size? A. This would give an undesirable proportion, with no advantages.

(1650) B. B. asks: In the event of lightning striking an iron roof to a building, what would the effect probably be? Would the force of the electric current be dissipated by diffusion over a large surface, or would it demolish the roof? If the latter, what precautions ought to be taken to avert disastrous consequences? A. A metallic roof is an element of safety. If there are no rods, the lightning seems to divide and make its way by several paths to the ground. To prevent disaster, the roof should be connected by several rods to earth. The rods should be well grounded.

(1651) W. B. G. asks: What is the best instrument for the drawing of an ellipse, and where can it be obtained? A. For drawing ellipses trammels may be used. They are sold by dealers in drawing materials. Ellipses can be drawn by the use of a thread and two pins. The pins are driven into the foci of the curve, the thread is tied loosely around them, and a pencil placed against the thread and straining it outward if moved around, will describe the desired curve.

(1652) J. G. asks how to make artificial ivory. A. Many processes have been used. One simple though not the most effective method consists in mixing powdered barytes with solution of white gelatine to a paste and compressing it into moulds. The above may be soaked in strong alum water with advantage.

(1653) M. L. writes: Can you recommend any method of finishing water color with a gloss? What I wish is enamel finish. A. Try varnishing with dammar varnish or Canada balsam. Good results may be obtained by cementing the picture closely against a sheet of transparent celluloid film.

(1654) S. G. asks if a current of the Edison electric light can be used for brass or copper plating of small objects of about 5 by 10 inches square. A. The current has too high a potential. This you can reduce by inserting resistance before or after your bath, equal in amount to about twenty times that of the bath.

(1655) Subscriber.—For electric wiring of buildings from a practical standpoint we recommend "Incandescent Wiring Hand Book," by Badt, \$1, and also our SUPPLEMENT, Nos. 603 and 609, which we can supply for 10 cents each.

(1656) P. O. D. asks: On what does the strength of current in a thermo-electric series depend? A. On the nature of the substances composing the couples, on their number and order, and on the difference of heat at opposite extremities. Experiments only can determine the relative thermo-electric potential of different combinations.

(1657) C. W. writes: Will you inform a reader how to remove raw linseed oil from a fine quality of brown stone, such as is used for steps? A. Our best advice is to oil the steps all over with the same oil. You cannot remove it without leaving a stain.

(1658) J. W. L. says: Please inform me how the calibers of shot guns are numbered and what part of an inch do the numbers 10, 12, 14, 16, 18 and 20 represent. I wish to make some gun tools and have not the desired information. A. No. 8 "85 diameter, No. 9 "81, No. 10 "79, No. 12 "75, No. 14 "72, No. 16 "69, No. 18 "66, No. 20 "63, No. 22 "62, No. 24 "61.

(1659) E. R. asks for the simplest and most effective method of affixing connection on carbon pole of Leclanche battery, to prevent the creeping up of the salts and the consequent corrosion. The carbons I use are electric light pencils, and cannot very well be drilled through. A. Heat one end of each rod, and fill its pores for about an inch with paraffin. Cast lead around the paraffined ends of the rods.

(1660) D. E. W. asks: 1. What can I paint the coils of the field magnet and armature of simple electric motor with, so as to have them a bright red color? A. Use shellac with a suitable pigment, English or Chinese vermilion. 2. I used tinned iron wire for my armature ring. Will it work as well as if it were bare? A. Yes. 3. How large a candle power incandescent lamp is equal to a common kerosene light? A. 8 candle. 4. Would the battery you describe to run the motor run such a light? A. Yes. 5. How many cells, consisting of two carbon plates 5x7 and one zinc 5x7, would it take to make the motor turn? A. One or two cells will make it turn. 6. Could I charge a one gallon storage battery through the day with two "disque" Leclanche cells to run a 4 or 6 candle power lamp an hour or so in the evening? How should I connect it if I could? A. The Leclanche cell is not adapted to this use. 7. What do the pocket batteries which are used to run the small incandescent scarf pins consist of? What solution is used for charging? A. Carbon and zinc plates and a bichromate solution. 8. Can I produce light, by a battery, between two carbon points $\frac{1}{4}$ inch in diameter or smaller? How large a battery will I need? A. Yes, 50 to 60 cells of Bunsen or Grove. 9. I have a number of carbons which have been used in a Leclanche "prism" battery until the battery refused to work. Now, will these carbons work nearly as well (as new ones) in a bichromate battery? A. They would work very well.

(1661) W. S. V. B. asks for a formula for making dry plate lantern slides. A. Use the Eastman or Carbutt transparency dry plate, $3\frac{1}{4} \times 4$, expose in contact with the negative, three seconds, about two feet distant from a gas burner. Develop the image with following developer:

Water..... $1\frac{1}{2}$ oz.
Sulphite soda..... 50 grs.
Eikonogen..... 4 grs.
Carbonate of potash..... 3 grs.

After development wash and fix in hyposulphite soda 20 grains, water 1 ounce. Wash for 20 minutes in changing water, then dry. For projecting the slides on a screen use a $\frac{1}{4}$ Daltor portrait lens and a 4 inch condenser. The requisite lantern may be had from manufacturers of optical goods, such as Queen & Co., Philadelphia, Pa.

(1662) Z. W. asks (1) how to get a good polish on mahogany easily. A. Mix one part of boiled linseed oil with two parts of alcoholic shellac varnish. Shake well before using. Apply in small quantities, with a cloth, and rub the work vigorously until the desired polish is secured. 2. I am making a mantel ornament; what shall I place between the woodwork and the chimney, to prevent the heat from doing injury? A. A piece of polished sheet metal. 3. How to rid a flower pot containing a century plant from ants, which has been standing in the yard all summer? A. Try filling the earth in the pot with tobacco smoke. It is said that leaves of green wormwood scattered about will disperse ants.

(1663) D. B. H. says: The creek touching our house during heavy rains gets very high and wild. When the water reaches a certain height (from 5 to 8 feet above low water line), the wells in the vicinity of 850 to 1,800 feet get very cloudy, water tasting slightly of iron properties, yet after these incessant rains the wells (among them an artesian well) have become perfectly clear and water has a fresh taste. What is the cause? A. The cloudiness in the well water at times of severe rains is no doubt caused by surface leakage, either by soakage through the top soil

near the well or by direct drainage into the wells. The carelessness in regard to well surroundings all over the country is remarked by many observers having experience in these matters. The same condition as to surface infiltration into pumping artesian wells is also observable. Water entering wells through the proper channel is filtered in all seasons alike, and should never be cloudy or muddy. Too often the spill of a pump is allowed to form a mud puddle around the well, which leaches the poison-breeding water back into the well—sources of fever and disease.

(1664) A Reader asks (1) for the process of silvering glass. I have a small galvanometer mirror from which the back has worn off, and I desire to replace it. A. Place a drop of mercury on the back of a small piece of looking glass, and the coating will become so loosened that you can push it off over the edge and catch it upon the back of your galvanometer mirror. Or you can silver it thus: Form a rim of beeswax around the edge, and pour upon it a solution of nitrate of silver containing a slight excess of ammonia, or a little more than enough to dissolve the brown oxide first formed by its addition. Ten grains of nitrate of silver to one ounce water is sufficient. To this add as it lies upon the glass half as much of a solution of the same strength of Rochelle salts in water. It should then be warmed to 70° or 80° Fah. by being placed near a fire or in the sun. 2. The recipe for making draughtsman's black and red liquid ink. A. For black, grind up India ink in a strong solution of borax. For red, dissolve 1 drachm carmine in $\frac{1}{2}$ drachm liquor ammonia 0.880 sp. gr. Dissolve 20 grains gum arabic in 3 ounces of water, and mix the two solutions.

(1665) S. L. H. asks: 1. What is the specific gravity of the oil of juniper? A. 0.850 to 0.880 at 59° Fah. 2. What is its boiling point? A. 302° to 359° Fah. 3. Where is the paper called *Chemical News* published? A. London, England. 4. Where is dynamite manufactured? A. In the United States and in Europe in a number of places. 5. What book has been published on essential oils and their manufacture? A. We recommend Brandt on "Animal and Vegetable Fats and Oils," which we can supply for \$7.50. 6. Is there any book published upon the manipulating of glass tubes and glassware, for the amateur? A. We recommend Shenstone's "Methods of Glassblowing for Amateurs," which we can supply for 80 cents. 7. Give a recipe for making an ink which will fade in say twenty-four hours, and a chemical which will bring it back again. A. Write with nitrate of silver and a quill pen. Restore by exposure to hydrosulphuric acid vapor.

NEW BOOKS AND PUBLICATIONS.

REPORTS ON THE OBSERVATIONS OF THE TOTAL ECLIPSE OF THE SUN OF JANUARY 1, 1889. Sacramento. 1889. Pp. xx, 210.

The title of this book sufficiently designates its contents. It gives the work done in observing the total eclipse of the sun in California, not only at the Lick Observatory, but by independent observers all over the State as well. It is published by the authority of the leading university of California, and forms a most important and valuable addition to the Lick Observatory publications. The photograph given as frontispiece showing the corona during total eclipse is a gem in its way.

LA LUMIERE ELECTRIQUE. By L. Montillot, director of military telegraph. Paris: J. & B. Bailliere et Fils. Pp. 408.

The subject of generators, lamps, distribution and application of electric light, are given in great detail in this volume, which is very profusely illustrated. The practical portions relating to machines on shipboard and in theaters are especially entertaining for the general reader, while its numerous *resumes* of all the changes that have been introduced in the science and of all the applications, with its numerous illustrations, make it of value to all.

ALTERNATE CURRENT MACHINERY. By Gisbert Kapp, A.M.I.C.E. New York: D. Van Nostrand Company. Pp. 199. Price 50 cents.

This addition to the well known Van Nostrand series, because of the present interest in the subject and the eminence of its author, may be said to have an especial value. It is illustrated where required.

TO INVENTORS.

An experience of forty years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequalled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices, which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 361 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

December 10, 1889,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]
Adjustable gauge, P. Nathan..... 416,737
Advertising devices for show windows, means for operating, C. E. Naylor..... 416,848
Air brake attachment, W. Rymer..... 416,953
Alarm. See Door alarm.
Alarm clock, J. W. Parrish..... 417,079
Annunciator, electrical, F. S. Carter..... 416,712
Axle box, car, E. U. Benedict..... 416,850
Bag fastener, R. Wilson..... 416,771
Bar. See Cutter bar. Detector bar. Harvester sickle bar.

Bark from tree sections, machine for removing, T. F. Horn..... 416,784
Battery. See Secondary battery. Stamp battery.
Battery plate, secondary, V. H. Ernst..... 417,158
Batting, machine for folding and compressing cotton, H. R. mbert..... 417,092
Bed, folding, J. D. Ennes..... 417,157
Bedstead, folding, W. D. Snyder..... 417,108
Bee feeder, F. E. Merriman..... 416,935
Beehive stand, S. Lipp..... 416,931
Belt, voltaic, F. A. Philippi..... 416,803
Berth register for sleeping cars, electric, F. E. Leibnitz..... 417,052
Berths, passenger recorder for sleeping car, F. E. Leibnitz..... 417,051
Bill or file holder, W. H. Cushing..... 417,155
Billet forming, process and mechanism for, Smith & Pettigrew..... 416,962
Blade holder, W. O. Cree..... 416,908
Boat. See Life boat.
Boiler. See Locomotive boiler.
Bolt, H. E. Smith..... 417,195
Boot or shoe, J. L. Joyce..... 417,044
Boot or shoe, L. E. Scafe..... 416,861
Boots or shoes while being operated upon, Jack for holding, G. H. Clark..... 417,143
Boring implement, J. W. Thackara..... 417,116
Bottle stopper, R. Bloeser..... 417,139
Box. See Axle box. Locomotive fire box. Paper box.
Box, O. V. Blittersdorff..... 416,892
Boxes, machine for attaching metal clips to cardboard, J. Geiger..... 416,908
Bracelet, W. H. Ball..... 416,887
Braiding machine, T. Finigan..... 416,905
Braiding machine, D. D. Griffin..... 417,172
Brake. See Car brake. Power brake. Truck brake.
Brake heads, balance spring for, C. C. Higham..... 417,181
Bridge, suspension, G. W. Little..... 417,054
Bridges, foundations for signal rods for draw, J. T. Hamby..... 417,177
Buckle, J. Beattie..... 416,985
Buckle and snap hook, combined, C. Smith..... 416,888
Buckle, strap, C. Smith..... 416,759
Buckle, suspender, J. Myers..... 416,942
Buggy washing device, C. R. Butts..... 416,824
Burner. See Gas burner. Hydrocarbon burner.
Butter, etc., case for packing, J. F. Rusling..... 416,751
Button fastener for gloves, etc., spring, J. Ker-shaw..... 417,191
Button hook, G. W. Mable..... 416,932
Calendars and memoranda combined, holder for, H. P. Smith..... 417,106
Camera. See Photographic camera.
Can. See Oil can.
Can opener, O. W. Ekman..... 417,010
Can opener, A. Hunter..... 417,032
Candy tray, E. F. Landis..... 417,049
Car brake, C. A. Cook..... 416,986 to 416,998
Car brake, C. V. Rote..... 416,749
Car coupling, C. W. Duncan..... 417,006
Car coupling, E. P. Eastwick, Jr..... 417,006
Car coupling, J. Skinner..... 417,103
Car door, freight, D. Manuel..... 416,793
Car, dumping, W. J. Bostain..... 416,894
Car gate, Webber & Pratt..... 416,768
Car heating device, W. Vogel..... 416,877
Car pedestal, W. Behrens..... 416,773
Car, railway, P. D. Whitehead..... 417,126
Car roof, A. P. Le Gros..... 416,928
Car starter, C. T. Cleveland..... 416,994
Cars or other vehicles, wheel fender for tram, L. Porri..... 417,085
Cars by steam and hot water, system of heating, R. D. Kimball..... 416,844
Cards and paper, apparatus for finishing the edges of, E. J. Smith..... 416,869
Carpet fabric, two-ply ingrain, F. W. Read..... 417,090
Carpet stretcher, Foster & Barker..... 416,725
Carriage, child's, C. Rousseau..... 416,750
Carriage, child's, H. H. Speck..... 417,109
Carriage seat, R. M. Stivers..... 416,872
Carrier. See Cash carrier. Thrashing machine straw carrier.
Car seat, movable, W. H. Lingle..... 417,053
Cart, self-loading dirt, S. M. Stevenson..... 416,964
Cart, soldiers, H. Gentzen..... 417,017
Case. See Instrument and medicine case. Organ case. Show case.
Case for delivering cigarettes, etc., S. Berge..... 417,137
Cash carrier, F. S. Church..... 417,147
Cash carrier, T. M. Kenney..... 416,923, 416,924
Cash carrier apparatus, R. W. Soper..... 416,870
Casting apparatus, stereotype, J. R. Cummings..... 416,717
Casting ingots or billets, H. Aiken..... 416,705
Chain, sheet metal, F. Egge..... 417,007
Chair, P. Flowers..... 416,906
Chair and lounge, combined, J. M. Groff..... 416,887
Cheese vat, E. Wagner, Jr..... 416,766
Chopper. See Cottoy chopper.
Churns, motive power for, C. W. Slagel..... 417,104
Cigar bunching machine, C. H. Haugk..... 416,911
Cigar bunching machine, Haugk & Wenigmann..... 416,912
Clasp, T. Walker..... 417,124
Clasp and tag, M. Moose..... 416,796
Cleaner. See Grain cleaner. Slate cleaner.
Clock movement and the like, H. S. Prentiss..... 416,804
Closet. See Wash-out closet.
Clothes line, H. E. Percival..... 416,854
Clothes pounder, G. C. Bronner..... 417,209
Clothes rack, folding, J. & J. J. Kauffman..... 416,843
Clutch appliance for elevators, C. R. Pratt..... 417,086
Coat and hat hook, G. W. Wright..... 417,129
Coat and vehicle apron, combined, S. C. Horn..... 417,028
Coffin, D. R. Johnson..... 417,042
Coffin fastener, J. H. Scott..... 416,956
Coins, setting for, T. F. Gaynor..... 417,016
Combination screen, S. Holdsworth..... 417,027
Commutator, J. A. Dalzell..... 416,720
Compound engine, A. J. Pitkin..... 417,083
Concrete mixing machine, E. L. Ransome..... 416,950
Corn sheller, hand, B. A. Mathewson..... 417,063
Cotton and preparing it for spinning, etc., machinery for ginning, H. U. Allen..... 416,886
Cotton chopper and cultivator, combined, B. Whitehead..... 416,890
Cotton gin feeders, distributor for, J. L. Williams..... 416,953
Coupling. See Car coupling. Pipe coupling. Pipe or hose coupling.
Culinary utensil, S. N. Bryan..... 416,711
Cultivator attachment, J. A. Harris..... 416,727
Cutter. See Paper cutter.
Cutter bar, Parker & Clark..... 416,738
Cutting square holes, machine for, W. O. Gunckel..... 417,174
Dental instrument, L. C. Bryan..... 416,989
Detector bar, A. H. Johnson..... 416,921
Die. See Watch case die.
Digging machines, tooth and tooth carrier for, W. J. Young..... 416,982
Disinfecting apparatus, E. L. Stream..... 417,113
Ditching machine, A. J. Meals..... 416,934
Door alarm, electric, E. W. Taylor..... 416,971

Door check, W. H. Clark..... 417,149
Door check, V. C. Trabold..... 416,874
Door check, pneumatic, Smiley, Jr., & Shea..... 416,758
Doubletree spring, J. A. Simpson..... 416,757
Draught equalizer, J. Kauffman..... 417,190
Draught gear for vehicles, G. M. Rust..... 416,752
Draught hook, G. Harvey..... 417,180
Drain testing apparatus, B. Meriam..... 417,210
Drawing and measuring instrument, combined, W. G. Curtis..... 416,719
Dredging apparatus, W. P. Humphreys..... 417,185, 417,186
Dredging conduit support, W. P. Humphreys..... 417,187
Dredging scraper, J. C. Coulter..... 416,999
Drier for fruit and like articles, G. & F. Frick..... 417,014
Drill. See Rock drill.
Dust conveyer, W. S. Miller..... 416,536
Dyes, making azo, R. Greville-Williams..... 417,207
Electric conductor, Saville & Winspear..... 417,095
Electric conductors, drop switch for, C. J. Van Depoele..... 417,120
Electric light support, Schardt & Lutzenberger..... 416,862
Electric machine, compound dynamo, F. B. Rae..... 417,089
Electric motors, coupling, E. W. Rice, Jr..... 416,746
Electrodes for secondary batteries, preparing, J. K. Pumpelly..... 417,068
Elevator. See Harvesting machine elevator.
Elevator, C. R. Pratt..... 417,087
Elevator or carrier apron, endless, I. M. Miller..... 417,065
Elevator starting and stopping device, C. W. Baldwin..... 416,963
Embroidering machine, R. T. Smith..... 416,811
Engine. See Compound engine. Rotary steam engine. Steam engine.
Engine link, Stiles & Cross..... 416,965
Engine link motion, C. L. Eberle..... 416,723
Engineer's seat, H. W. Knapp..... 417,192
Equalizer, four horse, P. Baker..... 416,822
Eraser, rubber, F. W. B. McCredy..... 417,073
Evener, three horse, Reinemer & Lang..... 417,091
Excavating, grab bucket or digger for, H. Grafton..... 416,836
Explosive energy, method of and apparatus for utilizing, W. Vogel..... 417,123
Extracts, apparatus for making, I. Giles..... 417,168
Extracts, apparatus for obtaining, L. Schultze..... 417,096
Eyeglass frame, L. Riemschneider..... 416,857
Fabric. See Carpet fabric.
Fan attachment for rockers, H. Wittmann..... 416,961
Fan attachment for rocking chairs, C. S. Mitton..... 417,067
Fare boxes, safety attachment for, L. F. Heck..... 416,915
Farm gate, R. Thompson..... 417,118
Feed regulator, M. A. Swing..... 416,968
Feed water regulator, R. Willetts..... 416,938
Feed water regulator and low water alarm, Cook & Thoens..... 417,150
Feeder, coagulant, J. W. Hyatt..... 417,034, 417,036
Feeder, coagulant, C. H. Kendrick..... 417,046
Feeding reagents, apparatus for, J. W. Hyatt..... 417,035
Fence, W. T. Manry..... 416,933
Fence, portable work, B. F. Swift..... 417,205
Fence post, J. W. & J. A. Osborn..... 417,077
Fences, tension device for wire, D. H. Scott..... 416,955
Fencing, M. D. Cummings..... 416,718
File, bill, H. Johnson..... 417,043
File or rasp, J. Ridge..... 416,905
Filter, R. Morris..... 417,070
Filter bed, granular, J. W. Hyatt..... 417,037
Filter strainer, J. W. Hyatt..... 417,038
Filtering apparatus, Shufeldt & Lynch..... 416,896
Filtration, apparatus for upward, J. W. Hyatt..... 417,049
Fire extinguisher, V. A. Harder..... 416,888
Fire extinguisher, automatic, E. P. Gleason..... 416,779
Fire extinguishers, automatic sprinkler nozzle or valve for, W. Harkness..... 417,095
Fire extinguishing system, automatic, Simmons & Hepburn..... 416,867
Flag staff holder, T. C. Clark..... 416,901
Floor for buildings, F. Furness..... 416,907
Fluid trap, P. R. Gray, Jr..... 417,171
Flushing apparatus, R. Walsh..... 417,125
Flushing tank, I. Shone..... 417,100
Fork. See Hay fork.
Fork, pan, and store lid lifter, combined, J. W. McPherson..... 416,736
Frame. See Eyeglass frame.
Fur dressers, hair clipping bench for, E. Schroeder..... 416,864
Furnace. See Gas furnace. Hot air distributing furnace.
Gauge. See Adjustable gauge. Speed gauge.
Garment, suspensory, C. C. Taylor..... 416,970
Gas and air, apparatus for mixing, E. B. Denny..... 416,776
Gas, apparatus for the manufacture of, T. J. Close..... 416,825
Gas burner, coal oil, L. J. W. Birn..... 416,986
Gas burner safety attachment, M. Siersdorfer..... 417,101
Gas burner safety attachment, R. P. Williams..... 416,979
Gas burner, self-lighting, E. S. Allen..... 416,707
Gas furnace, regenerative, C. M. Ryder..... 416,753
Gas governor and pressure regulator, N. J. Ditto..... 416,722
Gas light safety catch, J. D. Bowman..... 416,895
Gas lighter, electric, N. Newman..... 417,075, 417,198
Gas lighting torch, taper case, and match box, combined, Houchin & Riker..... 417,030
Gas, obtaining hydrogen, Mond & Langer..... 417,068
Gas pressure regulator, H. J. Bell..... 417,134 to 417,136
Gate. See Car gate. Farm gate.
Gate, J. C. Alexander..... 416,886
Gate, A. O. Hess..... 416,729
Gear cutting machines, index plate for, M. Schirk..... 416,954
Generator. See Steam generator.
Glass mould, R. D. Haines..... 417,176
Glass, mould for curving plate, J. Scott..... 417,097
Gold from ores, extracting, G. W. Goetz..... 416,781
Governor and cut-off valve gear, J. D. Gray..... 417,170
Grain bins, electric indicator for, Thompson & Newton..... 417,117
Grain cleaner, B. Holt..... 416,916
Graining, F. A. Walters..... 416,976
Grate, J. H. Knox..... 416,789
Grinder, automatic knife, A. E. Creigh..... 417,001
Guard. See Hand guard.
Guitar, E. J. Cubley..... 416,715
Guns, apparatus for facilitating the loading of, J. B. G. Canet..... 417,145
Gutter section and fastener, W. H. Hawkins..... 416,914
Hame fastener, N. Lage..... 416,926
Hame fastener, J. L. O'Connor..... 416,852
Hammer, foot power, M. Redlinger..... 417,201
Hammock, A. Fortenbaugh..... 417,161
Hand guard or shield, A. H. Neale..... 416,849
Handle rack, S. S. Underwood..... 417,119
Harness attachment, J. Peterson..... 416,945
Harrow, Hollister & Hull..... 417,183
Harrow and cultivator, double side, M. B. Gooing..... 416,909
Harrow, spring tooth, C. W. Conklin..... 416,965
Harvester sickle bar, J. A. Bowell..... 416,963
Harvesting machine elevator, C. D. Towne..... 416,764
Hay cap, J. H. Rice..... 416,747
Hay fork, J. Horn..... 416,917
Hay press, L. J. Brown..... 416,899
Heat registers, drying rail and foot rest for, M. A. Sims..... 417,102

Heater. See Soldering iron heater.
 Heating, liquid composition for use in systems of. M. Wanner. 417,213
 Heating vessels or chambers by steam, C. Jones. 417,189
 Heel seats, machine for beading, J. S. Matthews. 417,062
 Hinge, shutter, T. Steckel. 417,111
 Hinge, spring, H. W. Ketcham. 417,047
 Hoisting machine, J. B. Hurd. 416,840
 Holdback, vehicle, H. J. Welch. 416,818
 Holder. See Bill and file holder. Blade holder. Flagstaff holder. Opera glass holder. Paper holder. Paper bag holder. Photograph camera plate holder. Pipe holder. Shade holder. Soap and brush holder. Spool holder. Ticket holder. Trolley holder. Umbrella holder.
 Hook. See Button hook. Coat and hat hook. Draught hook.
 Horseshoe nail, W. W. Miner. 417,066
 Hose reel, W. T. Y. Schenck. 416,863
 Hot air distributing furnace, E. Molloy. 416,734
 Houses, construction of, R. Milde. 416,795
 Hydrocarbon burner, J. A. Cowles. 417,152
 Incubator, S. C. Campbell. 416,774
 Induction coil, transformer, etc., E. Thomson. 416,762
 Ingot mould, H. Aiken. 416,706
 Inkstand, A. P. Pichereau. 417,082
 Instrument and medicine case, P. A. Lilly. 416,790
 Iron, purifying, T. Twynam. 416,814
 Jack for raising cars, H. F. Campbell. 416,940
 Knife. See Pocket knife.
 Lamp hanging device, electric arc, J. McLaughlin. 416,847
 Lantern, A. H. & J. T. Crawford. 417,000
 Lantern, C. J. Higgins. 417,026
 Lantern, signal, W. P. Myer. 416,799
 Lantern, signal, W. Nelson. 416,850
 Leather, machine for treating, M. N. Howard. 416,918
 Life-boat, W. Luth. 417,195
 Lifter. See Lid lifter. Pan lifter. Transom lifter.
 Lifting and compressing device, S. B. Minnich. 416,733
 Liniment, G. Evert. 417,011
 Liniment, L. Hilke. 416,730
 Liniment, J. G. & P. H. Knipper. 417,048
 Link lifter, F. G. Grove. 417,023
 Lock. See Alarm lock. Nut lock. Wagon seat lock.
 Lock, F. Egge. 417,008
 Locomotive, Faithful & Simpkin. 416,724
 Locomotive boiler, J. Sharkey. 416,958
 Locomotive fire box, W. Malam. 417,059
 Locomotive steam engine crosshead, J. A. Stiles. 416,966
 Loom, E. H. Graham. 417,020
 Loom let-off mechanism, G. F. Hutchins. 417,083
 Loom temple, J. G. Avery. 416,708
 Malt machine, A. Wiggin. 416,769
 Match sticks, machine for making, O. C. Barber et al. 416,888
 Matrix making machines, circuit closing device for, C. L. Redfield. 416,742
 Matrix making machines, escapement device for, C. L. Redfield. 416,743
 Matrix making machines, feed device for, C. L. Redfield. 416,744
 Matrix making machines, impression device for, C. L. Redfield. 416,741
 Matrix making, type die for, C. L. Redfield. 416,740
 Mercury, extinguishing, A. Sommer. 416,760
 Metal cutting and punching machine, J. H. Sanders. 416,860
 Metal flanges, making wrought, Van Wagenen & Graves. 416,816
 Metal planing machine, L. W. Pond. 417,084
 Metals by electricity, cutting, B. C. Tilghman. 416,873
 Metals from ores, plant for the extraction of, G. W. Goetz. 416,780
 Metallic rosette, L. E. Sagendorph. 417,094
 Milling machine, cow, J. J. Iefebor. 417,060
 Mill. See Roller mill. Rolling mill.
 Mould. See Glass mould. Ingot mould.
 Mop, A. W. Page. 417,078
 Mortising machine, C. Seymour. 417,098
 Multiple switch board testing apparatus, C. E. Scribner. 416,808
 Multiple switch boards, test circuit for, C. E. Scribner. 416,809
 Musical instrument, stringed, C. G. Schuster. 416,756
 Musical instruments, making reeds and reed plates for, M. Bray. 416,897
 Musical instruments, reed for, Morgan & Dawes. 417,069
 Musk, making artificial, A. Baur. 416,710
 Nail. See Horseshoe nail.
 Nut lock, J. F. Shoop. 416,960
 Oil burning apparatus, W. Vogel. 416,876
 Oil can, P. J. Moore. 416,939
 Oiler, E. L. Rand. 416,949
 Opera glass holder, J. S. Spencer. 416,871
 Oranges, etc., for shipment, preparing, S. Farwell. 416,834
 Organ case, H. E. Chute. 416,993
 Organs, pneumatic action for pipe, J. E. Treat. 416,974
 Oven, A. W. Howard. 416,839
 Paddle wheel, feathering, R. Forward. 417,162
 Pail support, milk, J. W. Bliss. 416,987
 Pan lifter, J. E. Mason. 417,061
 Paper bag holder, J. Lee. 416,845
 Paper bags, machine for stringing, J. West. 416,819
 Paper box, B. Osborn. 417,076
 Paper box machine, T. Flynn. 417,012
 Paper cutter, Boyer & Geyer. 417,140
 Paper fastener, H. A. Free. 417,165
 Paper holder and cutter, roll, J. B. Lawton. 416,927
 Paper holder, toilet, C. C. Johnson. 416,842
 Paper reel with printing attachment, H. T. Wilson. 416,821
 Paper roll machines, rewinding shaft for, R. W. Grosvenor. 416,782
 Paper to be used for perforating, etc., adhesive, G. H. Davis. 416,721
 Paper vessel, J. L. Sefton. 416,810
 Paper vessel, J. Veneman. 416,817
 Papers and the like, device for stringing, R. P. Stansbury. 417,110
 Pen, fountain, G. S. Parker. 416,944
 Pen, ruling, R. Handel. 417,024
 Photograph burnishing machine, H. Cray. 417,153
 Photographic camera, O. Anschütz. 417,131
 Photographic camera, G. S. Moler. 416,938
 Photographic camera plate holder, M. Juruck. 417,045
 Photographic films, manufacture of flexible, H. M. Reichenbach. 417,202
 Piano action, P. Krumscheid. 417,193
 Pianoforte protector, G. W. Warren. 416,879
 Pianos, shifting action for, H. H. Northrop. 416,800
 Pipe coupling, E. G. Williams. 417,127
 Pipe coupling flanges, making, Van Wagenen & Graves. 416,815
 Pipe holder, C. M. Danielson. 416,903
 Pipe or hose coupling, J. C. Sturgeon. 417,114
 Pipe wrench, J. A. Maloney. 416,792
 Pipes, automatic coupling for steam, J. Walker. 416,767
 Planter and cultivator, seed, I. G. Wise. 416,884
 Planter, seed, A. C. Evans. 417,159
 Plow, J. Brinkerhoff. 416,988

Plow, hand, P. D. Graham. 417,169
 Plows, plant fender for, Parker & House. 416,802
 Pocket knife, J. V. Pilcher. 416,946
 Points, signals, etc., apparatus for locking and unlocking, S. T. Dutton. 416,778
 Post. See Fence post.
 Pottery machine, W. L. Shepard. 417,099
 Power brake, L. P. Lawrence. 417,194
 Press. See Hay press. Printing press.
 Printing machines, form roller mechanism for, S. Whitlock. 416,820
 Printing oil cloth in colors, machine for, W. H. Paine. 417,199
 Printing press, cylinder, B. Huber. 416,786
 Printing surfaces, preparation of, B. A. Brooks. 417,142
 Protector. See Pianoforte protector.
 Puller. See Wad puller.
 Pulley, W. R. Edelen. 416,833
 Pulley, carrying, A. McLean. 416,943
 Pump and measuring tank, oil, H. F. McKenzie. 416,735
 Pump governor, automatic, J. A. Steininger. 417,112
 Punch, check, S. M. Levy. 416,929
 Rack. See Clothes rack. Handle rack.
 Railway block signals, electric danger alarm for, J. H. Hunter. 417,188
 Railway passenger service register, L. J. Carter. 416,991
 Railway signal, automatic, Greenwood & Jory. 417,022
 Railway switch, C. R. Dallenbach. 417,156
 Railway systems, system of supplying currents to electric, C. J. Van Depoele. 417,122
 Railway trains, protecting, J. I. Conklin. 416,713
 Railways, system of switching for conduit electric, C. J. Van Depoele. 417,121
 Rake, J. T. Thompson. 416,763
 Rake and tedder, combined, A. Iske. 417,040
 Ratchet twister, L. H. Yountee. 417,211
 Rattlers or other machinery, mechanism for driving, C. A. Bauer. 416,984
 Reel. See Hose reel. Paper reel. Wire rod reeling reel.
 Reel, J. E. Mandeville. 417,060
 Refrigerator, vacuum, B. N. J. Jacobs. 416,788
 Register. See Birth register. Railway passenger service register.
 Regulator. See Feed regulator. Feed water regulator. Gas pressure regulator. Speed regulator.
 Retort lid, F. C. Prindle. 416,855
 Rivets, etc., in jails, etc., means for concealing, W. S. Hull. 416,787
 Rock drill, J. F. Dittman. 417,004
 Roller mill, J. Dawson. 416,904
 Rolling mill, tire, J. Munton. 416,797
 Rolling mills, reeling mechanism for wire rod, C. H. Morgan. 416,940
 Rolling tires, J. Munton. 416,798
 Roofing, etc., plastic compound for, Livingston & Griscom, Jr. 416,791
 Rotary steam engine, C. V. Martin. 417,196
 Saddlers' stitching horses, attachment for, C. F. Shaw. 416,865
 Sash fastener, E. Horton. 417,029
 Sawmill dog, J. H. Miner. 416,937
 Sawmills, guard for circular, C. H. Stokes. 417,204
 Saw sharpening machine, E. B. Rich. 416,748
 Sawing machine, barrel head, J. A. Mumford. 417,071
 Sawing machines, brush attachment for, J. Robinson. 417,093
 Sawing machine, portable, W. D. Gunn. 417,173
 Scales, grain, C. H. Cooley. 416,714
 Scales, wagon, B. F. Stein. 416,761
 Screen. See Combination screen. Window screen.
 Seat. See Carriage seat. Cart seat. Engineer's seat.
 Secondary battery, C. H. Logan. 417,055
 Seeder, E. C. Tecktonius. 417,115
 Separator, G. A. Barnard. 416,889
 Sewing machine, R. Chandler. 417,146
 Sewing machines, wax thread, Cuming & Peirce, Jr. 417,002
 Sewing machines, cast-off for wax thread, J. H. Jacobs. 416,841
 Sewing machines, spring motor for, D. M. Pfautz. 417,081
 Shade holder, E. W. Rice, Jr. 416,745
 Shades, machine for hemming and sewing fringe to, J. N. Wiggin. 416,892
 Shades to rollers, machine for securing window, J. N. Wiggin. 416,881
 Shears and conveyor, combined, Smith & Pettigrew. 416,961
 Sheller. See Corn sheller.
 Shingle or roofing plate, metal, W. M. Norcross. 416,851
 Shoe stretcher, A. W. Cash. 416,775
 Show case, D. I. Keller. 416,922
 Shutter fastener, J. L. Cherot. 416,992
 Shutter fastener, F. Mesker. 417,064
 Sign, P. Knorpp. 416,925
 Signal. See Railway signal.
 Signal rods, anti-friction guide for, J. T. Hambay. 416,783
 Signaling apparatus, train, S. T. Dutton. 416,777
 Slate cleaner and eraser, H. Rothermel. 416,807
 Slate frames, pencil holder for, J. O. Hebert. 416,728
 Smoke consumer, B. F. Fay. 417,160
 Soap and brush holder, W. P. Stott. 416,967
 Soldering iron heater, G. B. Snow. 417,107
 Spectacles, P. Peck. 417,080
 Speed gauge, O. Braun. 416,896
 Speed regulator, C. S. Tainter. 416,969
 Spirometer, coin-controlled, F. E. Robinson. 416,859
 Spokeshave, L. Camier. 417,144
 Spool holder, S. A. Cooney. 417,151
 Spring. See Doubletree spring. Torsion spring.
 Stamp battery, M. P. Boss. 416,893
 Stand. See Beehive stand. Wash stand.
 Steam engine, J. Cheek. 416,900
 Steam engine, D. Burns. 416,823
 Steam generator, R. Scott. 416,957
 Stereotype plate separating, trimming, and grooving machine, J. R. Cummings. 416,716
 Stirrup, E. M. Turner. 416,765
 Stopper. See Bottle stopper.
 Store or shop fixture, M. H. Wilson. 416,980
 Stove attachment, vapor, J. G. Young, Jr. 417,130
 Stove grate, adjustable, H. W. Bodeman. 417,208
 Stovepipe thimble, J. L. Culberson. 417,154
 Stoves, burner for tops of, W. Vogel. 416,878
 Stoves, cleaning hot blast, F. W. Gordon. 417,019
 Stoves, water heating attachment for gas, J. H. McNutt. 417,197
 Strainer, G. W. Rush. 416,952
 Street receiver, T. Dark. 416,830
 Sugar, refining, F. Bauder. 416,709
 Surf power machine, H. E. Thomas. 416,972
 Switch. See Railway switch. Telephone switch.
 Syringe, E. B. Wilder. 416,977
 Tag and tag fastener, P. Tremouliere. 416,813
 Tank. See Flushing tank.
 Telegraph transmitter, O. D. La Dow. 416,732
 Telephone exchange, house, W. M. Goodridge. 417,018
 Telephone switch, J. Sack. 416,754
 Telephone transmitter, J. C. Eichmeyer. 417,009
 Tenoning machine, W. M. Pearce. 417,200

Thermostat, W. P. Powers. 416,947
 Thermometer, A. P. Trotter. 416,875
 Thill couplings, anti-rattler for, W. P. Tracy. 416,973
 Thill couplings, anti-rattler spring for, W. E. Murbarger. 417,072
 Threshing machine, A. R. Gustafson. 417,175
 Threshing machine straw carrier, R. R. Howell. 416,785
 Ticket holder, J. Gelsenheimer. 417,166
 Torpedo, railway, J. H. Bevington. 417,138
 Torpedoes, firing mechanism for, A. Von Buonacorsi di Pistoja. 417,206
 Torsion spring for vehicles, E. Jarrell. 417,041
 Toy or game, W. P. Lyle. 417,058
 Toys, vehicles, etc., midway for traveling, J. E. Gause. 417,015
 Transom lifter, E. Hippard. 417,182
 Transplanter, Broadhead & Haines. 416,898
 Trap. See Fluid trap.
 Trimmer. See Wall paper trimmer. Wick trimmer.
 Trimming and slitting machine, J. B. Crosby. 416,829
 Trolley holder, W. F. Jenkins. 416,920
 Truck, brake, hand, R. D. Messinger. 416,846
 Truss, J. Perkins. 416,739
 Truss, G. Wilkinson. 416,770
 Tube or pipe machine, J. M. Riley. 416,858
 Tube skelps, machine for scarfing and bending, J. Hooven. 416,731
 Turntable, cable grip, C. Scholz. 417,212
 Turnstile, registering, J. Brady. 417,141
 Tuxer machine, N. Foust. 417,164
 Tuyeres, making, N. Foust. 417,163
 Type distributing machine, R. W. Nelson. 417,074
 Type setting machine, T. J. Lumis. 417,057
 Umbrella holder, G. A. Schoenike. 416,755
 Valve, J. H. Daly. 417,008
 Valve, Pratt & Robison. 416,948
 Valve, balanced slide, E. V. Thomas. 416,812
 Valve operating device for elevators, electro, C. W. Baldwin. 417,132
 Vaporizer, F. C. Hawkes. 416,913
 Vat. See Cheese vat.
 Vehicle, S. P. Burdick. 417,148
 Vehicle running gear, H. M. Oliver. 416,853
 Vehicle standard, S. Graham. 416,910
 Vending machine, J. Corbett. 416,828
 Vending machine, coin controlled, J. Corbett. 416,827
 Vermin exterminator, poultry, E. Roop. 416,951
 Vest adjuster, D. W. Bergey. 416,891
 Violin, E. Gruenberg. 416,726
 Vise, W. G. Sheppard. 416,959
 Wad puller, M. A. Twitcheil. 416,975
 Wagon seat lock, S. R. Lewis. 416,930
 Wall paper trimmer and straight edge, A. J. Gibson. 417,167
 Wash-out closet, porcelain, J. Reid. 416,856
 Wash stand, cabinet, F. H. Hungus. 416,919
 Watch case die, W. H. Fitz Gerald. 416,835
 Watch cases, device for manufacturing, F. Ecaubert. 416,832
 Watch lids, etc., mechanism for the manufacture of, F. Ecaubert. 416,831
 Water wheel, current, R. E. Gray. 417,021
 Weather strip, D. Hartley. 417,178
 Weather strip, M. Howard. 417,184
 Welding machine, electrical pipe or metal, H. E. Fowler. 417,013
 Wheel. See Paddle wheel. Water wheel.
 Whip center, E. Ring. 417,203
 Wick trimmer, S. M. Houck. 417,031
 Winding mechanism, clamp collar for, J. Barrett. 417,133
 Window, Anderson & Huil. 416,772
 Window screen, D. Hartley. 417,179
 Window screen, S. Roebuck. 416,806
 Wine, detecting coloring matter derived from coal tar in, Mathieu & Morfaux. 416,794
 Wire fabric, architectural, C. H. Cooper. 416,826
 Wire rod reeling reel, C. H. Morgan. 416,941
 Wood bending machine, B. Ludwig. 417,056
 Wood polishing machine, Osborn & Richards. 416,801
 Wrench. See Pipe wrench.

DESIGNS.

Bracelet, E. P. Beach. 19,472
 Button, C. D. Stone. 19,481
 Chatelaine bag, J. Henkel. 19,479
 Fence block, wire, Schwartzengraber & Bliss. 19,482
 Memorial cross, P. W. Bailey. 19,471
 Panel, ornamental, A. B. Cameron. 19,473 to 19,478
 Weeding hook, S. Palmer. 19,480

TRADE MARKS.

Blocks, sets or series of picture, P. Cox. 17,255
 Buttons, cuff and collar, F. I. Marcy & Co. 17,268
 Cotton sheetings and shirtings, Jackson Company. 17,251, 17,252, 17,263
 Dyspepsia remedies, H. D. Hughes et al. 17,250
 Food, birds', Snook & Halbe. 17,260
 Grease, lubricating, wool, and other oils, machinery, Columbia Refining Co. 17,248
 Hair tonic, tooth powder, and toilet powder, G. W. Kirk. 17,265
 Leather goods, fancy, V. Le Brun. 17,266
 Medicine for the cure of rheumatism, neuralgia, and like diseases, M. Rennie. 17,272
 Medicine for the removal of the effects of over-indulgence in drink, R. J. Philippi. 17,271
 Oils, lubricating, G. C. Field. 17,249
 Paints ready for use, liquid, A. Stengel. 17,259
 Perfumes, R. W. Gardner. 17,262
 Perfumes, Lehn & Fink. 17,267
 Photographic developing and fixing baths, non-actinic substances for use in, Spiro & Smadbeck. 17,257
 Polish, stove, F. W. Anderson. 17,247
 Polish, stove, W. J. Rigby. 17,256
 Sheetings and shirtings, Jackson Company. 17,264
 Shingles, metallic, National Sheet Metal Roofing Company. 17,254
 Smokers' use, certain named articles for, Langfelder & Hammerschlag. 17,253
 Stoves, furnaces, and their various parts, cooking and heating, Michigan Stove Company. 16,369
 Water wheels and water motors, Pelton Water Wheel Company. 17,270
 Whisky, G. Clark & Co. 17,261
 Whisky, Stoll, Vannatta & Co. 17,258

A Printed copy of the specification and drawing of any patent in the foregoing list will be furnished from this office for 25 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway, New York.

Canadian Patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of \$40 each. If complicated, the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
 Back Page, each insertion - - - \$1.00 a line.
 The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

USE ADAMANT WALL PLASTER

It is Hard, Dense, and Adhesive. Does not check or crack. It is impervious to wind, water, and disease germs. It dries in a few hours. It can be applied in any kind of weather. It is in general use. Licenses granted for the mixing, using, and selling. Address ADAMANT MFG. CO., 71 E. Genesee Street, Syracuse, N. Y.

Seneca Falls Mfg. Co., 695 Water St., Seneca Falls, N. Y.

SEBASTIAN, MAY & CO'S
 Improved Screw Cutting
 Foot & LATHES
 Power
 Drill Presses, Chucks, Drills, Dogs, and machinists' and amateurs' outfits. Lathes on trial. Catalogues mailed on application. 165 W. 2d St., Cincinnati, O.

ENTERING
 TEACH
 EARN
 MONEY
 IMPROVED LIME LIGHT
 SETS OF OIL & MAGIC
 VIEWS WITH LANTERNS
 PRINTED & LECTURED BY
 J. B. COLT & CO.
 16 BECKMAN ST. NEW YORK.

SPECIAL NOTICE!
 We have just issued a Catalogue and Price List of Mining, Tunneling, and Quarrying Machinery. This catalogue will be mailed free to contractors, engineers, and to any one engaged or interested in rock excavation or compressed air. To all other persons it will be sent on receipt of 50 cents in postage stamps.
 INGERSOLL-SERGEANT ROCK DRILL CO., 10 Park Place, New York.

DOES YOUR PATENT PAY?
 If not, you should send for circular of book "How to Make a Patent Pay," by a successful inventor. Treats on how to invent, how to interest capital, how to estimate the value of a patent, how to sell patents, on forming companies, forms for licenses, etc. Price \$1.
 J. F. DAVISON & CO., 120 Broadway, N. Y.

\$3 PRINTING PRESS
 For cards, labels, etc. Circular press, \$8. Size for small newspapers, \$44. Rotary jobber, \$213, \$100. Do all your own printing and advertising. Full printed rules for type-setting, etc. Send 2 stamps for catalogue of presses, type, cards, etc., to factory. KELSEY & CO., Meriden, Conn.

SETS OF CASTINGS OF
 MODEL ENGINES
 CATALOGUES
 FREE.
 ALSO TOOLS,
 GEAR WHEELS & PARTS OF MODELS
 GOODNOW & WIGHTMAN

STEEL TYPE FOR TYPEWRITERS,
 Stencils, Steel Stamps, Rubber and Metal Type Wheels.
 New York Stencil Works, Mfrs.
 100 Nassau Street, New York.

VELOCITY OF ICE BOATS. A COLLECTION
 of interesting letters to the editor of the SCIENTIFIC AMERICAN on the question of the speed of ice boats, demonstrating how and why it is that these craft sail faster than the wind which propels them. Illustrated with 10 explanatory diagrams. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 214. Price 10 cents. To be had at this office and from all newsdealers.

ASBESTOS
 MINERS & MANUFACTURERS.
 THE ASBESTOS PACKING CO.
 159 CONGRESS ST. BOSTON

CABINET WOODS
 and VENEERS,
 FRET SAW or BRACKET WOODS,
 PLANE READY FOR USE
 Send stamp for catalogue.
 HENRY T. BARTLETT, 200 LEWIS STREET, NEW YORK.

TOOL AGENTS WANTED
 in every SHOP in the United States.
 Send 10c for catalogue. Stationery &c.
 THE FINEST OF MECHANICAL TOOLS A SPECIALTY.
 C. B. JAMES, 93 LAKE ST. CHICAGO.

PRESSES. 50 TO 500 TONS,
 by Hand or Power.
 For almost every purpose requiring pressure.
 BOOMER & BOSCHERT PRESS CO.
 Send for Catalogue. 155 West Water Street, Syracuse, N. Y., U. S. A.

Extralite, explosive..... 28
Eyepiece, automatic..... 28

F Fair, American Institute..... 136 Falls, Bridal Veil..... 313 Falls, Niagaran..... 382 Falls, Niagara, utilizing..... 370 Farms, vacant, Vermont..... 261 Farming, frog..... 400 Fashions, Charles..... 38 Feed water heater..... 384 Fence, Barton's..... 38 Fence, Macrea's..... 372 Fender for car windows..... 45 Fertilizer, distributor..... 370 Fever, typhoid..... 185 Figures, wax, how made..... 400 Fever, yellow, germ of..... 380 Film, transparent, new..... 7 Finish, dead, simple..... 246 Fish, green..... 261 Fish, green, burning of..... 196 Fish, stronger than oak..... 85 Fish, escape, Lennier's..... 308 Fish, escape, unflamable..... 150 Fire escape, Mitchell's..... 162 Fire extinguisher, Mitchell's..... 33 Fireproofing, Mitchell's..... 306 Fire, railroad, singular..... 178 Fire, what is a..... 24 Fires at Lynn and Boston..... 353 Fires, yellow, against..... 38 Fish, blind..... 51 Fish, ice, dangerous..... 250 Fish, poison, Indian Ocean..... 406 Fishing with electric light..... 198 Fishes, speed of..... 201 Fishes, radiating power..... 104 Fleet, merchant, plea for..... 380 Floor beam connection..... 98 Floor, good, to make..... 9 Floor, Jack, Dix's..... 258 Floors, how to lay..... 65 Flour moth..... 392 Flour production, facts about..... 310 Flour, water, plea for..... 296 Flowers, blue, fading of..... 70 Flume, San Diego..... 70 Fluorite..... 58 Food products, investment..... 296 Food products, palace of..... 102 Foods, germs in..... 228 Foot rest for ratators..... 369 Forbes, Capt. R. B..... 359 Forest, giants of the..... 359 Fossils in Oregon..... 309 Fountains, luminous..... 376 Fountains, luminous, table..... 246 Freeman, Stephen..... 387 Frog farming..... 144 Frisbie, D..... 38 Frog, nest building..... 38 Frog, replacing..... 226 Fruit candying industry..... 88 Fruit drying..... 232 Fruit picker, Brazee's..... 138 Fuel gas generator..... 138 Fuel, power, utilization..... 380 Furnace for poor fuel..... 390 Furnace hearth..... 196	H Hot Water Co., Boston..... 387 House, dwelling, cheap..... 389 House, large at West..... 245 House, as playground..... 249 Hudson River illuminated..... 261 Hydrogen, peroxide..... 261 Hypnotic, a new..... 196 Hypodermic method..... 268 Hymenomyces, species of..... 56	I Ice, contraction of..... 4 Ice machine, Dermi ny's..... 339 Ice in the sickroom..... 401 Influenza, epidemic..... 179 Ice water, is it healthy?..... 65 Illusion, optical..... 338 Image, Nampa..... 292 India rubber..... 179 India rubber in carriage..... 262 Invention machine..... 150 Ink eraser, Johnston's..... 150 Ink stains..... 118 Ink, typewriter..... 293 Ink for writing on photos..... 165 Insanity, causes of..... 181 Insects, heat developed by..... 201 Insects, vision in..... 56 Institute, Pratt..... 401 Invention, gas, new..... 373 Invention, progress of..... 310 Invention wanted..... 304 Inventors and capitalists..... 321 Inventions, Chinese..... 32 Inventions, retarding..... 3 Inventions recently started..... 10 26, 42, 58, 73, 90, 106, 122, 138, 154, 170, 186, 202, 218, 234, 250, 266, 282, 297, 314, 330, 345, 360, 376, 392, 408 Inventions and wages..... 408 Iron, chrome, in Pacific..... 85 Iron, corrosion of..... 232 Iron, crude into steel..... 189 Iron ore, Pilot Knob..... 189 Iron pipes, rusting of..... 187 Iron, silencing..... 17 Iron and steel, Institute..... 245 Irrigation in California..... 259	J Jack, coupling, thill..... 114 Jack, floor, Dix's..... 258 Jack, lifting, Smith's..... 372 Jack, in China..... 341 Jaw, necrosis of..... 291 Jetty work, Columbia River..... 83 Joint-making material, new..... 96 Joule, James P..... 288, 321 Jupiter, occultation of..... 277 Jupiter, scenes on..... 296	K Key-hole guard..... 196 Kidney disease, coffee in..... 48 Kins, bricks..... 275 Knife, pocket, Brede's..... 284 Knowledge, working for..... 64	L Laborers, German, care of..... 312 Laborer's laws, new..... 66 Lacing, belt, Bristol..... 117 Lacquer, Japanese..... 343 Ladder, Jacob's..... 227 Lake Shore drive..... 20 Lamp, arc, new..... 164 Lamp, incandescent, patent..... 240 Lamp, bracket, piano..... 169 Lamp, car, electric..... 274 Lamp, Edison..... 274 Lamp, electric, hanger for..... 291 Lamp extinguisher, Miller's..... 291 Lamp extinguisher, Palge's..... 300 Lamp, incandescent, patent..... 240 Lamp lighter, clockwork..... 308 Lamp, semi-incandescent..... 197 Lamps, petroleum management..... 278 Language, Spanish..... 305 Lantern, scientific..... 115 Lath attachment, Coie's..... 354 Lath, dog, England's..... 352 Lath, Fox, French..... 282 Lathes, French, English and American..... 3 Launch, naphtha..... 358 Law, contract, foreign..... 229 Law, foreign contract, a nullity..... 329 Laws, labor, new..... 66 Leaf printing..... 238 League, Scripps, in England..... 145 Leather stretching machine..... 6 Leaves, oak, shape of..... 264 Left leggedness..... 264 Leg, artificial..... 179 Lens, cultivation, Sicily..... 114 Lens, photographic..... 201 Lepidoptera, bleaching..... 56 Leverrier, statue of..... 100 Life, animal, increase of..... 312 Life insurance..... 167 Light, loss, in windows..... 84 Light, penetration in water..... 246 Light, phenomenon of..... 96 Light, search, experiment..... 96 Light in the sick room..... 145 Lith houses, American..... 369 Lighting, incandescent..... 274 Lighting, flashes, photos..... 113 Lightning, protection from..... 131 Limited, word, meaning of..... 53 Line, American, to Europe..... 48 Lineman, danger to..... 34 Linen's shall we make..... 25 Liver disease, coffee in..... 384 Liver, distal cyst of..... 384 Lock, Douglas's..... 389 Lock joint for beams..... 178 Lock, Neubrand's..... 178 Lock, railway switch..... 168 Locomotive, bicycle..... 150 Locomotive exhibits, Paris..... 380 Locomotive, hot water..... 39 Locomotive struck by lightning..... 23 Locomotives, Baldwin..... 243 Locomotives, ten-wheeled..... 307 Looms, Elias..... 146 Looms and cards, woolen..... 22 Lumber center, a great..... 111 Lumber machinery..... 260 Lumber raft, ocean..... 355 Lumbering enterprise, new..... 216 Lung troubles, relief for..... 101	M Machinery, labor-saving..... 233 Machine tool exhibits..... 183 Magdalen..... 25 Magnesium..... 115 Mahogany, Mexican..... 167 Maine, cruiser..... 212 Man, origin of..... 201 Manometer, tele..... 388 Map of the Americas..... 388 Marine conference, international..... 27 Marriages, consanguineous..... 6	N Matches, parlor (1280)..... 187 Matches, safety (1284)..... 187 Materials, raw..... 189 Mathematician, negro..... 384 Meat-carrying apparatus..... 275 Mechanic, the coming..... 386 Mechanical progress..... 281 Medicine men, Indian..... 228 Mendelhall, Prof. T. C..... 196 Metals, tensile tests..... 323 Metric system progress of..... 71 Mexico, trade of, progress..... 240 Mica..... 235 Mincement, Virginia..... 377 Microscope for lantern..... 312 Microscope objective..... 116 Miles, 85 in 82 minutes..... 24 Milk and its products..... 24 Milky way, visitors from..... 335 Mill, planing, building..... 113 Mills, why some fail..... 311 Mineralogical notes..... 56 Mining, coal, Cape Breton..... 49 Mines of Bolivia..... 359 Mines, nickel and copper..... 208 Mines, salt, Retsof..... 771 Mirror, astronomical..... 147 Missionary, American..... 194 Mississippi River, improvements..... 38 Mitchell, Maria..... 401 Mixer, Broughton..... 339 Moon, temp. in sunshine..... 405 Molecular actions..... 380 Moles, removal of..... 370 Monument, Indiana..... 32 Monocle for lantern..... 115 Morphia fields..... 65 Mortgage, machinery, etc..... 136 Mosaic work, Florentine..... 388 Mosquitoes, to expel..... 149 Mosquitoes, getting rid of..... 136 Moth, flour..... 392 Motor, capacity of the..... 232 Motor, steam, Straub's..... 232 Motor, water, Besemer's..... 258 Mould, brick, Paul's..... 354 Mount Stephen..... 215 Movement, mechanical..... 407 Movements, rapid by of..... 407 Mud, bottle, new..... 6 Museum, Boulak..... 105 Music, evolution of..... 197 Music leaf turner..... 179 Music, registering by phonog..... 230 Mussel poisoning..... 145	O Oak leaves, shape of..... 294 Oaks, good, how to tell..... 260 Objectives, microscope..... 373 Objects, natural, preservation..... 373 Obelisk, Central Park..... 352 Occult, trip, shortening..... 245 Okonite Co. medal..... 245 Oil, can, Rau's..... 163 Oil cloth, sticking together..... 363 Oil well, the original..... 309 Oil, spring cover..... 5 Opel..... 123 Paper, porcelain, Georgia..... 168 Ore, iron, Pilot Knob..... 189 Ore separator, Thomas..... 355 Organ, a great..... 389 Organ, pallet, Girardin's..... 389 Overstrain, mental and musical..... 88 Oyster pail, new..... 20	P Packing, piston rod..... 114 Paddle wheel, improved..... 242 Pail, oyster, new..... 20 Paint, how to remove..... 277 Paint, removing..... 80 Paintings, water color, fading..... 401 Palace of food products..... 102 Palms, uses of..... 38 Paper, patent..... 36 Paper, porcelain, Georgia..... 168 Paper, rail, protector for..... 182 Paris exhibition..... 3, 17, 40, 52, 57 68, 69, 83, 97, 102, 113, 137, 153 169, 182, 193, 227, 241, 262, 277, 279 325, 328, 376 Pasteur's method, criticism of..... 105 Pasteur's remedy for rabies..... 102 Pasteur's system, success..... 50 Patent, bought by English..... 50 Patent, cases important..... 101 Patent, incandescent lamp..... 240 Patent office examiners..... 355 Patent office report..... 183 Patents..... 120 Patent, Edison's..... 165 Patents in Great Britain..... 48 Peanuts..... 72 Penholder, Egan's..... 179 Pendant, watch case..... 307 Periodicals, value of..... 197 Peru, damage by water in..... 209 Peters, Norris..... 146 Phasot, Mongolian..... 273 Philadelphia, cruiser..... 385, 164 Photograph 200 years ago..... 229 Photograph, improved..... 224 Photograph, listening to..... 231 Photograph not yet ready..... 256 Photograph and photograph..... 133 Photograph, possibilities of..... 306 Photograph and the press..... 166 Phosphorus..... 133 Photographic convention..... 184 Photographic notes..... 7, 165, 216, 363 Photographing on linen..... 216 Photography, amateur..... 372 Photography, new use..... 21 Phthisis, carbonic acid in..... 226 Physician, practical..... 17	Q Quinine, Chinese..... 133, 181 Rabies, Pasteur's remedy for..... 102 Racing Atlantic..... 230 Radiators, foot rest for..... 18 Raft, lumber, ocean..... 355 Railroad construction in 1888..... 330 Railroad fire, singular..... 178 Railroad, Guatemala, sale of..... 328 Railroad, Housatonic, accident..... 24 Railroad, Long Island, shops..... 183 Railroad statistics..... 147 Railroads, city, power for..... 39 Railroads, United States..... 249 Rails, manufacture of..... 23 Railway, Andean..... 23 Railway car, Treanor's..... 195 Railway, Chinese, new..... 363 Railway, electric, mountain..... 224 Railway, elevated, wages on..... 17 Railway, London and N. Western..... 240 Railway master mechanics..... 116 Railway, Mount Pilatus..... 319 Railway, second, veteran of..... 149 Railway shop notes..... 148 Railway, ship, new design..... 306 Railway, street, Girard's..... 327 Railway speed, high..... 116 Railway from St. Petersburg..... 18 Railway, transatlantic..... 213 Railways, electric..... 154 Railways, elevated, New York..... 8 Railways increase trade..... 354 Rain water, nitrates in..... 35 Raisin industry, California..... 241 Rattlesnake, double fanged, 7, 57, 133 Razor strap, Ray's..... 123 Refrigerator, Hill's..... 307 Reliefs, photo, decorative..... 292 Remedy, for an English..... 386 Reservoir, gigantic..... 183 Reservoir, Sodom..... 108 Reservoir, New York, new..... 97 Respirometer, Tata's..... 131 Resistance, column..... 163 Resistance, measurement..... 249 Retort, about an English..... 363 Rheumatism, acute, theory of..... 26 Rheumatism, skin for..... 182 Rhubarb wine (1852)..... 219 Rich..... 366 Rifle, Remington-Lee..... 211 Rifle, magazine, Russian..... 401 River, subterranean, French..... 322 Rolls, large..... 322 Rome, ancient..... 87 Roofing tank apparatus..... 162 Rope transmission..... 357 Rope, wet, strength of..... 182 Run, bay (1020)..... 113 Rush goods, Chinese..... 144 Rust of stacks, prevention..... 32 Rust stains..... 117 Rutherford, Lewis M..... 375	R Rabbit drive, California..... 295 Rabbit grub..... 133, 181 Rabies, Pasteur's remedy for..... 102 Racing Atlantic..... 230 Radiators, foot rest for..... 18 Raft, lumber, ocean..... 355 Railroad construction in 1888..... 330 Railroad fire, singular..... 178 Railroad, Guatemala, sale of..... 328 Railroad, Housatonic, accident..... 24 Railroad, Long Island, shops..... 183 Railroad statistics..... 147 Railroads, city, power for..... 39 Railroads, United States..... 249 Rails, manufacture of..... 23 Railway, Andean..... 23 Railway car, Treanor's..... 195 Railway, Chinese, new..... 363 Railway, electric, mountain..... 224 Railway, elevated, wages on..... 17 Railway, London and N. Western..... 240 Railway master mechanics..... 116 Railway, Mount Pilatus..... 319 Railway, second, veteran of..... 149 Railway shop notes..... 148 Railway, ship, new design..... 306 Railway, street, Girard's..... 327 Railway speed, high..... 116 Railway from St. Petersburg..... 18 Railway, transatlantic..... 213 Railways, electric..... 154 Railways, elevated, New York..... 8 Railways increase trade..... 354 Rain water, nitrates in..... 35 Raisin industry, California..... 241 Rattlesnake, double fanged, 7, 57, 133 Razor strap, Ray's..... 123 Refrigerator, Hill's..... 307 Reliefs, photo, decorative..... 292 Remedy, for an English..... 386 Reservoir, gigantic..... 183 Reservoir, Sodom..... 108 Reservoir, New York, new..... 97 Respirometer, Tata's..... 131 Resistance, column..... 163 Resistance, measurement..... 249 Retort, about an English..... 363 Rheumatism, acute, theory of..... 26 Rheumatism, skin for..... 182 Rhubarb wine (1852)..... 219 Rich..... 366 Rifle, Remington-Lee..... 211 Rifle, magazine, Russian..... 401 River, subterranean, French..... 322 Rolls, large..... 322 Rome, ancient..... 87 Roofing tank apparatus..... 162 Rope transmission..... 357 Rope, wet, strength of..... 182 Run, bay (1020)..... 113 Rush goods, Chinese..... 144 Rust of stacks, prevention..... 32 Rust stains..... 117 Rutherford, Lewis M..... 375	S Saccharin..... 25, 135, 352 Salt mines, Retsof..... 771 Sandin device, car..... 370 Sandpapering machine..... 322 Sash holder, new..... 118 Savings the foundation of wealth..... 238 Saw, drag, improved..... 230 Sawdust..... 197 Sawing machine, De Graff's..... 230 Scaffold standard..... 291 Schools, technical, French..... 83 Sci. Am. publs., rates..... 401 Science, daily developments..... 246 Science, experimental..... 273 Science, pudding..... 388 Scientific American, Spanish..... 368 Scissors attachment..... 226 Scrap heap, incident from..... 276 Screen, window..... 387 Screw driver and wrench..... 375 Screw driver, Turner's..... 373 Screw threading die..... 104 Sea waves, height of..... 245 Seasickness, relief of..... 245 Seattle, burning of..... 3 Seed drill, Genung's..... 370 Seed planter, improved..... 37 Seeds, color of..... 392 Seeds, pressure of..... 201 Senses other than ours..... 244 Separator, ore..... 35	S Settlement, Norwegian, Mas..... 340 Sewage disposal problem..... 145 Sewage purification process..... 145 Sewage schemes..... 323 Sewage treatment..... 261 Seychelles Islands..... 200, 416 Sewing machine..... 47 Seymour, Fred. J..... 48, 116 Ships in Adriatic..... 129 Shield for firemen..... 307 Ship, air, Campbell..... 347 Ship builders, home for..... 257 Ship canal, Manchester..... 237 Ship of war Blake..... 388 Ship railway, new design for..... 305 Ship, torpedo, countermining..... 135 Ship, war, new type..... 357 Ship, war, sunken..... 308 Ships, loading, Buffalo..... 264 Ships, passenger, Atlantic..... 359 Ships, war, electricity on..... 129 Ships of war, great..... 119 Ships of water, obsolete..... 129 Shirts, cuffs, and collars..... 129 Shoe contract system..... 246 Shoe heel..... 307 Shoemaking, essay on..... 213 Shutter operator, Jorres..... 86 Siberia, heat of..... 135 Sick room, light in..... 145 Sieve for crushing machine..... 210 Sifter, ash, Crosby's..... 210 Sifter, ash, Love's..... 217 Signal, new, trial of..... 147 Signal service station, New York..... 7 Signal, intercepting..... 402 Signal, railway, electric..... 101 Silk, artificial..... 101 Sill plate for cars..... 194 Silver for 1888..... 88 Siphon, Meyer's..... 131 Sleds, propelling..... 132 Small sense of in horse..... 132 Smoke consumer, Force's..... 195 Smoke nuisance..... 209, 344 Snake, hoop..... 114 Snake, horn, myth..... 114 Snake, joint..... 307 Soapstone..... 264 Solder, tenacious..... 227 Sorghum sugar..... 53 Sound, transmits in water..... 357 South, progress in the..... 265 Spark conductor, Brandt's..... 32 Spectacle lenses..... 250 Spectroscope without lens..... 250 Sphinx, mountain..... 406 Spider, poisonous..... 217 Spider, red..... 210 Spider web making..... 180 Spiders, immense..... 38 Spiders, maternal instinct..... 232 Spindle wharve..... 242 Spokane, the lesson of..... 134 Springs, carriage..... 228 Squadron, British, speed trials..... 96 Stacks, smoke, rusting of..... 32 Stain, cherry (1854)..... 154 Stain, ink and rust..... 18 Stair climber, Amiot's..... 386 Stamp mill, Krause's..... 323 Stanley, H. M..... 391 Stanley, latest discoveries of..... 336 Stanley, record of..... 369 Star, history of a..... 356 Stars and sun, motion in..... 48 Starboard the helm, term..... 357 Starch, cassava..... 7 States, American, congress..... 225 Statue, Leverrier's..... 100 Steam carriage..... 49 Steam engine governor..... 194 Steam line to Europe..... 112 Steam navigation, ocean..... 112 Steam pipes, loss of heat..... 41 Steam pines..... 200 Steamboat, the first..... 120 Steam boiler, Davidson's..... 178 Steamer Charleston, trial..... 199 Steamer City of Paris..... 314 Steamer lines, English..... 114 Steamer, great..... 89 Steamer, the oldest..... 135 Steamer, Tautonic..... 117 Steamer, thirty-five knot..... 401 Steel, use of nickel with..... 404 Steel, how to treat..... 182 Strip, safety..... 182 Stone drill, Ingersoll..... 38 Stone moving, Buenos Ayres..... 380 Stones, precious, artificial..... 321 Stones, rolling, Nevada..... 360 Stromapron..... 177 Stove polish (85)..... 10 Stove trade..... 70 Straw vs. twine..... 354 Streams, running, utilization..... 97 Streets, London..... 344 Subway explosions..... 300 Success, how to gain..... 158 Success, methods of..... 230 Sugar, beet, California..... 229, 309 Sugar, beet, progress..... 169 Sugar in boiler incrustation..... 165 Sugar industries, American..... 53, 157 Sugar, recovery of..... 157 Sun dials, portable..... 197 Sun, eclipse of..... 216 Sunfish, fecundity of..... 307 Sun and stars, motion of..... 132 Swift, W. F..... 17 Swing, child's, McCord's..... 25 Switch lock, railway..... 263 Switch, railroad, Wolfe's..... 158 Synchronism, visual in telegraph..... 339, 406	T Tachyscope, electric..... 303 Tailors, English and American..... 119 Tallow, bleaching..... 182 Taylor, William..... 89 Teachers, shipload of..... 117 Teachers, training of..... 117 Technician, Verein..... 38 Teeth, filling..... 403 Teeth, care of..... 356 Telegraph, discoverer of..... 356 Telegraph, rapid, new sys..... 339, 406 Telemeter system..... 63 Telephone Association..... 224 Telephone exchange plants..... 34 Telephone a simple..... 18 Telephone tickets..... 18 Telephone, Zigzag..... 132 Telephones in Austria..... 276 Telephones, French, seizure..... 209 Telescope, photographic, great..... 71 Tempering bath, great..... 306 Tension, low, more copper..... 306 Teutonic steamer..... 89, 117 Textiles, incombustible..... 165 Thermometer, clinical..... 4 Thermometer, metallic..... 340 Thermometer, tele..... 38 The mostat..... 380 Thill coupling, Barr's..... 114 Thill coupling, Lee's..... 5 Things to know, good..... 5 Throat, sore, canal..... 225 Thunderbolt, sarcastic..... 81 Ticker case, Hart's..... 370 Tiger, man-eating..... 380 Tigris, man-eating..... 151	U Umbrella stand, Hai ht's..... 498 United States, progress of..... 156 University, Clark..... 229 Uranium..... 243 Uranium in Cornwall..... 401 Useful, if true..... 114 Utah hotter than Siberia..... 101	V Vacuum apparatus, mouth..... 264 Valve head, Moore's..... 178 Valve for steam engines..... 50 Varnish for harness..... 312 Varnish, negative, black..... 9 Vart in Berlin Garden..... 48 Vegetables, medicinal properties..... 9 Vehicle, two-wheeled..... 179 Vehicles, draught of..... 35 Velocipedists, military..... 443 Ventilator, window..... 147 Vermen, removal from plants..... 275 Vertebrates, origin of..... 49 Vibration in buildings..... 313 Vibrations, stopping..... 373 Vine and olive in Algeria..... 212 Vinegar, toilet (1172)..... 107 Violin tail piece..... 338 Viper bite, treatment of..... 248 Volcanic erupt in Turkey..... 214	W Wages, continental..... 167 Wages, inventions and..... 261 Wall paper protector..... 72 War dances, Indian..... 383 War ship Blake..... 383 War ship, new type..... 257 War ship, sunken, discovery..... 306 War ships, great..... 128 War ships, obsolete, more..... 119 Warnerke's process..... 246 Washboard protector..... 201 Washing machine, Johnson's..... 354 Wasp, spider-hunting..... 161 Straw vs. twine..... 354 Water, damage by in Peru..... 209 Water, Florida (111)..... 27 Water, how and when to drink..... 106 Water, ice, is it healthy?..... 4 Water, inextinguishable..... 4 Water, large head of..... 18 Water motor, Besemer's..... 256 Water power, high pressure..... 220 Water, rain, nitrates in..... 64 Water, refuse, purification..... 228 Water for protection..... 228 Water spout, close view of..... 308 Water supply of New York..... 2, 64, 97 Water supply, New York, purity..... 306 Water wheel, Adams..... 213 Water works, Chicago..... 307 Wave power, utilizing..... 135 Waves, great, height of..... 104 Waves, sea, height of..... 401 Wax figures, how made..... 404 Wax portraits, Egyptian..... 80 Wealth, foundation of..... 232 Weapon, a terrible..... 146 Weeds, weight of the..... 201 Wells, artesian, Iowa..... 19, 197 Wells, artesian, Memphis..... 116 Wells, oil, temperature..... 392 Whale, cable broken by..... 386 Whale, weight of the..... 201 Whales becoming plentiful..... 236 Wharve, spindle..... 242 Wheel, gear, worn..... 22 Wheel, paddle, improved..... 242 Wheel, water, Adams..... 213 Wheels, car, boring..... 342 Why it is..... 383 Wind, some curious..... 178 Wind pressure..... 39 Window sash, swinging..... 226 Window screen, Graves'..... 387 Window ventilator..... 147 Windows, dark room..... 216 Wine, rhubarb (1852)..... 212 Wines, coloring matters in..... 146 Wire screw machine..... 4 Wood carvings, imitation..... 85 Woodcock, the..... 198 Wood, polishing..... 274 Wood working machinery..... 97 Wood raising in the U. S..... 275 Woolen looms and cards..... 22 Workmen, American, in Paris..... 216 Workmen, American..... 26 World newspaper building..... 240 Worsteds and woolsens..... 2	Y Yorktown, cruiser..... 386
---	--	--	---	--	--	--	---	--	--	---	---	---	---	--	---	---	--	--

Carey, 1785.

IRD & CO.
Sole and Importers,
Phila. Pa., U. S. A.
Catalogue of Practical and
and our other Catalogues
covering every branch of Sci-
entific and mechanical inven-
tion sent free and free of postage
to the world who will furnish his

Established by EDWARD L. YOUNG.

The Popular Science Monthly.

Edited by WM. J. YOUNG.

SCIENCE is rapidly coming to be the controlling force
in every field of human activity.

It has developed the clumsy dug-out into the swift
ocean steamer, and the slow-going cart into the flying
railway-train.

Without it the industrial worker was a hopeless
drudge; the growth of its applications has multiplied
his comforts and increased his leisure.

Without it the race was powerless in the presence of
disease; with its help epidemics are disappearing, and
better health with longer life are secured.

Without it education was an unvarying routine of
mechanical repetitions; upon it has arisen an art adapted
to the needs of individual minds and to the conditions
of modern life.

Similarly, in every department of human activity it is
the great agency of improvement. In its steady pro-
gress it touches everywhere and affects everybody. It
gives law to the material interests of the community,
and powerfully influences the ideas, opinions, and be-
liefs of men, so that all have an interest in being in-
formed of its advancement.

THE POPULAR SCIENCE MONTHLY is devoted to sup-
plying this knowledge in a form that can be easily un-
derstood, and for nearly twenty years has maintained a leading
position among scientific journals.

With other illustrations, each number contains a finely
engraved PORTRAIT of some eminent man of sci-
ence, with a BIOGRAPHICAL SKETCH.

The managers of THE POPULAR SCIENCE MONTHLY
accept the steadily growing circulation of the magazine,
and the large influence it has gained among the more
thoughtful and liberal-minded readers in America, as
the highest testimonial of approval of its past course.
Increasing attention will be given to the discussion of
economic subjects and other leading scientific questions
of the day. During the coming year the magazine will
contain a series of papers from distinguished specialists
on the agency of science in the growth of the leading
industries of the world since the discovery of America
by Columbus.

NEW YORK: D. APPLETON & COMPANY, 1, 3, and
5 BOND STREET.
Single Number, 50 cents. Yearly Subscription, \$5.00.

After Being on the Market Four Years
The "ACME" Still Leads.

Sizes One, Two, Three, and
Four Horse Power. Arranged
for either NATURAL GAS or
Kerosene Oil fire, as ordered.
No extra insurance required on
account of the oil fire. Send for
catalogue giving full particu-
lars and prices.

**ROCHESTER MACHINE TOOL
WORKS, ROCHESTER, N. Y.**



THE MODERN ICE YACHT. — BY
Geo. W. Polk. A new and valuable paper, containing
full practical directions and specifications for the con-
struction of the fastest and best kinds of Ice Yachts of
the latest, most approved forms. Illustrated with en-
gravings drawn to scale, showing the form, position,
and arrangement of all the parts. Contained in SCIENTIFIC
AMERICAN SUPPLEMENT, No. 624. Price 10
cents. To be had at this office and of all newsdealers.


FILE DRIVING MACHINERY!
Catalogue, Vulcan Iron Works, 80 N. Clinton St., Chicago.



HARRISON CONVEYOR!

For Handling Grain, Coal, Sand, Clay, Tan Bark, Cinders, Ores, Seeds, &c.
Send for Circulars. **BORDEN, SELLECK & CO.,** Sole Manufacturers, Chicago, Ill.

PULLEYS, HANGERS, FRICTION CLUTCHES. **PROGRESS MACHINE WORKS,**
A. & F. BROWN, 44 Park Place, N. Y.



Lightning Well-Sinking Machinery.
Makers of Hydraulic, Jetting, Revolv-
ing, Artesian, Mining, Diamond Tools,
Wells and Prospecting, Engines, Boilers,
Wind Mills, Pumps, etc. SOLD ON
TRIAL. An ENCLOSURE of
1,000 Engravings, Earth Stratifica-
tion, Determination of Minerals
and Quality of Water.
Gives Light, Finds Gold.
Wanted for 25 cts.
Gas Book 25 cts.
The American
Well Works,
AURORA, ILLS.

ICE-HOUSE AND REFRIGERATOR.
Directions and Dimensions for construction, with one
illustration of cold house for preserving fruit from
season to season. The air is kept dry and pure through-
out the year at a temperature of from 34° to 36°. Con-
tained in SCIENTIFIC AMERICAN SUPPLEMENT No. 116.
Price 10 cents. To be had at this office and of all news-
dealers.

OIL WELL SUPPLY CO. Ltd.

91 & 92 WATER STREET,
Pittsburgh, Pa.,
Manufacturers of everything needed for
ARTESIAN WELLS
for either Gas, Oil, Water, or Mineral
Tests, Boilers, Engines, Pipe,
Cordage, Drilling Tools, etc.
Illustrated catalogue, price
lists and discount sheets
on request.

THE PHONOGRAPH.—A DETAILED
description of the new and improved form of the pho-
nograph just brought out by Edison. With 8 engrav-
ings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT,
No. 632. Price 10 cents. To be had at this
office and from all newsdealers.



ARTESIAN

Wells, Oil and Gas Wells, drilled
by contract to any depth, from 5
to 300 feet. We also manufacture
and furnish everything required
to drill and complete same. Port-
able Horse Power and Mounted
Steam Drilling Machines for 100 to
400 ft. Send 10 cents for illustrated
catalogue. Pierce Artesian
and Oil Well Supply Co.,
80 Beaver Street, New York.

MAGIC LANTERNS and STEREOPTICONS for
Public Exhibitions and for
Home Amusement. Views
illustrating every subject. A
very profitable business for a
man with small capital. Best apparatus, new views, largest
stock. 25 years practical experience. 170-p. catalogue free.
GEO. H. PIERCE, 140 S. 11th St., Philadelphia, Pa.

Themost successful Lubricator
for Loose Pulleys in use.
**VAN DUZEN'S PATENT
LOOSE PULLEY OILER**
Highly recommended by those who
have used them for the past two
years. Price very reasonable. Every
user of machinery should have our
"Loose Pulley Oiler" sent free.
VAN DUZEN & TIFT, Cincinnati, O.

WORKING MACHINERY INVENTIONS DEVELOPED. Send for Model Circular. Jones Bros. E. Co., Cin. O.

ICE-HOUSE AND COLD ROOM. — BY R.
G. Hatfield. With directions for construction. Four
engravings. Contained in SCIENTIFIC AMERICAN SUP-
PLEMENT, 59. Price 10 cents. To be had at this office
and of all newsdealers.

ROCK DRILLS
AIR COMPRESSORS &
GENERAL MACHINERY
MINING, TUNNELING,
QUARRY & RAILROAD WORK.
RAND DRILL CO. 23 PARK PLACE NEW YORK.

CLARK'S ALL TRUCK WHEELS
AND CASTERS.
Noiseless Rubber-Tired Truck Wheels
AND CASTERS,
that save all wearing of floors.
Also, COMPLETE TRUCKS.
Catalogue free.
GEO. P. CLARK,
Box 14, Windsor Locks, Conn.

THE KODAK

Embodies the only system of continuous film photo-
graphy. World-wide success.

"You press the button. We do the rest."

Or you can do it yourself.

THE EASTMAN DRY PLATE AND FILM CO.

Price \$25, loaded for 100 pictures. Reloading \$2.
Send for Kodak Primer, free. ROCHESTER, N. Y.

COMPLETE STEAM PUMP
ONLY SEVEN DOLLARS
DEMAND THIS PUMP
OF YOUR DEALER OR WRITE
TO US FOR PRICES.
VANDUZEN'S PATENT
VANDUZEN & TIFT.
SOLE MAKERS
CINCINNATI, O.

PERFECT NEWSPAPER FILE

The Koch Patent File, for preserving newspapers, Mag-
azines, and pamphlets, has been recently improved and
price reduced. Subscribers to the SCIENTIFIC AMERICAN
and SCIENTIFIC AMERICAN SUPPLEMENT can be
supplied for the low price of \$1.50 by mail, or \$1.25 at the
office of this paper. Heavy board sides; inscription
"SCIENTIFIC AMERICAN" in gilt. Necessary for
every one who wishes to preserve the paper. Address
MUNN & CO., Publishers SCIENTIFIC AMERICAN.

DEAFNESS & HEAR NOISES CURED BY
Peck's INVISIBLE TUBULAR EAR
CUSHIONS. Whispers heard, Com-
fortable. Successful where all Remedies FAIL. Ills. book &
proofs free. Address E. HISCOCK, 653 Broadway, New York.

HOW TO MAKE DYNAMO-ELECTRIC
Machines.—By Geo. M. Hopkins. With drawings to scale
and full directions for constructing dynamos of different
sizes. The small machine is intended for experimental
purposes. Will heat from 4 to 6 inches of platinum wire,
produce the electric light, decompose water rapidly,
magnetize steel, ring a large gong, give powerful shocks,
operate induction coils, and will, for temporary use, re-
place 8 or 10 Bunsen cells. Contained in SUPPLEMENTS
161 and 162. Price 10 cents each. The larger ma-
chine produces eight 16-candle lights or one powerful
arc light. Can be arranged to operate about or com-
pound wound machines. Can be run for short-time by
two or four men. Requires one horse power for con-
tinued running. Best engravings of dynamo ever pro-
duced. Details of every part shown. Winding of arma-
ture and field magnet plainly illustrated. Any intel-
ligent person with the aid of these drawings and instruc-
tions may make useful, durable, and effective machines.
Contained in SUPPLEMENT 600. Price 10 cents.
MUNN & CO., PUBLISHERS, 361 Broadway, New York.

QUEEN & CO. MANUFACTURERS AND IMPORTERS
224 CHESTNUT ST. PHILADELPHIA, PENN.

MAGIC LANTERNS
SCIOPTICONS
STEREOPTICONS
FIRST CLASS
PROJECTING APPARATUS
FOR SCHOOLS COLLEGES
AND PUBLIC ENTERTAINMENTS

USEFUL BOOKS.

Manufacturers, Agriculturists, Chemists, Engineers, Me-
chanics, Builders, men of leisure, and professional
men, of all classes, need good books in the line of
their respective callings. Our post office department
permits the transmission of books through the mails
at very small cost. A comprehensive catalogue of
useful books by different authors, on more than fifty
different subjects, has recently been published for
free circulation at the office of this paper. Subjects
classified with names of author. Persons desiring
a copy, have only to ask for it, and it will be mailed
to them. Address,
MUNN & CO., 361 Broadway, New York.

FOR SALE.—Good patent on Novelty. Suitable to
sell by agents or advertising. Only practical machine in
200 patents issued. Address A. G. COX, 564 N. Penn St.,
Indianapolis, Ind.

\$75 PER MONTH SALARY
and expenses paid,
any active man or
woman to sell a
line of Silver
Plated Ware,
Watches and Jew-
elry by sample only; realize at home.
We furnish Terms Free. Full particulars and
sample case free. We mean just what we
say, and do exactly as we agree. Address at once,
Standard Silverware Co., Boston, Mass.

CELEBRATED SUTTON RING PACKING

THE AIR BRUSH

Applies liquid pigment by a jet of air.
Highest awards Franklin and American
Institutes as a legitimate art tool. Success-
fully used by large numbers of the best
crayon, ink, or water color portrait artists
and technical draftsmen. Saves 75 per cent.
of time in shading. Descriptive pamphlet
sent free. It points out one way to earn a
living. Address Air Brush Mfg. Co.,
67 Nassau Street, Rockford, Illinois.

OUR MAGIC LANTERNS
WITH OIL LAMPS HAVE NO EQUAL
VIEWS OF ALL SUBJECTS
EASTERN PRICES GUARANTEED
L. MANASSE
88 MADISON ST. CHICAGO ILL.

Perforated Electric Belting

FOR
SWIFT RUNNING MACHINERY.

Write for Descriptive Catalogue to

CHAS. A. SCHIEREN & CO.
45-51 FERRY ST., NEW YORK.

WATCHMAN'S Improved TIME DETECTOR
with Safety Lock
Attachment. Pat-
ented 1875-6-7-80-81.
Beware of infringe-
ments. This in-
strument is sup-
plied with 12 keys
for 12 stations. In-
valuable for all
concerns employ-
ing night watch-
men. Send for cir-
culars to R. IM-
HAUSER, P.O. Box
2875, 206 and 208
Broadway New York.

Penberthy Automatic Injector.
Cost less than others and does equal work.
Lift 20 feet and work from head as well.
Restart themselves and require no watch-
ing. Will lift through hot pipes, work
from 25 to 150 lbs. pressure. Parts remov-
able without disconnecting, also in-
terchangeable. Send for pamphlet.
Penberthy Injector Co., Detroit, Mich.
Donagan & Swifts, 174 Fulton St.,
New York.
Park & Lacy, San Francisco.
L. M. Rumsey Mfg. Co., St. Louis.

ASBESTOS Fire Felt Coverings,
Packings, Sheathings, &c.
The CHALMERS-SPENCE CO., Mfrs.
419-425 8th Street, East River, N. Y.

FOREIGN PATENTS

THEIR COST REDUCED.

The expenses attending the procuring of patents in
most foreign countries having been considerably re-
duced the obstacle of cost is no longer in the way of a
large proportion of our inventors patenting their inven-
tions abroad.

CANADA.—The cost of a patent in Canada is even
less than the cost of a United States patent, and the
former includes the Provinces of Ontario, Quebec, New
Brunswick, Nova Scotia, British Columbia, and Mani-
toba.

The number of our patentees who avail themselves
of the cheap and easy method now offered for obtaining
patents in Canada is very large, and is steadily increas-
ing.

ENGLAND.—The new English law, which went into
force on Jan. 1st, 1885, enables parties to secure patents
in Great Britain on very moderate terms. A British pa-
tent includes England, Scotland, Wales, Ireland and the
Channel Islands. Great Britain is the acknowledged
financial and commercial center of the world, and her
goods are sent to every quarter of the globe. A good
invention is likely to realize as much for the patentee
in England as his United States patent produces for
him at home, and the small cost now renders it possible
for almost every patentee in this country to secure a pa-
tent in Great Britain, where his rights are as well pro-
tected as in the United States.

OTHER COUNTRIES.—Patents are also obtained
on very reasonable terms in France, Belgium, Germany,
Austria, Russia, Italy, Spain (the latter includes Cuba
and all the other Spanish Colonies), Brazil, British India
Australia, and the other British Colonies.

An experience of over FORTY years has enabled the
publishers of THE SCIENTIFIC AMERICAN to establish
competent and trustworthy agencies in all the principal
foreign countries, and it has always been their aim to
have the business of their clients promptly and properly
done and their interests faithfully guarded.

A pamphlet containing a synopsis of the patent laws
of all countries, including the cost for each, and other
information useful to persons contemplating the pro-
curing of patents abroad, may be had on application to
this office.


MUNN & CO., Editors and Proprietors of THE SCI-
ENTIFIC AMERICAN, cordially invite all persons desiring
any information relative to patents, or the registry of
trade-marks, in this country or abroad, to call at their
offices, 361 Broadway. Examination of inventions, con-
sultation, and advice free. Inquiries by mail promptly
answered.

Address, **MUNN & CO.,**
Publishers and Patent Solicitors,
361 Broadway, New York.

BRANCH OFFICES: No. 622 and 624 F Street, Pacific
Buildg, near 7th Street, Washington, D. C.

NOW READY.

Experimental Science,

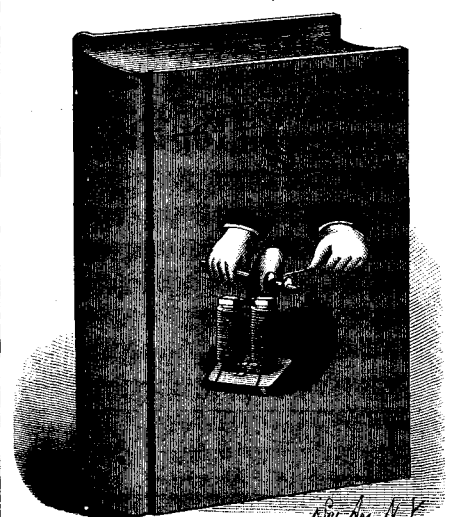

BY GEO. M. HOPKINS.

740 Pages. 680 Illustrations.

PRICE, by mail, postpaid, . . . \$4.00

SEND for FREE ILLUSTRATED CIRCULAR and
Table of Contents.

MUNN & CO., Publishers,

Office of The Scientific American,

361 Broadway, New York.

Proposals for Installing an Electric Lighting
Plant at the Navy Yard, New York.—BUREAU
OF YARDS AND DOCKS, Navy Department, Washington,
D. C., December 16, 1888.—Sealed proposals, in duplicate,
endorsed "Proposals for Electric Lighting Plant for
New York Navy Yard," will be received at this Bureau
until 11 o'clock A. M. on Tuesday, January 14, 1889, and
publicly opened immediately thereafter. Specifications
and blank forms of proposals will be furnished, and plan
of the yard may be examined upon application to the
Commandant of the New York Navy Yard or the Bureau.
Responsible security will be required for the faithful
performance of the contract, and the right is reserved
to reject any or all proposals not deemed advantageous
to the Government, and to waive defects. A bond for
the sum of two thousand (\$2,000) dollars must accom-
pany bids for the work. G. B. WHITE, Chief of Bureau.

THE PENNA. DIAMOND DRILL & MFG. CO.
BIRDSBORO, PA., Builders of High Class
Steam Engines, Diamond Drilling and General
Machinery. Flour Mill Rolls Ground and Grooved.

ARCHITECTURAL BOOKS.

Useful, Beautiful, and Cheap.

To any person about to erect a dwelling house or stable,
either in the country or city, or any builder wishing
to examine the latest and best plans for a church, school
house, club house, or any other public building of high
or low cost, should procure a complete set of the ARCHI-
TECTS' AND BUILDERS' EDITION of the SCIENTIFIC
AMERICAN.

The information these volumes contain renders the
work almost indispensable to the architect and builder,
and to persons about to build for themselves they will
find the work suggestive and most useful. They contain
colored plates of the elevation, plan, and detail draw-
ings of almost every class of building, with specifica-
tion and approximate cost.

Eight bound volumes are now ready and may be ob-
tained, by mail, direct from the publishers or from any
newsdealer. Price, \$2.00 a volume. Stitched in paper
covers. Subscription price, per annum, \$2.50. Address
and remit to

MUNN & CO., Publishers,
361 Broadway, New York.

THE PATENTS of all Countries on a CARROU-
SEL (the only one of its kind) are for sale, or to be
disposed of by way of license. For particulars apply
to INGENIEUR N. REIF, Worthstrasse 25, Hanover
(Germany).

FOR SALE.—\$500. Patent No. 334,043. Screw Driver
Attachment. Lee Kiblinger, Patentee, Jackson, La.

FOR SALE.—State Rights, other than New York, New
Jersey, Rhode Island, and Conn., of Gaume's Patent
Motor for operating cradles and other swinging devices.
Apply to A. Bonner, 77 George St., Brooklyn, N. Y.

The Scientific American

PUBLICATIONS FOR 1890.

The prices of the different publications in the United
States, Canada, and Mexico are as follows:

RATES BY MAIL.
The Scientific American (weekly), one year \$3.00
The Scientific American Supplement (weekly), one
year 5.00
The Scientific American, English Edition (monthly)
one year 3.00
The Scientific American, Architects and Builders
Edition (monthly), one year 2.50

COMBINED RATES.
The Scientific American and Supplement, . . . \$7.00
The Scientific American and Architects and Build-
ers Edition, . . . 5.00
The Scientific American, Supplement, and Archi-
tects and Builders Edition, . . . 4.50

Proportionate Rates for Six Months.
This includes postage, which we pay. Rem-
it by express money order, or draft to order of
MUNN & CO., 361 Broadway, New York.

Advertisements.

Inside Page, each insertion - - - 25 cents a line.
Back Page, each insertion - - - \$1.00 a line.
The above are charges per square line—about eight words per line. This notice shows the width of the line, and is set in square type. Engravings may be advertised at the same rate per square line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.



Wheeling is Better than Walking.

Victor Bicycles

Are Better than Any Others.
Catalogue Free.

Overman Wheel Co., Makers,
BOSTON, MASS.

THE COPYING PAD.—HOW TO MAKE
and how to use; with an engraving. Practical directions how to prepare the gelatine pad, and also the aniline ink by which the copies are made; how to apply the written letter to the pad; how to take off copies of the letter. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 438. Price 10 cents. For sale at this office and by all newsdealers in all parts of the country.

**THE ONLY PRACTICAL
LOW-PRICED \$15
TYPEWRITER**

Catalogue free. Address Typewriter Department,
POPE MFG. CO., Makers of Columbia Cycles,
Boston, New York, Chicago.

COPPER TUBES
SHEET BRASS BRASS WIRE
SEND FOR CATALOGUE
175 W. LAKE ST. CHICAGO

ICE-BOATS—THEIR CONSTRUCTION
and management. With working drawings, details, and directions in full. Four engravings showing mode of construction. Views of the two fastest ice-sailing boats used on the Hudson river in winter. By H. A. Horsfall, M.E. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 1. The same number also contains the rules and regulations for the formation of ice-boat clubs, the sailing and management of ice-boats. Price 10 cents.

**The CHANDLER
WATER MOTOR**
as adapted for blowing
ORGANS.
Automatic, Noiseless.
Send for Circulars.
Howard Bros., Buffalo, N. Y.

Scientific Book Catalogue

RECENTLY PUBLISHED.
Our new catalogue containing over 100 pages, including works on more than fifty different subjects. Will be mailed free to any address on application.
MUNN & CO., Publishers Scientific American,
361 Broadway, New York.

2 to 40 H. P.
The MOTOR of 19th CENTURY.
Can be used Any Place, to do Any Work, and by Any One. No Boiler! No Fire! No Steam! No Ashes! No Gauges! No Engineer! A perfectly safe motor for all places and purposes. Cost of operation about one cent an hour to each indicated horse power. For circulars, etc., address
Charter Gas Engine Co.,
Simplicity, Safety, P. O. Box 148, Sterling, Ill.

TYPEWRITERS

Send for New Illustrated Catalogue describing all Machines. Largest stock in America.
New or Second-hand Typewriters of all makes. Machines Rented in any part of the country. Supplies in abundance. Prices the lowest.
NATIONAL TYPEWRITER EXCHANGE,
161 La Salle Street, Chicago, Ill.

CONTRACTORS
WE MAKE THE LARGEST LINE OF ROAD GRADERS, SCRAPERS, PLOWES, AND ALL THE WORLD'S LARGEST LINE OF WELLBORING TOOLS IN THE WORLD.
NEW ERA
Railroad Builder, Wagon Road Grader, Wagon Loader, and Ditching Machine. It will place in an embankment 1000 cubic yards of earth in 10 hours at a cost of 1 1/2 to 2 1/2 cts. per yd.
CARPENTER ST., CARROLL AVE.—CHICAGO, ILL. U.S.A.

PATENTS!

MESSRS. MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine improvements, and to act as Solicitors of Patents for Inventors.
In this line of business they have had forty-one years' experience, and now have unequalled facilities for the preparation of Patent Drawings, Specifications, and the prosecution of Applications for Patents in the United States, Canada, and Foreign Countries. Messrs. Munn & Co. also attend to the preparation of Caveats, Copyrights for Books, Labels, Reissues, and Reports on Infringements of Patents. All business entrusted to them is done with speed and promptness, on very reasonable terms.
A pamphlet sent free of charge, on application, containing full information about Patents and how to procure them: directions concerning Labels, Copyrights, Designs, Patents, Appeals, Reissues, Infringements, Assignments, Rejected Cases. Hints on the Sale of Patents, etc.
Also send, free of charge, a Synopsis of Foreign Patents, showing the cost and method of securing them in all the principal countries of the world.
MUNN & CO., Solicitors of Patents,
361 Broadway, New York.
OFFICES.—No. 622 and 624 F Street, Washington, D. C.



ON GAS ENGINES.—A VALUABLE
paper by E. Delamare-Deboutville, touching upon the history of gas motors in general, and describing in detail the "Simplex" engine invented by the author and Mr. Malandin. With 23 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 715 and 716. Price 10 cents each. To be had at this office and from all newsdealers.



SAWS Wanted 50,000 Sawyers and Lumbermen to send us their full address for a copy of Emerson's "Sawyer" and "Lumberman" and to introduce NATURAL GAS for heating and tempering Saws with wonderful effect upon improving their quality and toughness, enabling us to reduce prices. Address
EMERSON, SMITH & CO. (Ltd.),
Beaver Falls, Pa.

THE STORAGE OF ELECTRICITY.
A valuable review of the present aspect of storage battery development, with a comparison of different cells, and their weight and capacity. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 687. Price ten cents. To be had at this office and from all newsdealers.

TO BUSINESS MEN

The value of the SCIENTIFIC AMERICAN as an advertising medium cannot be overestimated. Its circulation is many times greater than that of any similar journal now published. It goes into all the States and Territories, and is read in all the principal libraries and reading rooms of the world. A business man wants something more than to see his advertisement in a printed newspaper. He wants circulation. This he has when he advertises in the SCIENTIFIC AMERICAN. And do not let the advertising agent influence you to substitute some other paper for the SCIENTIFIC AMERICAN, when selecting a list of publications in which you decide it is for your interest to advertise. This is frequently done, for the reason that the agent gets a larger commission from the papers having a small circulation than is allowed on the SCIENTIFIC AMERICAN.
For rates see top of first column of this page, or address
MUNN & CO., Publishers,
361 Broadway, New York.

THE FRED'K CRANE CHEMICAL CO.
SHORT HILLS, N. J. BOX 91A
PAINTS, BRUSH & DIP, LACQUERS, VARNISH, SHELLS, BLACKS, BRILLIANT & DEAD, JAPANS, AIR DRYING, ENAMELS, TRANSPARENT, FOR METAL AND WOOD, PROOF AGAINST ACIDS AND ALKALIES.
—WRITE FOR CATALOGUE—

WEITMYER PATENT FURNACE.—BOILERS OF EVERY DESCRIPTION.
IDE AUTOMATIC ENGINES. Traction and Portable Engines.
STEAM ROAD ROLLERS.
Manufactured by FOUNDRY & MACHINE DEPT., Harrisburg, Pa., U. S. A.

ELECTRO MOTOR, SIMPLE, HOW TO
make. By G. M. Hopkins.—Description of a small electro motor devised and constructed with a view to assisting amateurs to make a motor which might be driven with advantage by a current derived from a battery, and which would be sufficient power to operate a foot lathe or any machine requiring not over one man power. With 11 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 641. Price 10 cents. To be had at this office and from all newsdealers.

THE LUNKENHEIMER BRASS MFG CO.
IS EAST EIGHTH ST. CINCINNATI
RE-GRINDING GLOBE & CHECK VALVES,
GATE VALVES, POP SAFETY VALVES,
SIGHT FEED LUBRICATORS OIL & GREASE CUPS,
BRASS & PHOSPHOR BRONZE CASTINGS.

THE AMERICAN BELL TELEPHONE CO.
95 MILK ST., BOSTON, MASS.

This Company owns the Letters Patent granted to Alexander Graham Bell, March 7th, 1876, No. 174,465, and January 30th, 1877, No. 186,787.

The transmission of Speech by all known forms of Electric Speaking Telephones infringes the right secured to this Company by the above patents, and renders each individual user of telephones not furnished by it or its licensees responsible for such unlawful use, and all the consequences thereof, and liable to suit therefor.

BARREL, KEG, Hogshead, AND STAVE MACHINERY.
Over 50 varieties manufactured by
E. & B. HOLMES,
BUFFALO, N. Y.
Chamfering, Howeling, and Crozing.

DRY AIR REFRIGERATING MACHINE.
Description of Hall's improved horizontal dry air refrigerator, designed to deliver about 10,000 cubic feet of cold air per hour, when running at a speed of 100 revolutions per minute, and capable of reducing the temperature of 90° above to 50° below zero. With five figures, showing plan and side elevation of the apparatus, and diagrams illustrative of its performance. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 288. Price 10 cents. To be had at this office and from all newsdealers.


CUTLER DESK BEST IN THE WORLD.
A. CUTLER & SON,
BUFFALO, N. Y. U. S. A.

THE ORIGINAL UNVULCANIZED PACKING
CALLED THE STANDARD—As it is the Packing by which all others are compared.
Accept no packing as JENKINS PACKING unless stamped with our "Trade Mark."
JENKINS BROS. { 71 John Street, N. Y.
105 Milk Street, Boston.
21 North 5th St., Phila.
54 Dearborn St., Chicago.

POP SAFETY VALVE
WATER RELIEF VALVE
IMPROVED STEAM GAGE
STEAM ENGINE INDICATOR
Single Bell Chime Whistle, and all instruments used in connection with Steam, Air and Water.
Sole Agents for Clark's Lumen Fire Hose.
NEW YORK. LONDON.
CROSBY STEAM GAGE & VALVE CO. 98 Oliver St. Boston, Mass.

INVENTORS and others desiring new articles manufactured and introduced, address P. O. Box 86, Cleveland, O.

REMINGTON

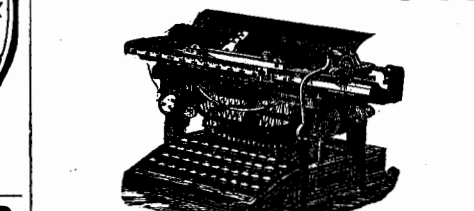

STANDARD TYPEWRITER.
Gold Medal—Paris Exposition, 1889.

Wyckoff, Seamans & Benedict
327 BROADWAY, NEW YORK.



THE STANDARD
H.W. JOHNS ASBESTOS
BOILER COVERINGS
H.W. JOHNS MFG. CO.
87 MAIDEN LANE, NEW YORK.
PATENTED
CHICAGO, PHILADELPHIA, LONDON.

DRYING PLANT FOR WET FEED.
Description, by S. E. Worrell, of a plant designed to be built in connection with starch factories, breweries, etc., having a surplus of waste steam power, and for the economic drying of wet products. With 2 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 716. Price 10 cents. To be had at this office and from all newsdealers.

BARNES' PAT. FOOT POWER MACHINERY.
I feel so highly pleased with your Velocipede Foot Power with seat, that I wish to add my testimony to its superiority. I did not expect to like it, but having used the Velocipede Power, I would have nothing else. It so greatly lessens the fatigue of using foot power, in fact, it may be said to be almost without fatigue, and is a steady motion. I only wish I had known of it sooner. Send for catalogue.
W. F. & J. BARNES CO., 999 Ruby St., Rockford, Ill.

A NEW CATALOGUE
OF
A VALUABLE PAPERS
Contained in SCIENTIFIC AMERICAN SUPPLEMENT, sent free of charge to any address.
MUNN & CO., 361 Broadway, New York.

NICKEL AND ELECTRO-PLATING APPARATUS AND MATERIAL
HANSON, VAN WINKLE & CO.
NEWARK, N. J.
92 LIBERTY ST. N. Y.

PASTEURIZATION OF FERMENTABLE
Liquids.—Description of the Kuhn apparatus for the production of beer of durable fluidity, based upon the method discovered by Pasteur. With 3 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 718. Price 10 cents. To be had at this office and from all newsdealers.


2nd MACHINERY
N. Y. Mach'y Depot, Bridge Store 16, Frankfort St., N. Y.

VIOLINS EXCHANGED
Do not use a violin you are dissatisfied with. I will take it in trade.
Write me.
Send 4-cent stamp for beautifully illustrated 96-page catalogue of Violins, Guitars, Banjos, Cornets, Flutes, Strings of all kinds, Harmonicas, Music Boxes, etc. Lowest prices. Mail orders a specialty.
C. W. STORY, 26 Central St., Boston, Mass.

AUTOCOPYIST Duplicating Apparatus. Simplified Lithography. The Best Copying Process. Samples Free. Headquarters, Ten Eyck & Parker, 66 Pine Street, New York.



Established
largest Elevator
BROTHERS
Park Row, N
offices in nea
the globe. E
Freight. They are smooth, economical, and above all SAFE.



COMPTOMETER
ALL ARITHMETICAL PROBLEMS
Solved rapidly and accurately by using the Comptometer. Saves 40 per cent. of time. Entire relief from mental strain. Adapted to all commercial and scientific computations. Send for circular.

FELT & TARRANT MFG. CO., 52-56 Illinois St., Chicago.

OPTICAL TORQUE.—A VERY INTERESTING
paper by Prof. Sylvanus P. Thompson. Illustration of the fundamental facts about the plane of polarization of light and its twisting. Methods of precisely measuring the amount of optical torque produced by various substances. Magnetic crystalline and molecular methods of producing optical torsion in the case of light previously polarized in a given plane. Nature of the torque or twisting force. With 23 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 710 and 716. Price 10 cents each. To be had at this office and from all newsdealers.

MALLEABLE AND FINE GRAY IRON ALSO STEEL CASTINGS FROM SPECIAL PATTERNS
FINE TINNING JAPANNING AND FINISHING
THOMAS DEVLIN & CO.
LEHIGH AVE. & AMERICAN ST. PHILA.

THE Scientific American

ESTABLISHED 1846.
The Most Popular Scientific Paper in the World.

Only \$3.00 a Year, including Postage. Weekly.
52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Teleggraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc. Complete List of Patents each week.

Terms of Subscription.—One copy of the SCIENTIFIC AMERICAN will be sent for one year—52 numbers—postage prepaid, to any subscriber in the United States, Canada or Mexico, on receipt of three dollars by the publishers; six months, \$1.50; three months, \$1.00.

Clubs.—Special rates for several names, and to Post Masters. Write for particulars.
The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all orders, drafts, etc., payable to
MUNN & CO.,
361 Broadway, New York.

THE Scientific American Supplement.

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages full of engravings, many of which are taken from foreign papers, and accompanied with translated descriptions. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archaeology, Astronomy, Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information obtainable in no other publication.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are illustrated and described in the SUPPLEMENT.
Price for the SUPPLEMENT for the United States and Canada, \$5.00 a year, or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year for \$7.00. Single copies 10 cents. Address and remit by postal order, express money order, or check.
MUNN & CO., 361 Broadway, N. Y.,
Publishers SCIENTIFIC AMERICAN.

Building Edition.

THE SCIENTIFIC AMERICAN ARCHITECTS' AND BUILDERS' EDITION is issued monthly. \$2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming a large and splendid Magazine of Architecture, richly adorned with elegant plates in colors, and with other fine engravings; illustrating the most interesting examples of modern Architectural Construction and allied subjects.

A special feature is the presentation in each number of a variety of the latest and best plans for private residences, city and country, including those of very moderate cost as well as the more expensive. Drawings in perspective and in color are given, together with full Plans, Specifications, Sheets of Details, Estimates, etc.

The elegance and cheapness of this magnificent work have won for it the Largest Circulation of any Architectural publication in the world. Sold by all newsdealers. \$2.50 a year. Remit to
MUNN & CO., Publishers,
361 Broadway, New York.

PRINTING INKS.
THE "Scientific American" is printed with CHAS. T. JENU JOHNSON & CO.'S INK. Tenth and Lombard Sts., Phila., and 47 Rose St., opp. Duane St., N. Y.